

## LM185QML

# Adjustable Micropower Voltage References

## General Description

The LM185 are micropower 3-terminal adjustable band-gap voltage reference diodes. Operating from 1.24 to 5.3V and over a 10 $\mu$ A to 20mA current range, they feature exceptionally low dynamic impedance and good temperature stability. On-chip trimming is used to provide tight voltage tolerance. Since the LM185 band-gap reference uses only transistors and resistors, low noise and good long-term stability result.

Careful design of the LM185 has made the device tolerant of capacitive loading, making it easy to use in almost any reference application. The wide dynamic operating range allows its use with widely varying supplies with excellent regulation.

The extremely low power drain of the LM185 makes it useful for micropower circuitry. This voltage reference can be used to make portable meters, regulators or general purpose analog circuitry with battery life approaching shelf life. Further, the wide operating current allows it to replace older references with a tighter tolerance part.

## Features

- Adjustable from 1.24V to 5.30V
- Operating current of 10 $\mu$ A to 20mA
- 1 $\Omega$  dynamic impedance
- Low temperature coefficient

## Ordering Information


NS Part Number	SMD Part Number	NS Package Number	Package Description
LM185BE/883		E20A	20LD Leadless Chip Carrier
LM185BH/883		H03H	3LD; T0-46 Metal Can
LM185BYH/883		H03H	3LD; T0-46 Metal Can
LM185BYH-SMD	5962-9091401MXA	H03H	3LD; T0-46 Metal Can

## Connection Diagrams


T0-46  
Metal Can Package



20-Leadless Chip Carrier

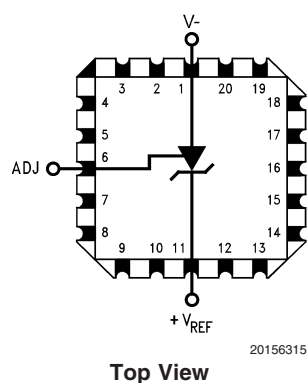


## Block Diagram



20156313

## Schematic Diagram

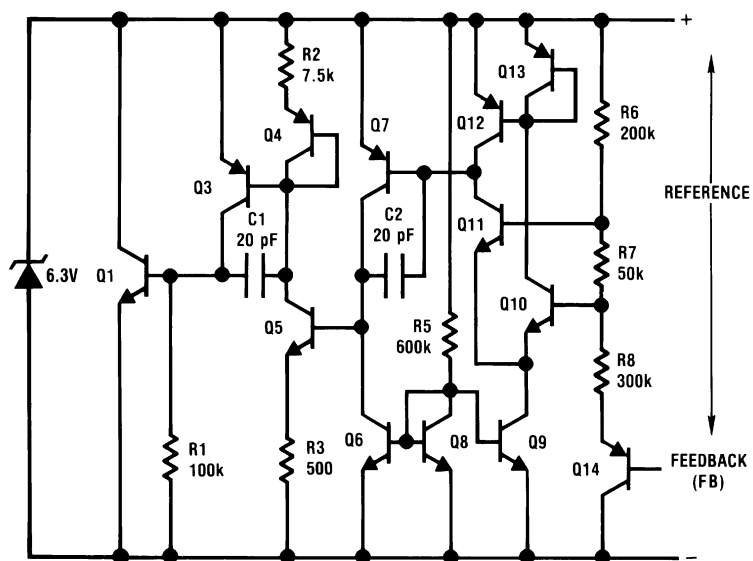

20156308

## Absolute Maximum Ratings (Note 1)

Reverse Current	30mA
Forward Current	10mA
Operating Temperature Range	$-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$
Storage Temperature	$-55^{\circ}\text{C} \leq T_A \leq 150^{\circ}\text{C}$
Maximum Junction Temperature $T_{Jmax}$	150°C
Lead Temperature (soldering, 10 seconds)	300°C
Thermal Resistance	
$\theta_{JA}$	
LCC Package (Still Air)	100°C/W
LCC Package (500LF/Min Air flow)	73°C/W
Metal Can Package (Still Air)	300°C/W
Metal Can Package (500LF/Min Air flow)	139°C/W
$\theta_{JC}$	
LCC Package	25°C/W
Metal Can Package	57°C/W
Package Weight (Typical)	
LCC Package	TBD
Metal Can Package	TBD
ESD Tolerance (Note 2)	500V

## Quality Conformance Inspection

Mil-Std-883, Method 5005 - Group A

Subgroup	Description	Temp °C
1	Static tests at	25
2	Static tests at	125
3	Static tests at	-55
4	Dynamic tests at	25
5	Dynamic tests at	125
6	Dynamic tests at	-55
7	Functional tests at	25
8A	Functional tests at	125
8B	Functional tests at	-55
9	Switching tests at	25
10	Switching tests at	125
11	Switching tests at	-55
12	Settling time at	25
13	Settling time at	125
14	Settling time at	-55

## LM185B Electrical Characteristics

### DC Parameters

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
$V_{Ref}$	Reference Voltage	$I_R = 100\mu A$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$I_R = 9\mu A$		1.228	1.252	V	1
		$I_R = 10\mu A$		1.215	1.255	V	2, 3
		$I_R = 1mA$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$I_R = 20mA$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3V, I_R = 100\mu A$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3V, I_R = 45\mu A$		1.288	1.252	V	1
		$V_R = 5.3V, I_R = 50\mu A$		1.215	1.255	V	2, 3
		$V_R = 5.3V, I_R = 1.0mA$		1.288	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3V, I_R = 20mA$		1.288	1.252	V	1
				1.215	1.255	V	2, 3
$\Delta V_{Ref}/\Delta I_R$	Reference Voltage Change with Current	$9\mu A \leq I_R \leq 1mA$			1.0	mV	1
		$10\mu A \leq I_R \leq 1mA$			1.5	mV	2, 3
		$1mA \leq I_R \leq 20mA$			10	mV	1
					20	mV	2, 3
		$V_R = 5.3V, 45\mu A \leq I_R \leq 1mA$			1.0	mV	1
		$V_R = 5.3V, 50\mu A \leq I_R \leq 1mA$			1.5	mV	2, 3
		$V_R = 5.3V, 1mA \leq I_R \leq 20mA$			10	mV	1
					20	mV	2, 3
$\Delta V_{Ref} / \Delta V_O$	Reference Voltage Change with Output Voltage	$V_R = 5.3V, I_R = 100\mu A$			3.0	mV	1
					6.0	mV	2, 3
$I_F$	Feedback Current	$I_R = 9\mu A$			20	nA	1
		$I_R = 10\mu A$			25	nA	2, 3
		$I_R = 20mA$			20	nA	1
					25	nA	2, 3
		$V_R = 5.3V, I_R = 45\mu A$			20	nA	1
		$V_R = 5.3V, I_R = 50\mu A$			25	nA	2, 3
		$V_R = 5.3V, I_R = 20mA$			20	nA	1
					25	nA	2, 3
$I_C$	Minimum Operating Current	$V_R = V_{Ref}$	(Note 3)	9.0		$\mu A$	1
			(Note 3)	10		$\mu A$	2, 3
		$V_R = 5.3V$	(Note 3)	45		$\mu A$	1
			(Note 3)	50		$\mu A$	2, 3

## LM185BY Electrical Characteristics

### DC Parameters

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
$V_{Ref}$	Reference Voltage	$I_R = 100\mu A$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$I_R = 9\mu A$		1.228	1.252	V	1
		$I_R = 10\mu A$		1.215	1.255	V	2, 3
		$I_R = 1mA$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$I_R = 20mA$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3V, I_R = 100\mu A$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3V, I_R = 45\mu A$		1.288	1.252	V	1
		$V_R = 5.3V, I_R = 50\mu A$		1.215	1.255	V	2, 3
		$V_R = 5.3V, I_R = 1.0mA$		1.288	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3V, I_R = 20mA$		1.288	1.252	V	1
				1.215	1.255	V	2, 3
$\Delta V_{Ref}/\Delta I_R$	Reference Voltage Change with Current	$9\mu A \leq I_R \leq 1mA$			1.0	mV	1
		$10\mu A \leq I_R \leq 1mA$			1.5	mV	2, 3
		$1mA \leq I_R \leq 20mA$			10	mV	1
					20	mV	2, 3
		$V_R = 5.3V, 45\mu A \leq I_R \leq 1mA$			1.0	mV	1
		$V_R = 5.3V, 50\mu A \leq I_R \leq 1mA$			1.5	mV	2, 3
		$V_R = 5.3V, 1mA \leq I_R \leq 20mA$			10	mV	1
					20	mV	2, 3
$\Delta V_{Ref} / \Delta V_O$	Reference Voltage Change with Output Voltage	$V_R = 5.3V, I_R = 100\mu A$			3.0	mV	1
					6.0	mV	2, 3
$I_F$	Feedback Current	$I_R = 9\mu A$			20	nA	1
		$I_R = 10\mu A$			25	nA	2, 3
		$I_R = 20mA$			20	nA	1
					25	nA	2, 3
		$V_R = 5.3V, I_R = 45\mu A$			20	nA	1
		$V_R = 5.3V, I_R = 50\mu A$			25	nA	2, 3
		$V_R = 5.3V, I_R = 20mA$			20	nA	1
					25	nA	2, 3
$I_C$	Minimum Operating Current	$V_R = V_{Ref}$	(Note 3)	9.0		$\mu A$	1
			(Note 3)	10		$\mu A$	2, 3
		$V_R = 5.3V$	(Note 3)	45		$\mu A$	1
			(Note 3)	50		$\mu A$	2, 3
$T_C$	Temperature Coefficient		(Note 4)		50	PPM/ $^{\circ}C$	1, 2, 3

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.


**Note 2:** Human body model, 1.5 k $\Omega$  in series with 100 pF.

**Note 3:** Functional test.

**Note 4:** The average temperature coefficient is defined as the maximum deviation of reference voltage, at all measured temperatures between the operating  $T_{Min}$  &  $T_{Max}$ , divided by  $(T_{Max} - T_{Min})$ . The measured temperatures ( $T_{Measured}$ ) are  $-55^{\circ}C$ ,  $25^{\circ}C$ , &  $125^{\circ}C$  or  $\Delta V_{Ref} / (T_{Max} - T_{Min})$


## Typical Performance Characteristics

Temperature Drift of 3  
Representative Units

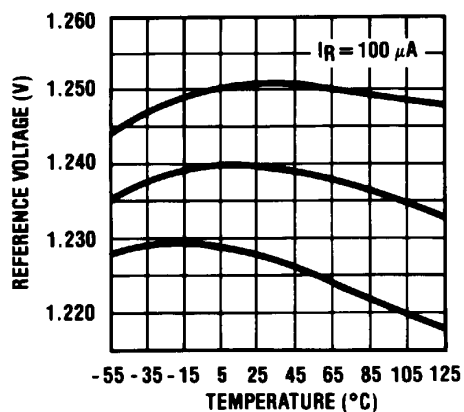


20156316

Feedback Current

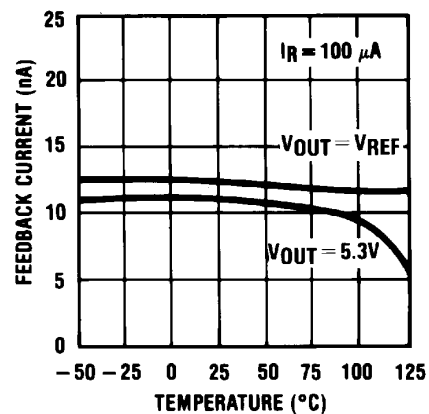


20156317

Minimum Operating Current

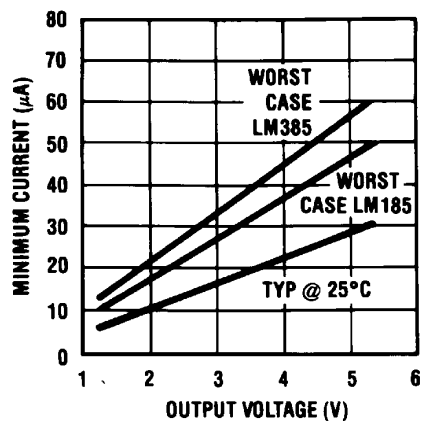


20156318

Reverse Characteristics

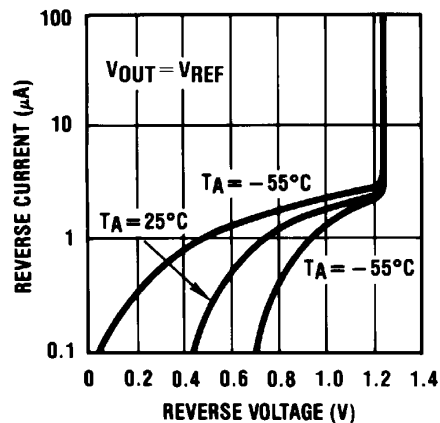


20156319

Reverse Characteristics

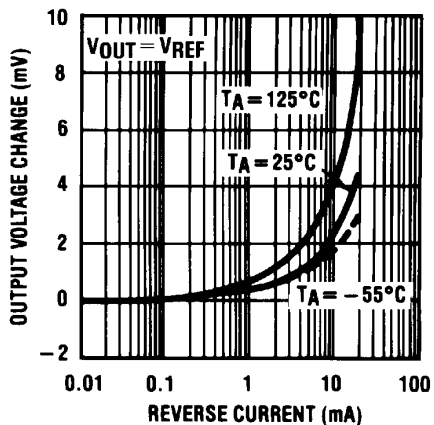


20156320

Forward Characteristics

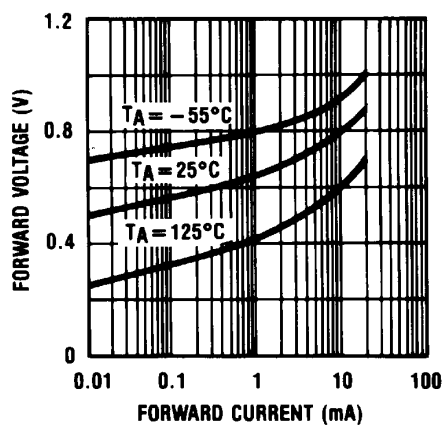


20156321


## Typical Performance Characteristics (Continued)

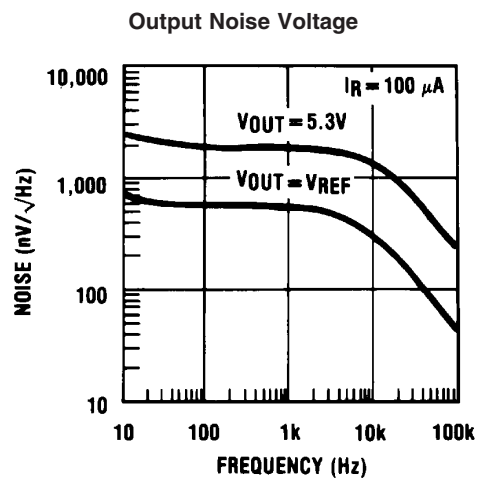

20156322


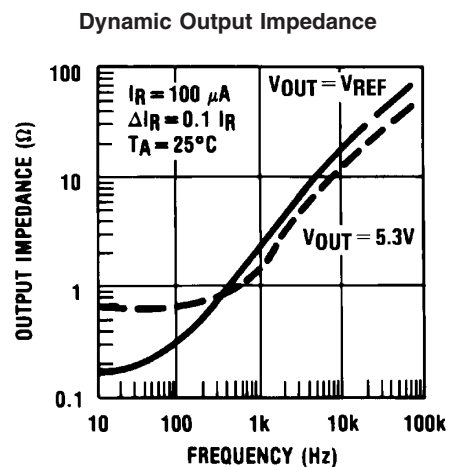


20156323

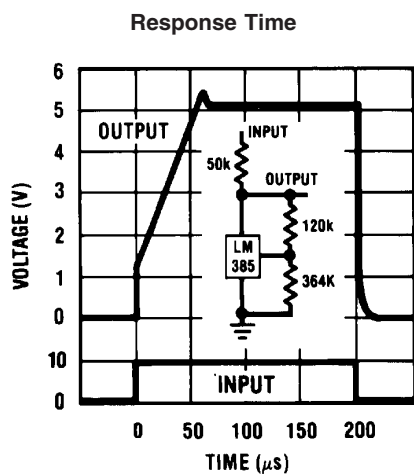

20156324


### Temperature Coefficient Typical LM185

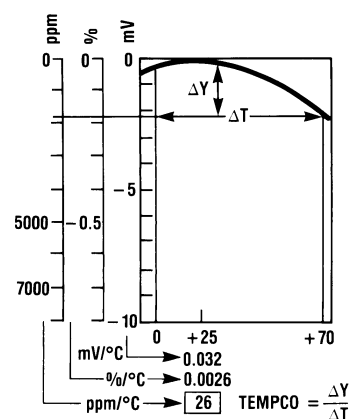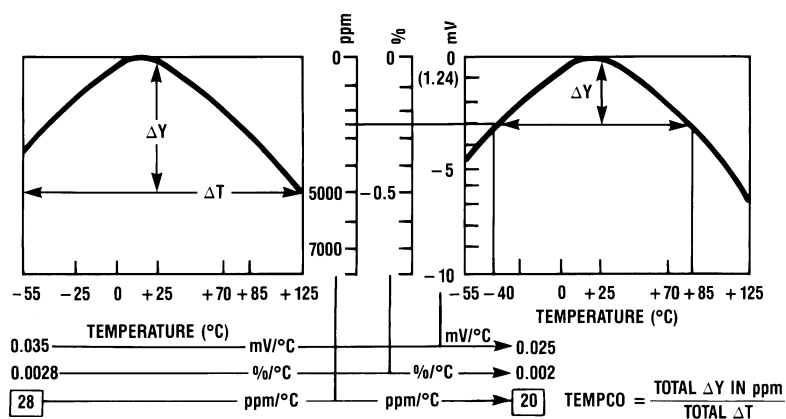

20156304


## Typical Applications

Precision 10V Reference

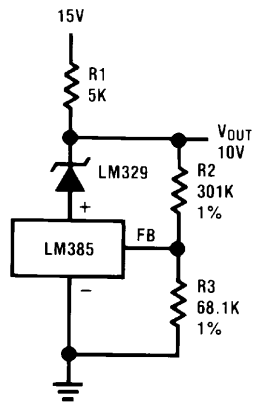


20156325

Low AC Noise Reference

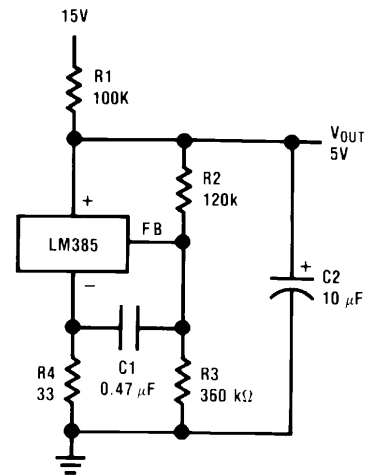


20156326

25V Low Current Shunt Regulator

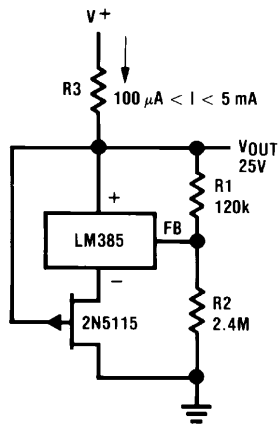

20156327

200 mA Shunt Regulator

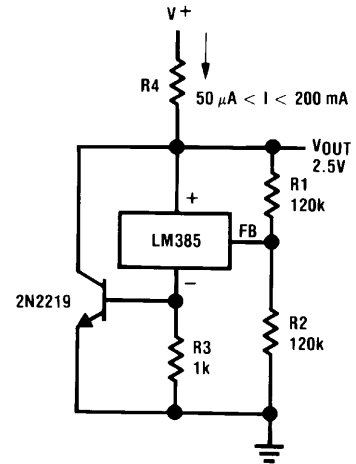


20156328




## Typical Applications (Continued)

### Series-Shunt 20 mA Regulator

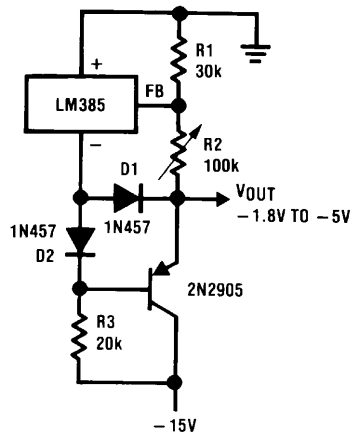


20156329

### High Efficiency Low Power Regulator

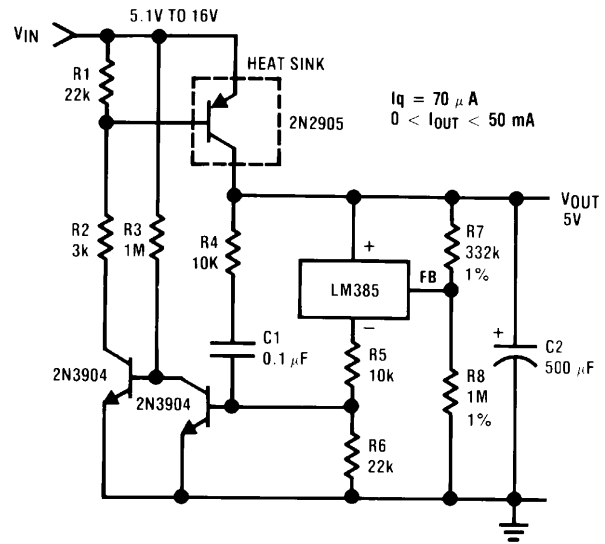


20156330

### Voltage Level Detector




20156331

### Voltage Level Detector




20156332

### Fast Positive Clamp $2.4V + \Delta V_{D1}$

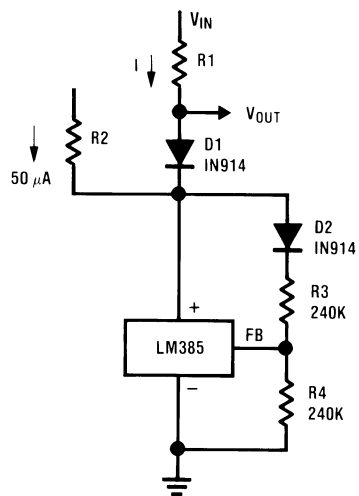

20156333


### Bidirectional Clamp $\pm 2.4V$

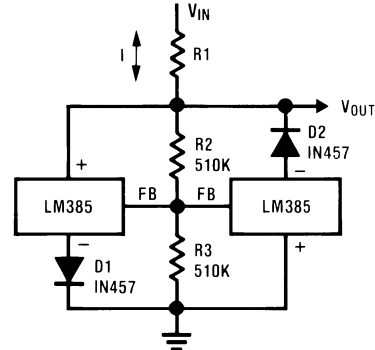

20156334


## Typical Applications (Continued)

**Bidirectional Adjustable Clamp**  
 $\pm 1.8V$  to  $\pm 2.4V$

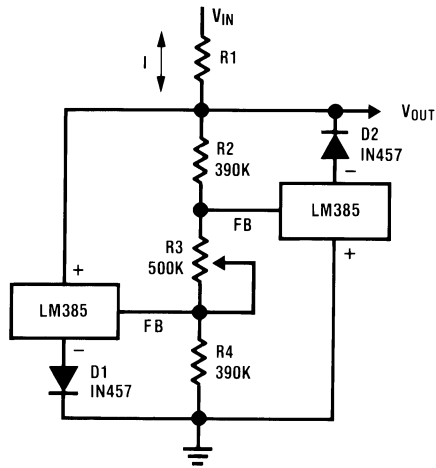


20156335

**Bidirectional Adjustable Clamp**  
 $\pm 2.4V$  to  $\pm 6V$

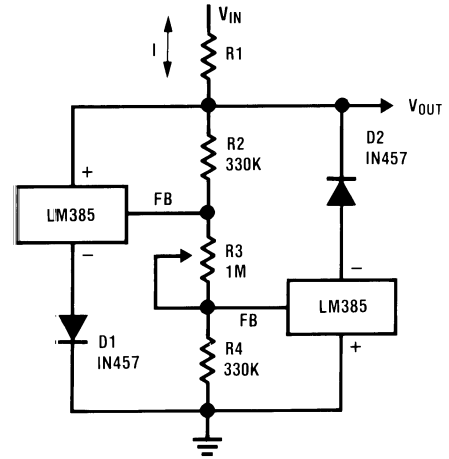


20156336

**Simple Floating Current Detector**

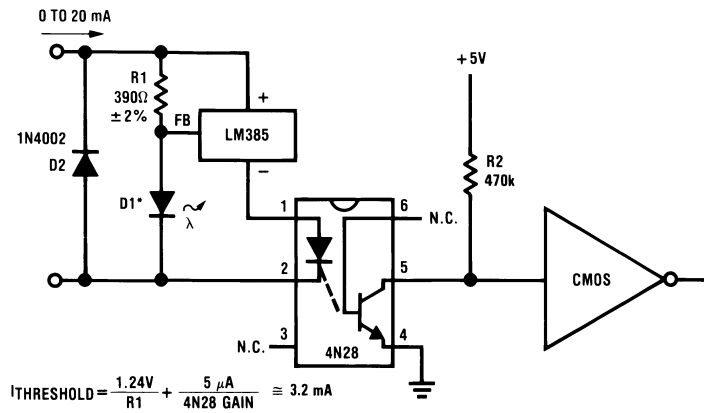

20156337


**Current Source**

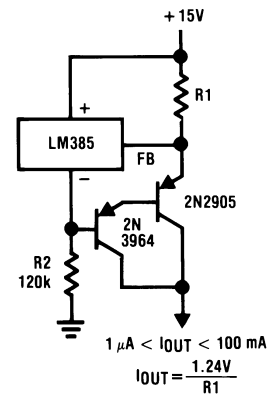

20156338

# Typical Applications (Continued)


## Precision Floating Current Detector

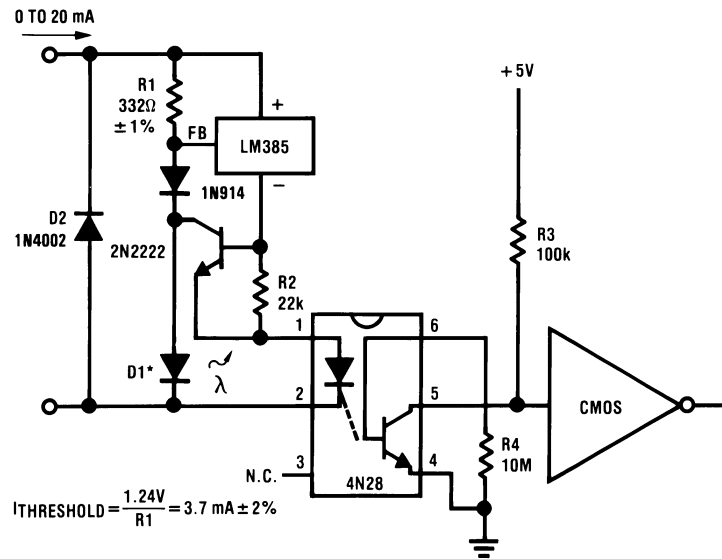

20156339


\*D1 can be any LED,  $V_F=1.5V$  to  $2.2V$  at  $3 \text{ mA}$ . D1 may act as an indicator. D1 will be on if  $I_{THRESHOLD}$  falls below the threshold current, except with  $I=0$ .

## Centigrade Thermometer, $10\text{mV}/^\circ\text{C}$

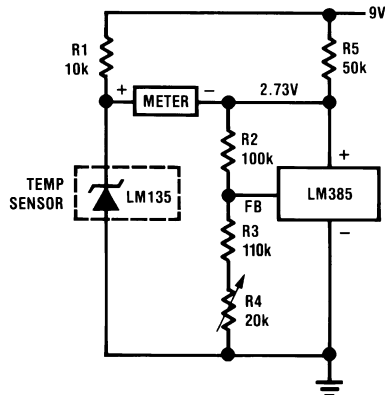


20156311

## Freezer Alarm

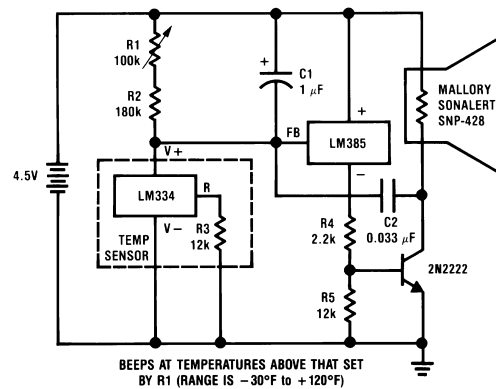


20156312

## 1.2V Reference



20156314

## 5.0V Reference

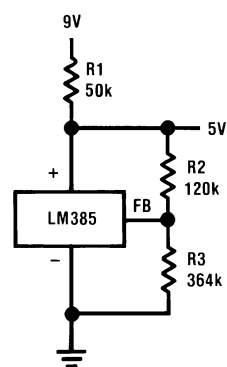


20156302

$$V_{OUT} = 1.24 \left( \frac{R3}{R2} + 1 \right)$$

**Revision History Section**

Released	Revision	Section	Originator	Changes
11/08/05	A	New Release, Corporate format	L. Lytle	2 MDS data sheets converted into one Corp. data sheet format. MNLM185B-X Rev 0B0 and MNLM185BY-X Rev 0B0 will be archived.


# Physical Dimensions inches (millimeters) unless otherwise noted

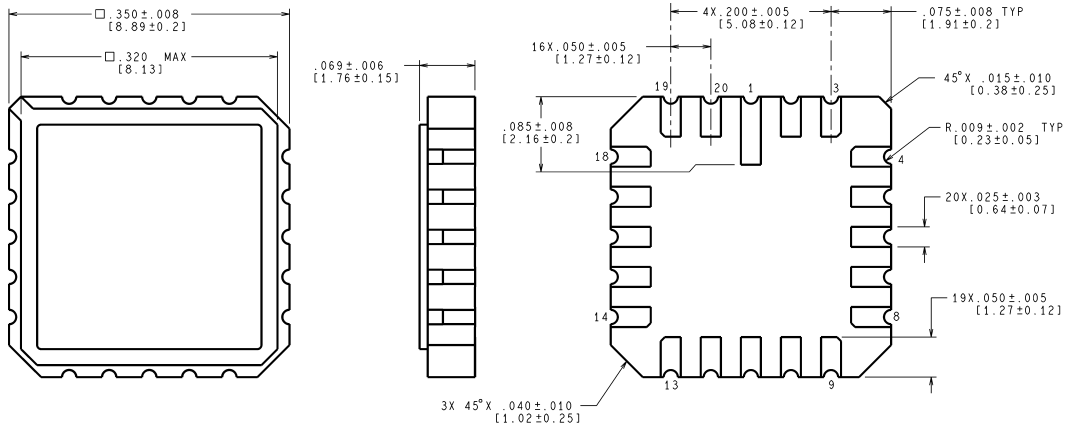

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

E20A (Rev F)

## 20-Leadless Chip Carrier (E) NS Package Number E20A

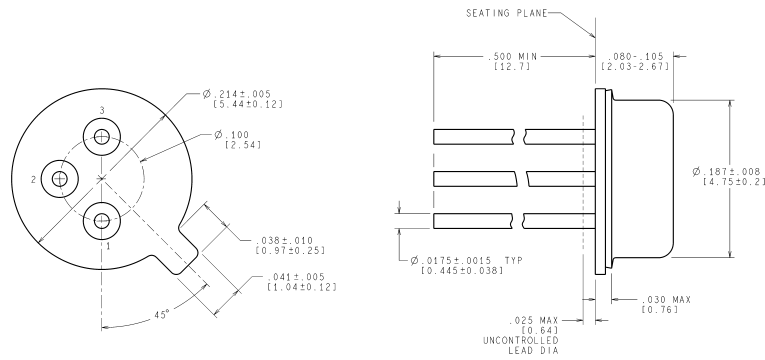

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE IN MILLIMETERS

H03H (Rev F)

## TO-46 Metal Can Package (H) NS Package Number H03H

## Notes

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at [www.national.com](http://www.national.com).

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### BANNED SUBSTANCE COMPLIANCE

National Semiconductor manufactures products and uses packing materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.

Leadfree products are RoHS compliant.



**National Semiconductor**  
Americas Customer  
Support Center  
Email: [new.feedback@nsc.com](mailto:new.feedback@nsc.com)  
Tel: 1-800-272-9959

[www.national.com](http://www.national.com)

**National Semiconductor**  
Europe Customer Support Center  
Fax: +49 (0) 180-530 85 86  
Email: [europa.support@nsc.com](mailto:europa.support@nsc.com)  
Deutsch Tel: +49 (0) 69 9508 6208  
English Tel: +44 (0) 870 24 0 2171  
Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor**  
Asia Pacific Customer  
Support Center  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor**  
Japan Customer Support Center  
Fax: 81-3-5639-7507  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)  
Tel: 81-3-5639-7560