

JZV SERIES

105°C Low Impedance, High Temperature Reflow Soldering

◆FEATURES

- Load Life : 105°C 2000 hours.
- High Temperature reflow soldering is available.
- Available for high density mounting.
- Prescribe Impedance value at 100 kHz.
- RoHS compliance.




◆SPECIFICATIONS

Items	Characteristics																													
Category Temperature Range	-55~+105℃																													
Rated Voltage Range	6.3~35Vdc																													
Capacitance Tolerance	±20% (20℃, 120Hz)																													
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)																													
(tanδ) Dissipation Factor(MAX)	<table><tr><td>Rated Voltage (Vdc)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>tanδ</td><td>0.26</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td></tr></table> (20℃, 120Hz)						Rated Voltage (Vdc)	6.3	10	16	25	35	tanδ	0.26	0.19	0.16	0.14	0.12												
Rated Voltage (Vdc)	6.3	10	16	25	35																									
tanδ	0.26	0.19	0.16	0.14	0.12																									
Endurance	After applying rated voltage with rated ripple current for 2000 hours at 105℃, the capacitors shall meet the following requirements. <table><tr><td>Capacitance Change</td><td colspan="5">Within ±30% of the initial value.</td></tr><tr><td>Dissipation Factor</td><td colspan="5">Not more than 200% of the specified value.</td></tr><tr><td>Leakage Current</td><td colspan="5">Not more than the specified value.</td></tr></table>						Capacitance Change	Within ±30% of the initial value.					Dissipation Factor	Not more than 200% of the specified value.					Leakage Current	Not more than the specified value.										
Capacitance Change	Within ±30% of the initial value.																													
Dissipation Factor	Not more than 200% of the specified value.																													
Leakage Current	Not more than the specified value.																													
Low Temperature Stability Impedance Ratio(MAX)	<table><tr><td>Rated Voltage (Vdc)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>Z(-25℃)/Z(20℃)</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(20℃)</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr><tr><td>Z(-55℃)/Z(20℃)</td><td>4</td><td>4</td><td>4</td><td>3</td><td>3</td></tr></table> (120Hz)						Rated Voltage (Vdc)	6.3	10	16	25	35	Z(-25℃)/Z(20℃)	2	2	2	2	2	Z(-40℃)/Z(20℃)	3	3	3	3	3	Z(-55℃)/Z(20℃)	4	4	4	3	3
Rated Voltage (Vdc)	6.3	10	16	25	35																									
Z(-25℃)/Z(20℃)	2	2	2	2	2																									
Z(-40℃)/Z(20℃)	3	3	3	3	3																									
Z(-55℃)/Z(20℃)	4	4	4	3	3																									

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	120	1k	10k	100k≤
4.7μF	0.30	0.60	0.80	1.00
10~47μF	0.32	0.75	0.90	1.00
100μF	0.50	0.80	0.95	1.00
220~1000μF	0.60	0.85	0.95	1.00

◆MARKING



※Voltage Code


Rated Voltage (Vdc)	6.3	10	16	25	35
Rated Voltage code	j	A	C	E	V

◆PART NUMBER

□□□	JZV	□□□□□	M	□□□	D×L
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Case Size

◆ DIMENSIONS

(mm)

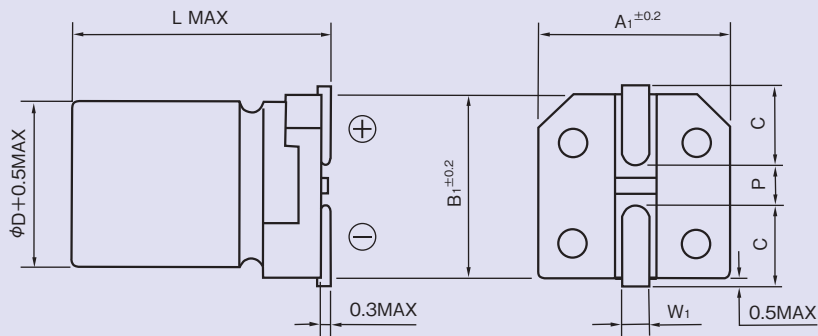

φD	L	A1	B1	C	W1	P
4	6.1	4.3	4.3	1.8	0.5~0.8	1.0
5	6.1	5.3	5.3	2.2	0.5~0.8	1.3
6.3	6.1	6.6	6.6	2.7	0.5~0.8	1.8
6.3	8	6.6	6.6	2.7	0.5~0.8	1.8
8	10.5	8.3	8.3	2.9	0.8~1.1	3.1
10	10.5	10.3	10.3	3.2	0.8~1.1	4.5

◆ STANDARD SIZE

Size φD×L(mm), Rated Ripple Current (mA r.m.s./105°C, 100kHz), Impedance(Ω MAX/20°C, 100kHz)

Vdc	Cap (μF)	Size (φD×L)	Ripple	Impedance
6.3	22	4×6.1	90	1.35
	47	4×6.1	90	1.35
		5×6.1	170	0.70
	100	5×6.1	170	0.70
		6.3×6.1	250	0.36
	220	6.3×6.1	250	0.36
		6.3×8	300	0.34
	330	6.3×8	300	0.34
10	1000	8×10.5	600	0.16
	33	4×6.1	90	1.35
	220	6.3×8	300	0.34
	470	8×10.5	600	0.16
	680	8×10.5	600	0.16
16	1000	10×10.5	850	0.08
	10	4×6.1	90	1.35
		5×6.1	170	0.70
	22	4×6.1	90	1.35
		5×6.1	170	0.70
	33	5×6.1	170	0.70
		6.3×6.1	250	0.36
	47	5×6.1	170	0.70
		6.3×6.1	250	0.36
	100	6.3×6.1	250	0.36
		6.3×8	300	0.34
	220	6.3×8	300	0.34
	330	8×10.5	600	0.16
	470	8×10.5	600	0.16
	680	10×10.5	850	0.08

Vdc	Cap (μF)	Size (φD×L)	Ripple	Impedance
25	33	5×6.1	170	0.70
		6.3×6.1	250	0.36
	47	6.3×6.1	250	0.36
	100	6.3×8	300	0.34
	220	8×10.5	600	0.16
	330	8×10.5	600	0.16
	470	10×10.5	850	0.09
	4.7	4×6.1	90	1.45
35	10	4×6.1	90	1.45
		5×6.1	170	0.70
	22	5×6.1	170	0.70
		6.3×6.1	250	0.36
	33	6.3×6.1	250	0.36
	47	6.3×6.1	250	0.36
		6.3×8	300	0.34
	100	6.3×8	300	0.34
		8×10.5	600	0.16
	220	8×10.5	600	0.16
	330	10×10.5	850	0.09