

PZC SERIES

Load Life : 125°C 3000 hours, Radial Lead Type

- High Voltage (~50Vdc), Ultra Low ESR, High Ripple Current.
- AEC-Q200.

RoHS
compliance

**◆SPECIFICATIONS**


Items	Characteristics							
Category Temperature Range	−55~+125°C							
Rated Voltage Range	25~50Vdc							
Surge Voltage	Rated Voltage ×1.15							
Capacitance Tolerance	±20%(20°C,120Hz)							
Leakage Current(MAX)	The value is shown in "STANDARD SIZE" table (After 2 minutes)							
Dissipation Factor(MAX) (tanδ)	0.12以下(20°C,120Hz)							
Endurance	After applying rated voltage for 3000 hours at 125°C, the capacitors shall meet the following requirements. <table border="1" style="margin-left: 20px;"> <tr> <td>Capacitance Change</td><td>Within ±20% of the initial value.</td></tr> <tr> <td>Dissipation Factor</td><td>Not more than 150% of the specified value.</td></tr> <tr> <td>Leakage Current</td><td>Not more than the specified value.</td></tr> </table>		Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 150% of the specified value.	Leakage Current	Not more than the specified value.
Capacitance Change	Within ±20% of the initial value.							
Dissipation Factor	Not more than 150% of the specified value.							
Leakage Current	Not more than the specified value.							
Damp heat(Stady state)	After applying rated voltage for 1000 hours at 60°C and humidity of 90 to 95%, the capacitors shall meet the following requirements. <table border="1" style="margin-left: 20px;"> <tr> <td>Capacitance Change</td><td>Within ±20% of the initial value.</td></tr> <tr> <td>Dissipation Factor</td><td>Not more than 150% of the specified value.</td></tr> <tr> <td>Leakage Current</td><td>Not more than the specified value.</td></tr> </table>		Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 150% of the specified value.	Leakage Current	Not more than the specified value.
Capacitance Change	Within ±20% of the initial value.							
Dissipation Factor	Not more than 150% of the specified value.							
Leakage Current	Not more than the specified value.							
Low Temperature Characteristics Impedance Ratio(MAX)	$Z(-55°C)/Z(+20°C) \leq 1.25$ (100kHz) $Z(-25°C)/Z(+20°C) \leq 1.15$							

◆PART NUMBER

□□□ PZC □□□□□ M □□□ Option □□ Lead Forming □□□ Case Size

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	120	1k	10k	100k≤
Coefficient	0.05	0.30	0.70	1.00

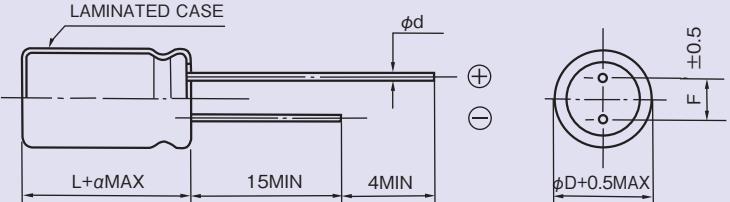
◆MARKING

※Voltage code

Rated Voltage (Vdc)	25	35	50
Voltage code	E	V	H

◆DIMENSIONS

(mm)

	<table border="1"> <thead> <tr> <th>ϕD</th><th colspan="2">8</th><th colspan="2">10</th></tr> </thead> <tbody> <tr> <td>L</td><td>10</td><td>12.5</td><td>10</td><td>13</td></tr> <tr> <td>F</td><td colspan="2">3.5</td><td colspan="2" rowspan="3">5.0</td></tr> <tr> <td>ϕd</td><td colspan="4">0.6</td></tr> <tr> <td>a</td><td colspan="4">2.0</td></tr> </tbody> </table>	ϕD	8		10		L	10	12.5	10	13	F	3.5		5.0		ϕd	0.6				a	2.0			
ϕD	8		10																							
L	10	12.5	10	13																						
F	3.5		5.0																							
ϕd	0.6																									
a	2.0																									

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi D \times L$ (mm)	$(\tan\delta)$ (120Hz, 20°C)	Leakage Current ($\mu A/2min$)	E.S.R.(mΩ,max)		Rated Ripple Current (mA r.m.s./100kHz)
					20°C, 100kHz	-40°C, 10kHz	
25	68	8×10	0.12	340	35	53	1600
	82	8×12.5	0.12	410	32	48	2000
	100	10×10	0.12	500	30	45	2000
	150	10×13	0.12	750	29	44	2300
35	33	8×10	0.12	231	37	56	1600
	39	8×12.5	0.12	273	35	53	2000
	56	10×10	0.12	392	31	47	2000
	68	10×13	0.12	476	30	45	2300
50	22	8×10	0.12	220	38	57	1250
	27	8×12.5	0.12	270	36	54	1500
	33	10×10	0.12	330	33	50	1600
	47	10×13	0.12	470	31	47	2000