

SZV SERIES
105°C Low Impedance, Lead Free Reflow Soldering.
◆FEATURES

- Load Life : 105°C 1000 hours.
- Lead free reflow soldering is available.
- Available for high density mounting.
- Low impedance at 100kHz with selected materials.
- RoHS compliance.



◆SPECIFICATIONS

Items	Characteristics																							
Category Temperature Range	-55~+105℃																							
Rated Voltage Range	6.3~35V.DC																							
Capacitance Tolerance	±20%（20℃，120Hz）																							
Leakage Current(MAX)	I=0.01CV or 3 μ A whichever is greater.（After 2 minutes application of rated voltage） I=Leakage Current(μ A) C=Rated Capacitance(μ F) V=Rated Voltage(V)																							
Dissipation Factor(MAX) (tan δ)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>tan δ</td><td>0.26</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td></tr></table> （20℃，120Hz）						Rated Voltage (V)	6.3	10	16	25	35	tan δ	0.26	0.19	0.16	0.14	0.12						
Rated Voltage (V)	6.3	10	16	25	35																			
tan δ	0.26	0.19	0.16	0.14	0.12																			
Endurance	After applying rated voltage with rated ripple current for 1000 hrs at 105℃, the capacitors shall meet the following requirements. <table><tr><td>Capacitance Change</td><td colspan="5">Within ±25% of the initial value.</td></tr><tr><td>Dissipation Factor</td><td colspan="5">Not more than 200% of the specified value.</td></tr><tr><td>Leakage Current</td><td colspan="5">Not more than the specified value.</td></tr></table>						Capacitance Change	Within ±25% of the initial value.					Dissipation Factor	Not more than 200% of the specified value.					Leakage Current	Not more than the specified value.				
Capacitance Change	Within ±25% of the initial value.																							
Dissipation Factor	Not more than 200% of the specified value.																							
Leakage Current	Not more than the specified value.																							
Low Temperature Stability Impedance Ratio(MAX)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>Z（-25℃）/Z（20℃）</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z（-55℃）/Z（20℃）</td><td>5</td><td>4</td><td>4</td><td>3</td><td>3</td></tr></table> （120Hz）						Rated Voltage (V)	6.3	10	16	25	35	Z（-25℃）/Z（20℃）	2	2	2	2	2	Z（-55℃）/Z（20℃）	5	4	4	3	3
Rated Voltage (V)	6.3	10	16	25	35																			
Z（-25℃）/Z（20℃）	2	2	2	2	2																			
Z（-55℃）/Z（20℃）	5	4	4	3	3																			

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency (Hz)	120	1k	10k	100k≤
1 μF	0.30	0.60	0.80	1.00
2.2~4.7 μF	0.42	0.60	0.80	1.00
10~33 μF	0.55	0.75	0.90	1.00
47~100 μF	0.70	0.85	0.95	1.00

◆MARKING


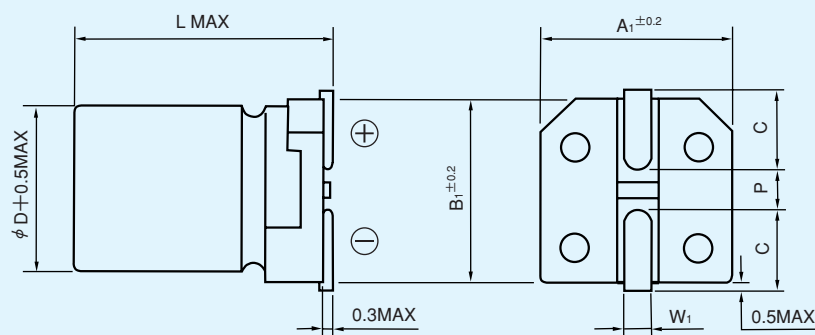
Rated Voltage (V)	6.3	10	16	25	35
Rated Voltage code	j	A	C	E	V

◆PART NUMBER

Rated Voltage	SZV Series	Rated Capacitance	Capacitance Tolerance	Option	D×L Case Size

◆ DIMENSIONS

(mm)



ϕ D	L	A ₁	B ₁	C	W ₁	P
4	5.5	4.3	4.3	1.8	0.5~0.8	1.0
5	5.5	5.3	5.3	2.2	0.5~0.8	1.3
6.3	5.5	6.6	6.6	2.7	0.5~0.8	1.8

◆ **STANDARD SIZE**

Size ϕ D(mm), Ripple Current (mA r.m.s./105°C, 100kHz), Impedance(Ω MAX/20°C, 100kHz)[illegible]