

ULW SERIES

85°C Long Life (8000 hours)

RoHS
compliance

◆SPECIFICATIONS

Items	Characteristics		
Category Temperature Range	-25~+85°C		
Rated Voltage Range	450~500Vdc		
Capacitance Tolerance	±20%(20°C,120Hz)		
Leakage Current(MAX)	$I=3 \sqrt{CV}$ (After 5 minutes application of rated voltage) I =Leakage Current(μ A) C =Capacitance(μ F) V =Rated Voltage(Vdc)		
Dissipation Factor(MAX) ($\tan\delta$)	Rated Voltage(Vdc)	450	500
	$\tan\delta$	0.20	0.24
(20°C,120Hz)			
Endurance	After applying rated voltage with rated ripple current for 8000 hours at 85°C, the capacitors shall meet the following requirements.		
	Capacitance Change	Within ±20% of the initial value.	
	Dissipation Factor	Not more than 200% of the specified value.	
	Leakage Current	Not more than the specified value.	
Low Temperature Stability Impedance Ratio(MAX)	Rated Voltage(Vdc)	450~500	
	$Z(-25^\circ\text{C})/Z(20^\circ\text{C})$	8	
	(120Hz)		

◆MULTIPLIER FOR RIPPLE CURRENT

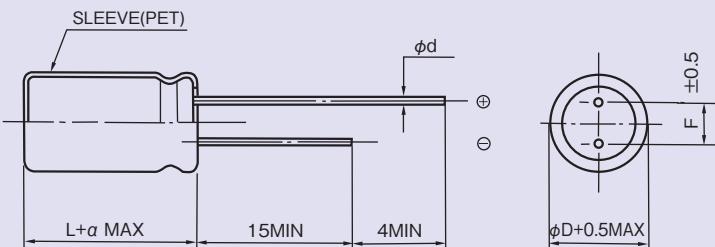
Frequency (Hz)	60(50)	120	500	1k	10k	50k≤
Coefficient	0.80	1.00	1.25	1.40	1.50	2.00

◆PART NUMBER

□□□ ULW
 Rated Voltage Series □□□ Capacitance M □□□ Option □□ Lead Forming D×L Case Size

◆DIMENSIONS

(mm)

	<table border="1" data-bbox="1159 325 1437 516"> <tr> <td>ϕD</td><td>16</td><td>18</td></tr> <tr> <td>ϕd</td><td colspan="2">0.8</td></tr> <tr> <td>F</td><td colspan="2">7.5</td></tr> <tr> <td>a</td><td colspan="2">2.0</td></tr> </table>	ϕD	16	18	ϕd	0.8		F	7.5		a	2.0	
ϕD	16	18											
ϕd	0.8												
F	7.5												
a	2.0												

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi D \times L$ (mm)	Rated Ripple Current (A r.m.s./85°C,120Hz)
450	68	16×30	0.55
	68	18×30	0.56
	82	16×35	0.63
	82	18×31.5	0.63
	100	16×45	0.80
	100	18×35	0.72
	120	16×50	0.86
	120	18×40	0.84
	150	16×50	0.92
500	47	16×30	0.37
	56	16×35	0.42
	68	16×40	0.49
	82	16×45	0.56
	100	16×50	0.70