


ZL SERIES

105°C High ripple current, Low impedance.

◆FEATURES

- Enabled high ripple current by a reduction of impedance at high frequency range.
- Load Life : 105°C 1000~5000hours.

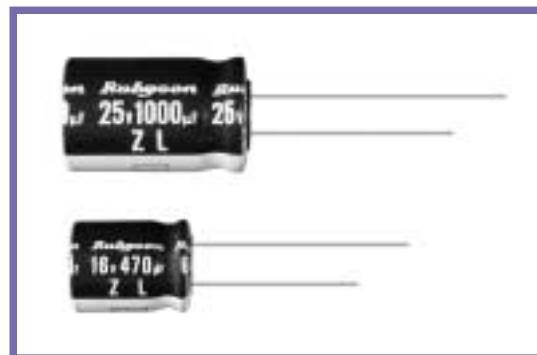

◆SPECIFICATIONS

Items	Characteristics																																										
Category Temperature Range	-40~+105℃																																										
Rated Voltage Range	6.3~100V.DC																																										
Capacitance Tolerance	±20% (20℃, 120Hz)																																										
Leakage Current(MAX)	I=0.01CV or 3 μ A whichever is greater. (After 2 minutes) I=Leakage Current(μ A) C=Rated Capacitance(μ F) V=Rated Voltage(V)																																										
Dissipation Factor(MAX)	<table><tr><td>Rated Voltage(V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>tan δ</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td><td>0.08</td></tr></table> (20℃, 120Hz) When rated capacitance is over 1000 μ F, tan δ shall be added 0.02 to the listed value with increase of every 1000 μ F.										Rated Voltage(V)	6.3	10	16	25	35	50	63	100	tan δ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08															
Rated Voltage(V)	6.3	10	16	25	35	50	63	100																																			
tan δ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																																			
Endurance	After life test with rated ripple current at conditions stated in the table below, the capacitors shall meet the following requirements. <table><tr><td colspan="2">Capacitance Change</td><td colspan="2">Within ±25% of the initial value.</td></tr><tr><td colspan="2">Dissipation Factor</td><td colspan="2">Not more than 200% of the specified value.</td></tr><tr><td colspan="2">Leakage Current</td><td colspan="2">Not more than the specified value.</td></tr></table> <table><tr><td colspan="2">Case size</td><td colspan="2">Life Time</td></tr><tr><td colspan="2">L =7</td><td colspan="2">1000</td></tr><tr><td rowspan="4">L≥11</td><td>φ D≤6.3</td><td colspan="2">2000</td></tr><tr><td>φ D= 8</td><td colspan="2">3000</td></tr><tr><td>φ D= 10</td><td colspan="2">4000</td></tr><tr><td>φ D≥12.5</td><td colspan="2">5000</td></tr></table>										Capacitance Change		Within ±25% of the initial value.		Dissipation Factor		Not more than 200% of the specified value.		Leakage Current		Not more than the specified value.		Case size		Life Time		L =7		1000		L≥11	φ D≤6.3	2000		φ D= 8	3000		φ D= 10	4000		φ D≥12.5	5000	
Capacitance Change		Within ±25% of the initial value.																																									
Dissipation Factor		Not more than 200% of the specified value.																																									
Leakage Current		Not more than the specified value.																																									
Case size		Life Time																																									
L =7		1000																																									
L≥11	φ D≤6.3	2000																																									
	φ D= 8	3000																																									
	φ D= 10	4000																																									
	φ D≥12.5	5000																																									
Low Temperature Stability Impedance Ratio(MAX)	<table><tr><td>Rated Voltage(V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>Z(-25℃)/Z(20℃)</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(20℃)</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table> (120Hz)										Rated Voltage(V)	6.3	10	16	25	35	50	63	100	Z(-25℃)/Z(20℃)	2	2	2	2	2	2	2	2	Z(-40℃)/Z(20℃)	3	3	3	3	3	3	3	3						
Rated Voltage(V)	6.3	10	16	25	35	50	63	100																																			
Z(-25℃)/Z(20℃)	2	2	2	2	2	2	2	2																																			
Z(-40℃)/Z(20℃)	3	3	3	3	3	3	3	3																																			

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient


Frequency (Hz)		120	1k	10k	100k≤
Coefficient	5.6~33 μF	0.42	0.70	0.90	1.00
	39~270 μF	0.50	0.73	0.92	1.00
	330~680 μF	0.55	0.77	0.94	1.00
	820~1800 μF	0.60	0.80	0.96	1.00
	2200~6800 μF	0.70	0.85	0.98	1.00

◆PART NUMBER

 ZL D×L
 Rated Voltage Series Rated Capacitance Capacitance Tolerance Option Lead Forming Case Size

◆ DIMENSIONS

(mm)

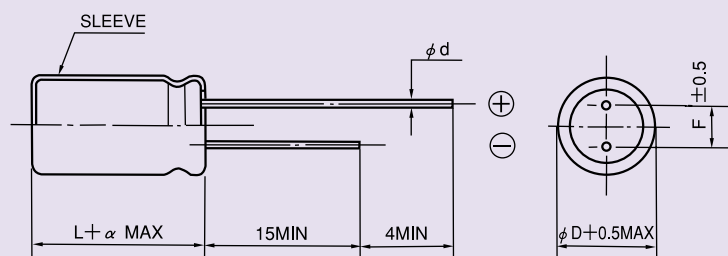
 $\langle L = 7 \rangle$

ϕD	4	5	6.3	8
ϕd	0.45			
F	1.5	2.0	2.5	3.5
α	1.0			

 $\langle L \geq 11 \rangle$

ϕ D	5	6.3	8	10	12.5	16	18
ϕ d	0.5		0.6			0.8	
F	2.0	2.5	3.5	5.0		7.5	
α	$L \leq 16 : \alpha = 1.5 \quad L \geq 20 : \alpha = 2.0$						

◆ STANDARD SIZE

Rated voltage 6.3V(0J)				
Rated capacitance (μF)	Size $\phi D \times L$ (mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance(Ω MAX)	
			20°C, 100kHz	-10°C, 100kHz
39	4×7	130	0.85	2.6
68	5×7	210	0.43	1.3
150	6.3×7	300	0.23	0.69
150	5×11	250	0.30	1.0
220	8×7	380	0.15	0.45
330	6.3×11	405	0.13	0.41
560	8×11.5	760	0.072	0.22
820	8×16	995	0.056	0.17
1000	10×12.5	1030	0.053	0.16
1200	8×20	1250	0.041	0.13
1200	10×16	1430	0.038	0.12
1500	10×20	1820	0.023	0.069
2200	10×23	2150	0.022	0.066
3300	12.5×20	2360	0.021	0.053
3900	12.5×25	2770	0.018	0.045
4700	12.5×30	3290	0.016	0.041
5600	12.5×35	3400	0.015	0.039
5600	16×20	3140	0.018	0.045
6800	16×25	3460	0.016	0.043

Rated voltage 10V(1A)				
Rated capacitance (μ F)	Size ϕ D×L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance(Ω MAX)	
			20°C, 100kHz	−10°C, 100kHz
27	4×7	130	0.89	2.7
56	5×7	210	0.44	1.4
100	5×11	250	0.30	1.0
120	6.3×7	300	0.23	0.69
180	8×7	380	0.15	0.45
220	6.3×11	405	0.13	0.41
470	8×11.5	760	0.072	0.22
680	8×16	995	0.056	0.17
680	10×12.5	1030	0.053	0.16
1000	8×20	1250	0.041	0.13
1000	10×16	1430	0.038	0.12
1200	10×20	1820	0.023	0.069
1500	10×23	2150	0.022	0.066
2200	12.5×20	2360	0.021	0.053
3300	12.5×25	2770	0.018	0.045
3900	12.5×30	3290	0.016	0.041
3900	16×20	3140	0.018	0.045
4700	12.5×35	3400	0.015	0.039
5600	16×25	3460	0.016	0.043

Rated voltage 16V(1C)				
Rated capacitance (μ F)	Size ϕ D×L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance(Ω MAX)	
			20°C, 100kHz	−10°C, 100kHz
18	4×7	130	0.92	2.8
33	5×7	210	0.45	1.4
56	5×11	250	0.30	1.0
68	6.3×7	300	0.24	0.72
120	8×7	380	0.15	0.45
120	6.3×11	405	0.13	0.41
330	8×11.5	760	0.072	0.22
470	8×16	995	0.056	0.17
470	10×12.5	1030	0.053	0.16
680	8×20	1250	0.041	0.13
680	10×16	1430	0.038	0.12
1000	10×20	1820	0.023	0.069
1200	10×23	2150	0.022	0.066
1500	12.5×20	2360	0.021	0.053
2200	12.5×25	2770	0.018	0.045
2700	12.5×30	3290	0.016	0.041
2700	16×20	3140	0.018	0.045
3300	12.5×35	3400	0.015	0.039
3900	16×25	3460	0.016	0.043

Rated voltage 25V(1E)				
Rated capacitance (μ F)	Size ϕ D $\times$ L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance(Ω MAX)	
			20°C, 100kHz	−10°C, 100kHz
15	4 $\times$ 7	130	0.94	2.9
27	5 $\times$ 7	210	0.46	1.4
47	5 $\times$ 11	250	0.30	1.0
56	6.3 $\times$ 7	300	0.24	0.72
100	8 $\times$ 7	380	0.15	0.45
100	6.3 $\times$ 11	405	0.13	0.41
220	8 $\times$ 11.5	760	0.072	0.22
330	8 $\times$ 16	995	0.056	0.17
330	10 $\times$ 12.5	1030	0.053	0.16
470	8 $\times$ 20	1250	0.041	0.13
470	10 $\times$ 16	1430	0.038	0.12
680	10 $\times$ 20	1820	0.023	0.069
820	10 $\times$ 23	2150	0.022	0.066
1000	12.5 $\times$ 20	2360	0.021	0.053
1500	12.5 $\times$ 25	2770	0.018	0.045
1800	12.5 $\times$ 30	3290	0.016	0.041
1800	16 $\times$ 20	3140	0.018	0.045
2200	12.5 $\times$ 35	3400	0.015	0.039
2700	16 $\times$ 25	3460	0.016	0.043

Rated voltage 35V(1V)				
Rated capacitance (μ F)	Size ϕ D $\times$ L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance(Ω MAX)	
			20°C, 100kHz	−10°C, 100kHz
10	4 $\times$ 7	130	0.96	2.9
18	5 $\times$ 7	210	0.47	1.5
33	5 $\times$ 11	250	0.30	1.0
39	6.3 $\times$ 7	300	0.25	0.75
56	8 $\times$ 7	380	0.16	0.48
56	6.3 $\times$ 11	405	0.13	0.41
150	8 $\times$ 11.5	760	0.072	0.22
220	8 $\times$ 16	995	0.056	0.17
220	10 $\times$ 12.5	1030	0.053	0.16
270	8 $\times$ 20	1250	0.041	0.13
330	10 $\times$ 16	1430	0.038	0.12
470	10 $\times$ 20	1820	0.023	0.069
560	10 $\times$ 23	2150	0.022	0.066
680	12.5 $\times$ 20	2360	0.021	0.053
1000	12.5 $\times$ 25	2770	0.018	0.045
1200	12.5 $\times$ 30	3290	0.016	0.041
1200	16 $\times$ 20	3140	0.018	0.045
1500	12.5 $\times$ 35	3400	0.015	0.039
1800	16 $\times$ 25	3460	0.016	0.043

Rated voltage 50V(1H)				
Rated capacitance (μ F)	Size ϕ D×L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance(Ω MAX)	
			20°C, 100kHz	−10°C, 100kHz
5.6	4×7	130	1.0	3.0
10	5×7	210	0.50	1.5
22	6.3×7	300	0.26	0.78
22	5×11	238	0.34	1.18
33	8×7	380	0.17	0.51
56	6.3×11	385	0.14	0.50
100	8×11.5	724	0.074	0.22
120	8×16	950	0.061	0.18
150	10×12.5	979	0.061	0.18
180	8×20	1190	0.046	0.14
220	10×16	1370	0.042	0.12
270	10×20	1580	0.030	0.090
330	10×23	1870	0.028	0.085
470	12.5×20	2050	0.027	0.068
560	12.5×25	2410	0.023	0.059
680	12.5×30	2860	0.021	0.052
820	12.5×35	2960	0.019	0.051
820	16×20	2730	0.023	0.059
1000	16×25	3010	0.021	0.056

Rated voltage 63V(1J)				
Rated capacitance (μ F)	Size ϕ D×L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance(Ω MAX)	
			20°C, 100kHz	−10°C, 100kHz
15	5×11	165	0.88	3.5
33	6.3×11	265	0.35	1.4
56	8×11.5	500	0.22	0.88
82	8×16	665	0.16	0.64
82	10×12.5	685	0.15	0.60
120	8×20	820	0.12	0.48
120	10×16	945	0.11	0.44
180	10×20	1100	0.080	0.32
180	12.5×16	1135	0.082	0.27
220	10×23	1300	0.073	0.29
270	12.5×20	1495	0.060	0.20
330	12.5×25	1850	0.043	0.14
470	12.5×30	2250	0.039	0.13
470	16×20	1990	0.045	0.14
560	12.5×35	2450	0.033	0.11
560	16×25	2550	0.032	0.096
680	12.5×40	2780	0.029	0.096
680	18×20	2450	0.038	0.10
820	16×31.5	2810	0.026	0.078
820	18×25	2780	0.031	0.084
1000	16×35.5	2835	0.021	0.063
1000	18×31.5	3270	0.025	0.068
1200	16×40	3340	0.019	0.057
1200	18×35.5	3310	0.020	0.054
1500	18×40	3420	0.018	0.049




MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS ZL

Rated voltage 100V(2A)				
Rated capacitance (μ F)	Size ϕ D $\times$ L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance(Ω MAX)	
			20°C, 100kHz	-10°C, 100kHz
6.8	5 $\times$ 11	125	1.40	5.6
15	6.3 $\times$ 11	205	0.57	2.3
27	8 $\times$ 11.5	355	0.36	1.4
39	8 $\times$ 16	450	0.25	1.0
47	10 $\times$ 12.5	450	0.24	0.96
56	8 $\times$ 20	565	0.19	0.76
68	10 $\times$ 16	580	0.18	0.72
82	10 $\times$ 20	750	0.13	0.52
82	12.5 $\times$ 16	735	0.13	0.43
100	10 $\times$ 23	880	0.12	0.48
120	12.5 $\times$ 20	1045	0.094	0.31
180	12.5 $\times$ 25	1195	0.071	0.23
220	12.5 $\times$ 30	1410	0.063	0.21
220	16 $\times$ 20	1295	0.071	0.21
270	12.5 $\times$ 35	1560	0.052	0.17
270	16 $\times$ 25	1600	0.053	0.16
270	18 $\times$ 20	1470	0.069	0.19
330	12.5 $\times$ 40	1700	0.046	0.15
390	16 $\times$ 31.5	1750	0.041	0.12
390	18 $\times$ 25	1620	0.049	0.13
470	16 $\times$ 35.5	1890	0.033	0.10
470	18 $\times$ 31.5	1775	0.039	0.11
560	16 $\times$ 40	2080	0.030	0.090
560	18 $\times$ 35.5	2060	0.031	0.084
680	18 $\times$ 40	2570	0.028	0.076


◆ CHARACTERISTIC DATA

———— 35 ZL 150M 8×11.5
 - - - - - 25 ZL 1000M 12.5×20

▪ TEMPERATURE CHARACTERISTICS

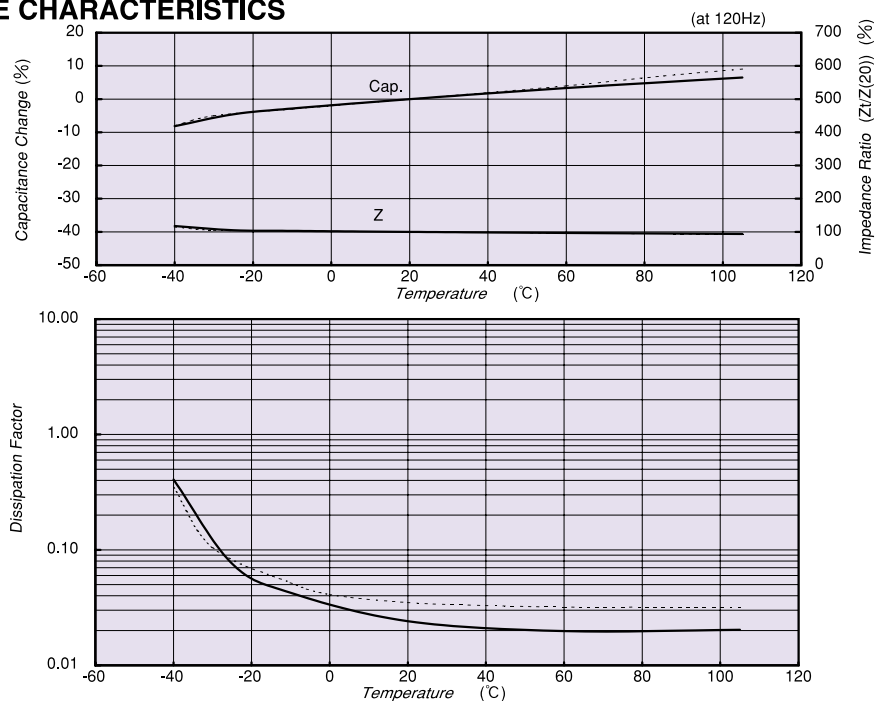

▪ FREQUENCY CHARACTERISTICS

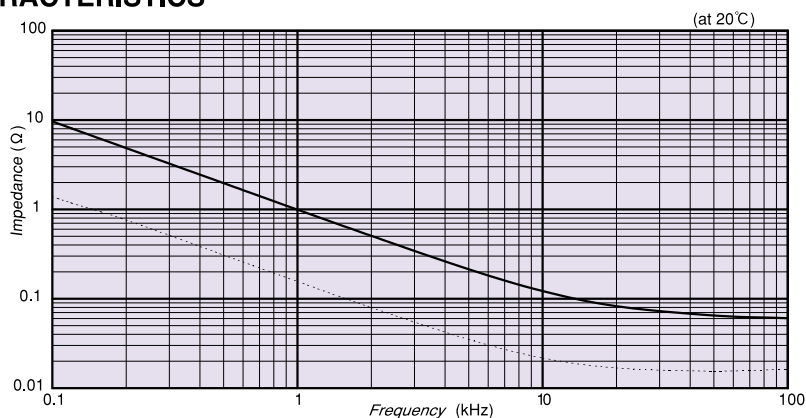

▪ ENDURANCE

