

1SS344


Ultra High Speed Switching Application

Unit: mm

- Low forward voltage : $V_F(3) = 0.50V$ (typ.)
- Fast reverse recovery time : $t_{rr} = 20ns$ (typ.)
- High average forward current : $I_O = 0.5A$ (max)

Maximum Ratings (Ta = 25°C)

Characteristic	Symbol	Rating	Unit
Maximum (peak) reverse voltage	V_{RM}	25	V
Reverse voltage	V_R	20	V
Maximum (peak) forward current	I_{FM}	1500	mA
Average forward current	I_O	500	mA
Surge current (10ms)	I_{FSM}	5	A
Power dissipation	P	200	mW
Junction temperature	T_j	125	°C
Storage temperature	T_{stg}	-55~125	°C
Operating Temperature	T_{opr}	-40~100	°C

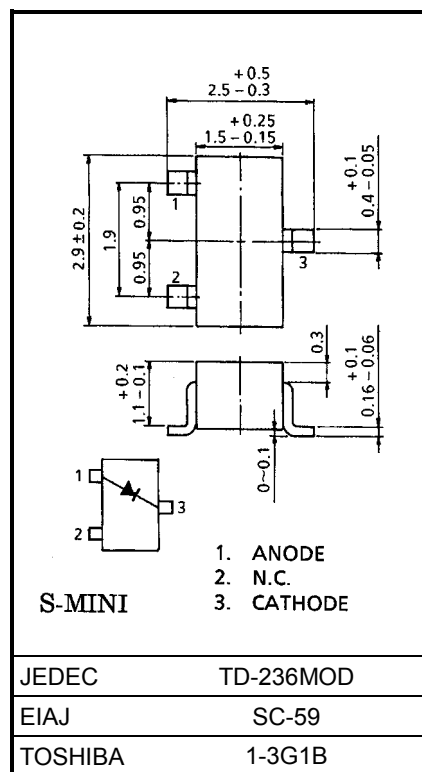

Electrical Characteristics (Ta = 25°C)

Weight: 0.012g

Characteristic	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Forward voltage	V_F (1)	—	$I_F = 10\text{mA}$	—	0.30	—	V
	V_F (2)	—	$I_F = 100\text{mA}$	—	0.38	—	
	V_F (3)	—	$I_F = 500\text{mA}$	—	0.50	0.55	
Reverse current	I_R (1)	—	$V_R = 10\text{V}$	—	—	20	μA
	I_R (2)	—	$V_R = 20\text{V}$	—	—	100	
Total capacitance	C_T	—	$V_R = 0, f = 1\text{MHz}$	—	120	—	pF
Reverse recovery time	t_{rr}	—	$I_F = 50\text{mA}, (\text{Fig.1})$	—	20	—	ns