

Features

- Operating voltage: 2.7V~5.5V
- Low power consumption
 - Operation: 25mA max. ($V_{CC}=5V$)
10mA max. ($V_{CC}=3V$)
 - Standby: 30 μ A max. ($V_{CC}=5V$)
10 μ A max. ($V_{CC}=3V$)
- Access time: 120ns max. ($V_{CC}=5V$)
250ns max. ($V_{CC}=3V$)
- 524288×8-bit of mask ROM
- Mask option: chip enable $\overline{CE}/\overline{CE}/OE1/\overline{OE1}$, and output enable $\overline{OE}/\overline{OE}/NC$
- TTL compatible inputs and outputs
- Tristate outputs
- Fully static operation
- 32-pin DIP/SOP package


General Description

The HT23C040 is a read-only memory with high performance CMOS storage device whose 4096K of memory is arranged into 524288 word by 8 bits.


For application flexibility, the chip enable and output enable control pins can be selected as active high or active low. This flexibility not only allows easy interface with most microprocessors, but also eliminates bus contention in mul-

tiple bus microprocessor systems. An additional feature of the HT23C040 is its ability to enter the standby mode whenever the chip enable ($\overline{CE}/\overline{CE}$) is inactive, thus reducing current consumption to below 30 μ A. The combination of these functions makes the chip suitable for high density low power memory applications.

Block Diagram

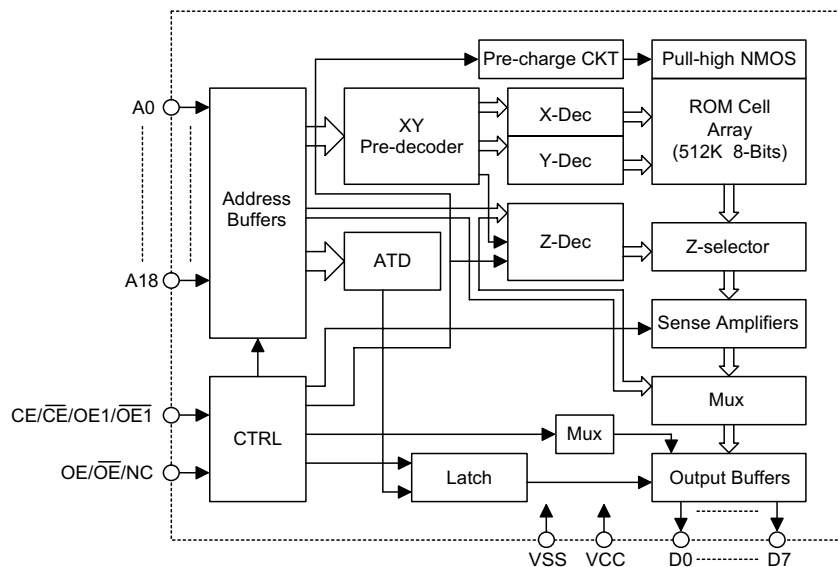

Pin Assignment

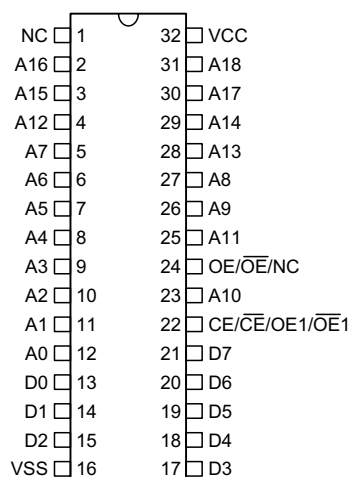

HT23C040
– 32 DIP/SOP

Pin Description

Pin Name	I/O	Description
NC	—	No connection
A0~A18	I	Address inputs
D0~D7	O	Data outputs
VSS	—	Negative power supply
CE/ $\overline{\text{CE}}$ /OE1/ $\overline{\text{OE}}$ 1	I	Chip enable/Output enable input
OE/ $\overline{\text{OE}}$ /NC	I	Output enable input
VCC	—	Positive power supply

Operation Truth Table

Mode	CE/ $\overline{\text{CE}}$	OE/ $\overline{\text{OE}}$	A0~A18	D0~D7
Read	H/L	H/L	Valid	Data Out
Deselect	H/L	L/H	X	High Z
Standby	L/H	X	X	High Z

Note: H= V_{IH} , L= V_{IL} , X= V_{IH} or V_{IL}

Absolute Maximum Ratings

Supply Voltage.....-0.3V to 6V Storage Temperature-50°C to 125°C
Input Voltage-0.3V to $V_{CC}+0.3V$ Operating Temperature-40°C to 85°C

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

D.C. Characteristics

Supply voltage: 4.5V~5.5V

$T_a = -40^{\circ}\text{C}$ to 85°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V_{CC}	Conditions				
V_{CC}	Operating Voltage	—	—	4.5	—	5.5	V
I_{CC1}	Operating Current	5V	O/P Unload, $f=5\text{MHz}$	—	—	25	mA
V_{IL1}	Input Low Voltage	5V	—	V_{SS}	—	0.8	V
V_{IH1}	Input High Voltage	5V	—	2.2	—	V_{CC}	V
V_{OL1}	Output Low Voltage	5V	$I_{OL}=3.2\text{mA}$	—	—	0.4	V
V_{OH1}	Output High Voltage	5V	$I_{OH}=-1\text{mA}$	2.4	—	V_{CC}	V
I_{LI}	Input Leakage Current	5V	$V_{IN}=0$ to V_{CC}	—	—	10	μA
I_{LO}	Output Leakage Current	5V	$V_{OUT}=0$ to V_{CC}	—	—	10	μA
I_{STB1}	Standby Current	5V	$\overline{CE}=V_{IL}$ $CE=V_{IH}$	—	—	1.5	mA
I_{STB2}	Standby Current	5V	$\overline{CE}\leq 0.2\text{V}$ $CE\geq V_{CC}-0.2\text{V}$	—	—	30	μA
C_{IN}	Input Capacitance (See note)	—	$f=1\text{MHz}$	—	—	10	pF
C_{OUT}	Output Capacitance (See note)	—	$f=1\text{MHz}$	—	—	10	pF

Supply voltage: 2.7V~3.3V
 $T_a = -40^{\circ}\text{C}$ to 85°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V _{CC}	Conditions				
V _{CC}	Operating Voltage	—	—	2.7	—	3.3	V
I _{CC2}	Operating Current	3V	O/P Unload, f=5MHz	—	—	10	mA
V _{IL2}	Input Low Voltage	3V	—	V _{SS}	—	0.4	V
V _{IH2}	Input High Voltage	3V	—	1.5	—	V _{CC}	V
V _{OL2}	Output Low Voltage	3V	I _{OL} =2mA	—	—	0.4	V
V _{OH2}	Output High Voltage	3V	I _{OH} =-0.6mA	1.5	—	V _{CC}	V
I _{LI}	Input Leakage Current	3V	V _{IN} =0 to V _{CC}	—	—	10	μA
I _{LO}	Output Leakage Current	3V	V _{OUT} =0 to V _{CC}	—	—	10	μA
C _{IN}	Input Capacitance (See Note)	—	f=1MHz	—	—	10	pF
C _{OUT}	Output Capacitance (See Note)	—	f=1MHz	—	—	10	pF

Note: These parameters are periodically sampled but not 100% tested.

A.C. Characteristics

 $T_a = -40^{\circ}\text{C}$ to 85°C

Symbol	Parameter	3V±10%		5V±10%		Unit
		Min.	Max.	Min.	Max.	
t _{CYC}	Cycle Time	200	—	120	—	ns
t _{AA}	Address Access Time	—	250	—	120	ns
t _{ACE}	Chip Enable Access Time	—	250	—	120	ns
t _{AOE}	Output Enable Access Time	—	150	—	80	ns
t _{OH}	Output Hold Time	—	—	10	—	ns
t _{OD}	Output Disable Time (See Note)	—	—	—	70	ns
t _{OE}	Output Enable Time (See Note)	—	—	10	—	ns

Note: These parameters are periodically sampled but not 100% tested.

A.C. test condition

Output load: see figure right


Input rise and fall time: 10ns

Input pulse levels: 0.4V to 2.4V

Input and output timing reference levels:

0.8V and 2.0V ($V_{CC}=5V$)

1.5V ($V_{CC}=3V$)




* Including scope and jig


Output load circuit

Timing Diagrams







- Propagation delay due to address ($\overline{CE}/\overline{CE}/\overline{OE1}/\overline{OE1}$ and $\overline{OE}/\overline{OE}$ are active)




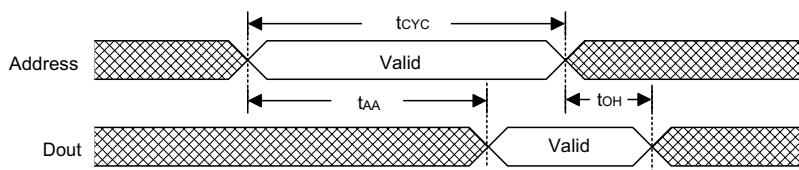


- Propagation delay due to chip and output enable (address valid)

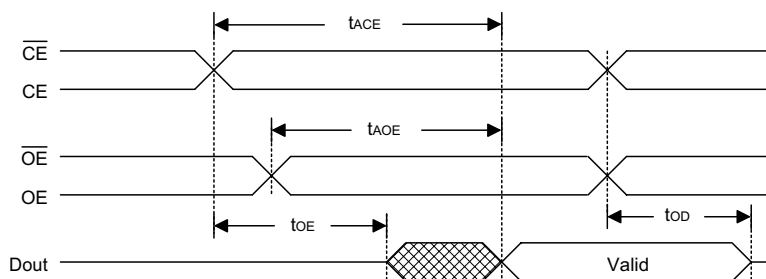

Characteristic Curves

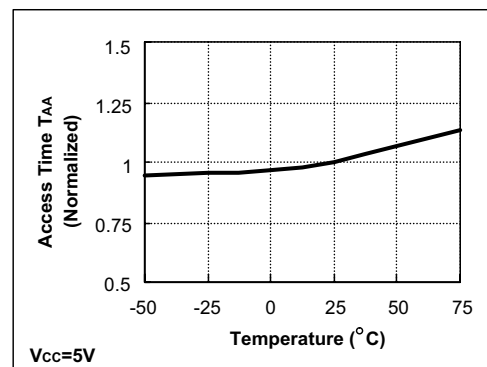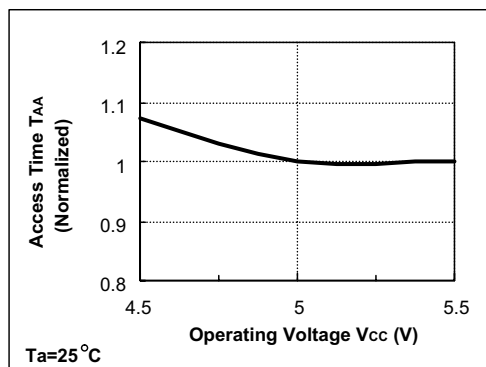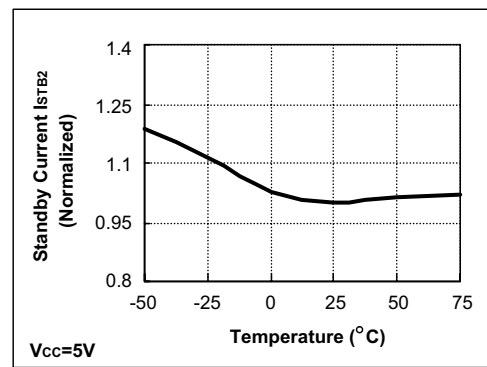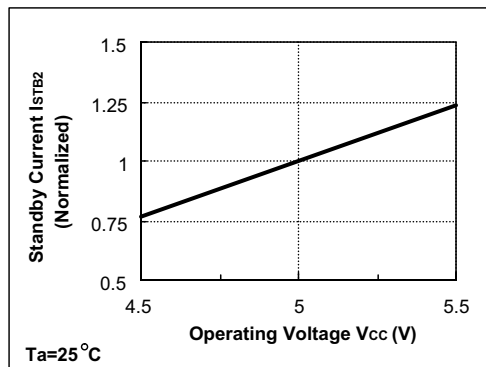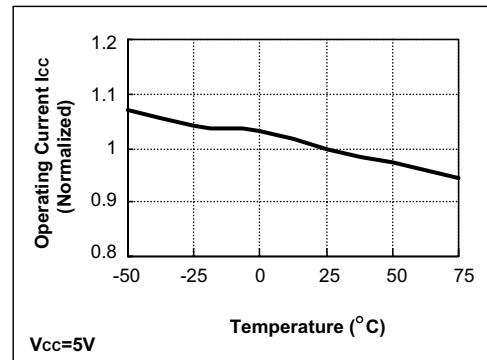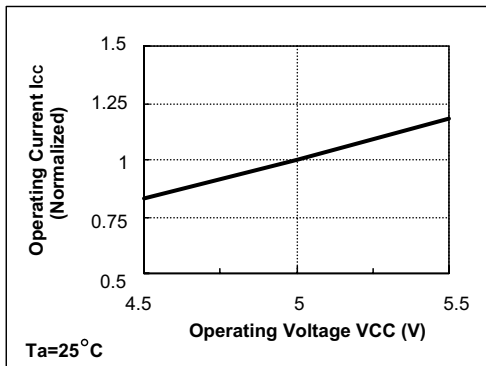

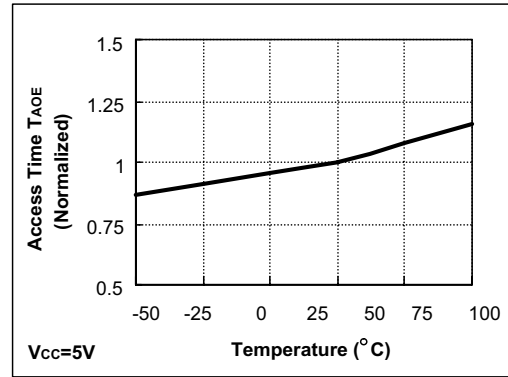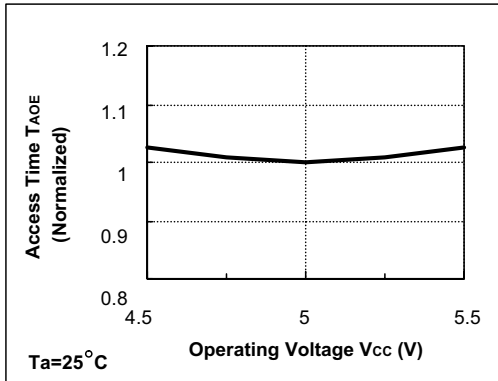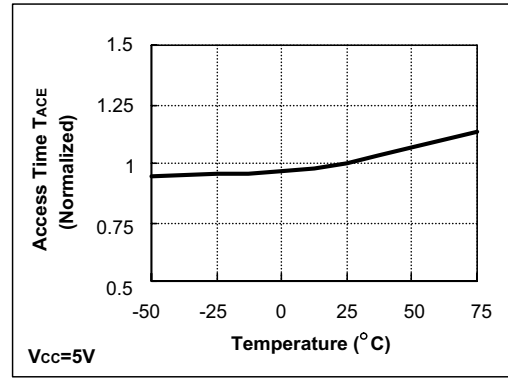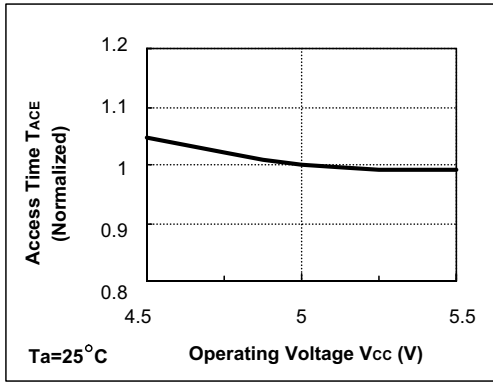

HT23C040 MASK ROM ORDERING SHEET

Custom: _____

Input Medium:

☐ EPROM ☐ DISK ☐ File (Mail Address: romfile@holtek.com.tw) ☐ OTHER _____

User No.	Type/Ref. Name	Q'ty	Check Sum	Memory Address	
				Start	End

Control Pin and Package Form Option:

(a) 32 Pin Type Pin 22: _____ (1) CE (2) $\overline{CE}$ (3) OE1 (4) $\overline{OE1}$

Pin 24: _____ (1) OE (2) $\overline{OE}$ (3) NC

(b) Package Form: _____ (1) Chip Form (2) 32 DIP (3) 32 SOP

Companion User No. _____

Package Marking : _____

Delivery Date : _____ Q'ty: _____

CUSTOM CONFIRMED BY:

(NAME, DATE, POSITION & CO. CHOP)

HOLTEK CONFIRMED BY:

(SALES)

(SALES MANAGER)

Holtek Semiconductor Inc. (Headquarters)

No.3, Creation Rd. II, Science-based Industrial Park, Hsinchu, Taiwan
Tel: 886-3-563-1999
Fax: 886-3-563-1189

Holtek Semiconductor Inc. (Sales Office)

11F, No.576, Sec.7 Chung Hsiao E. Rd., Taipei, Taiwan
Tel: 886-2-2782-9635
Fax: 886-2-2782-9636
Fax: 886-2-2782-7128 (International sales hotline)

Holtek Semiconductor (Shanghai) Inc.

7th Floor, Building 2, No.889, Yi Shan Rd., Shanghai, China
Tel: 021-6485-5560
Fax: 021-6485-0313

Holtek Semiconductor (Hong Kong) Ltd.

RM.711, Tower 2, Cheung Sha Wan Plaza, 833 Cheung Sha Wan Rd., Kowloon, Hong Kong
Tel: 852-2-745-8288
Fax: 852-2-742-8657

Holmate Semiconductor, Inc.

48531 Warm Springs Boulevard, Suite 413, Fremont, CA 94539
Tel: 510-252-9880
Fax: 510-252-9885

Copyright © 2000 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.