

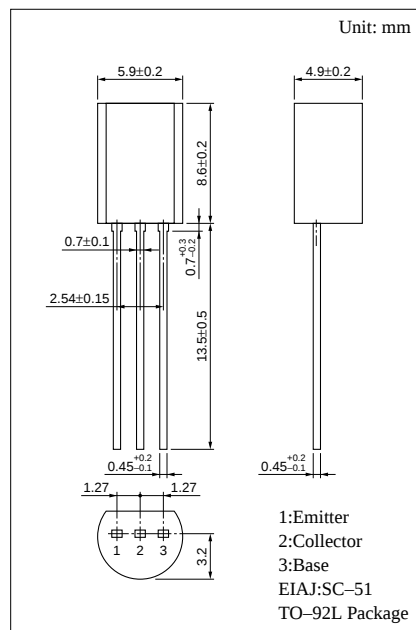
Silicon NPN triple diffusion planer type

For small TV video output

■ Features

- High collector to emitter voltage V_{CE0} .
- High transition frequency f_T .

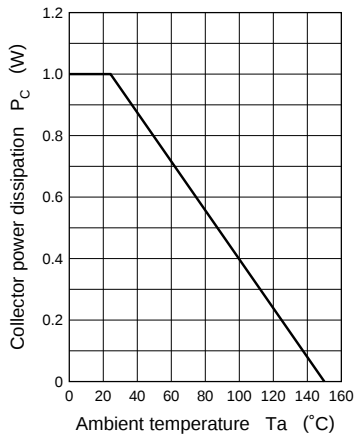
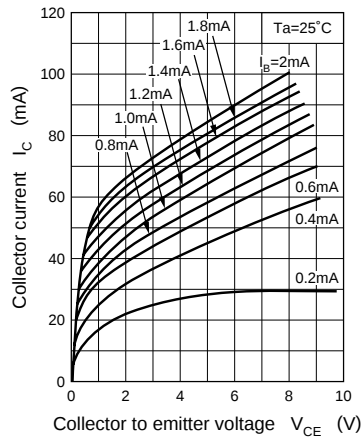
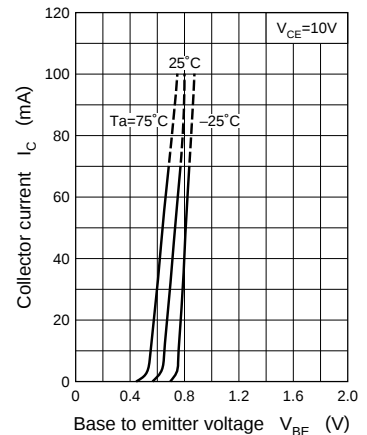
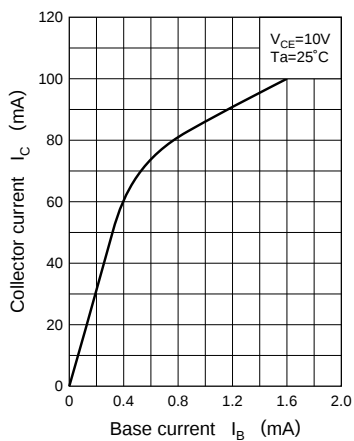
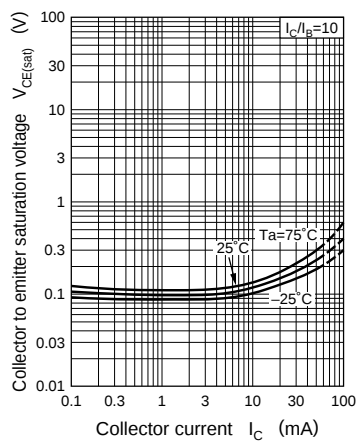
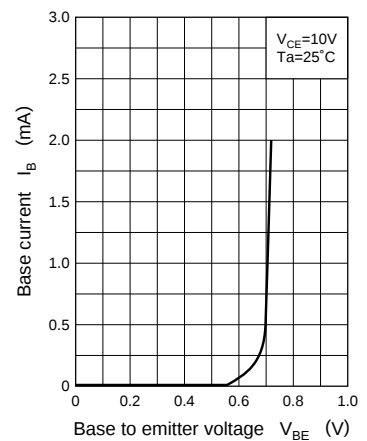
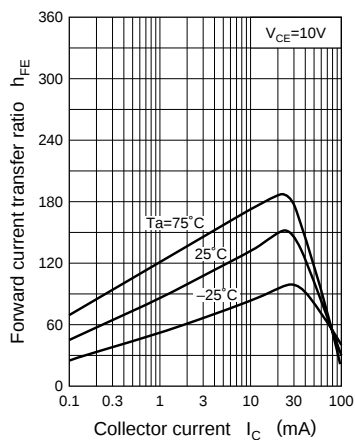
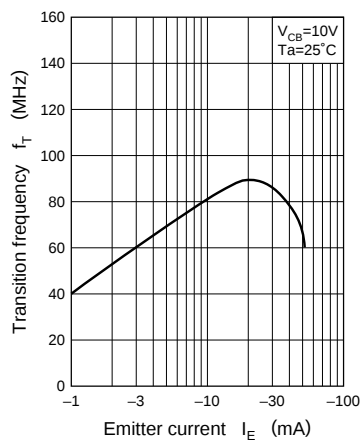
Parameter		Symbol	Ratings	Unit
Collector to base voltage	2SC1573	V_{CBO}	250	V
	2SC1573A		300	
	2SC1573B		400	
Collector to emitter voltage	2SC1573	V_{CEO}	200	V
	2SC1573A		300	
	2SC1573B		400	
Emitter to base voltage		V_{EBO}	7	V
Peak collector current		I_{CP}	100	mA
Collector current		I_C	70	mA
Collector power dissipation		P_C	1	W
Junction temperature		T_j	150	°C
Storage temperature		T_{stg}	-55 ~ +150	°C



Parameter		Symbol	Conditions	min	typ	max	Unit
Collector cutoff current		I_{CBO}	$V_{CB} = 12V, I_E = 0$			2	μA
Collector to emitter voltage	2SC1573	V_{CEO}	$I_C = 100\mu A, I_B = 0$	200			V
	2SC1573A			300			
	2SC1573B			400			
Emitter to base voltage	2SC1573	V_{EBO}	$I_E = 1\mu A, I_C = 0$	5			V
	2SC1573A			7			
	2SC1573B						
Forward current transfer ratio		h_{FE}^*	$V_{CE} = 10V, I_C = 5mA$	30		220	
Collector to emitter saturation voltage		$V_{CE(sat)}$	$I_C = 50mA, I_B = 5mA$			1.2	V
Transition frequency		f_T	$V_{CB} = 10V, I_E = -10mA, f = 200MHz$	50	80		MHz
Collector output capacitance	2SC1573	C_{ob}	$V_{CB} = 10V, I_E = 0, f = 1MHz$		5	10	pF
	2SC1573A				4	8	
	2SC1573B						

Rank	P	Q	R
h_{FE}	30 ~ 100	60 ~ 150	100 ~ 220

Panasonic

$P_C - T_a$  $I_C - V_{CE}$  $I_C - V_{BE}$  $I_C - I_B$  $V_{CE(sat)} - I_C$  $I_B - V_{BE}$  $h_{FE} - I_C$  $f_T - I_E$  $C_{ob} - V_{CB}$ 