

International
IOR Rectifier

45MT160P

THREE PHASE CONTROLLED BRIDGE

Power Module

40 A

Features

- High thermal conductivity package, electrically insulated case
- 4000 V_{RMS} isolating voltage

Major Ratings and Characteristics

Parameters	45MT160P	Units
I_o	40(36)	A
@ T_c	78(85)	°C
I_{FSM} @50Hz	390	A
@60Hz	410	
I^2t @50Hz	770	A ² s
@60Hz	700	
$I^2\sqrt{t}$	7700	A ² √s
V_{RRM}	1600	V
T_{STG} range	-40 to 150	°C
T_J range Diode	-40 to 125	
T_J range Scr	-40 to 100	

45MT160P

Bulletin I27600 rev. C 11/00

International
IOR Rectifier**ELECTRICAL SPECIFICATIONS**

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak reverse voltage V	V_{DRM} , max. repetitive peak off-state voltage gate open circuit V	I_{RRM}/I_{DRM} max. @ $T_J = T_J$ max. mA
45MT160P	160	1600	1700	1600	15

Forward Conduction

Parameter	45MT160P	Units	Conditions			
I _O Maximum DC output current @ Case temperature	40 (36)	A	120° Rect conduction angle			
	78 (85)	°C				
I _{TSM} Maximum peak, one-cycle forward, non-repetitive on state surge current	390	A	t = 10ms	No voltage	Initial T _J = T _J max.	
	410		t = 8.3ms	reapplid		
	330		t = 10ms	100% V _{RRM}		
	345		t = 8.3ms	reapplid		
I ² t Maximum I ² t for fusing	770	A ² s	t = 10ms	No voltage		T _J = T _J max.
	700		t = 8.3ms	reapplid		
	540		t = 10ms	100% V _{RRM}		
	500		t = 8.3ms	reapplid		
I ² √t Maximum I ² √t for fusing	7700	A ² √s	t = 0.1 to 10ms, no voltage reapplid			
V _{T(TO)} Value of threshold voltage	0.98	V	@ T _J max.			
r _t Low level value on-state	11	mΩ				
V _{TM} Maximum on-state voltage drop	1.33	V	I _{pk} = 30A, T _J = 25°C t _p = 400μs single junction			
di/dt Maximum non-repetitive rate of rise of turned on current	150	A/μs	T _J = 25°C, from 0.67 V _{DRM} , I _{TM} = π × I _{T(AV)} , I _g = 500mA, t _r < 0.5 μs, t _p > 6 μs			
I _H Maximum Holding Current	200	mA	T _J = 25°C, anode supply = 6V, resistive load, gate open circuit			
I _L Maximum Latching Current	400		T _J = 25°C, anode supply = 6V, resistive load			

Blocking

Parameter	45MT160P	Units	Conditions
V_{INS} RMS isolation voltage	4000	V	$T_J = 25^\circ C$ all terminal shorted f = 50Hz, t = 1s
dv/dt Max. critical rate of rise of off-state voltage	1000	V/μs	$T_J = T_J$ max., linear to 0.67 V_{DRM} , gate open circuit

Triggering

Parameter	45MT160P	Units	Conditions
P_{GM} Max. peak gate power	10	W	$T_J = T_J \text{ max.}$
$P_{G(AV)}$ Max. average gate power	2.5		
I_{GM} Max. peak gate current	2.5	A	
$-V_{GT}$ Max. peak negative gate voltage	10	V	
V_{GT} Max. required DC gate voltage to trigger	4.0	V	$T_J = -40^\circ\text{C}$
	2.5		$T_J = 25^\circ\text{C}$
	1.7		$T_J = T_J \text{ max.}$
I_{GT} Max. required DC gate current to trigger	270	mA	$T_J = -40^\circ\text{C}$
	150		$T_J = 25^\circ\text{C}$
	80		$T_J = T_J \text{ max.}$
V_{GD} Max. gate voltage that will not trigger	0.25	V	@ $T_J = T_J \text{ max.}$, rated V_{DRM} applied
I_{GD} Max. gate current that will not trigger	6	mA	

Thermal and Mechanical Specifications

Parameter	45MT160P	Units	Conditions
T_J Maximum junction operating temperature range	- 40 to 125 - 40 to 100	$^\circ\text{C}$	for diodes for Scr
T_{stg} Maximum storage temperature range	-40 to 150	$^\circ\text{C}$	
R_{thJC} Maximum thermal resistance, junction to case	0.32	K/W	DC operation per module
	1.9		DC operation per junction
	0.4		120° Rect conduction angle per module
	2.42		120° Rect conduction angle per junction
R_{thCS} Maximum thermal resistance, case to heatsink	0.1	K/W	Per module Mounting surface smooth, flat and greased
T Mounting torque $\pm 10\%$ to heatsink	4	Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
wt Approximate weight	60	g	

ΔR Conduction (per Junction)

(The following table shows the increment of thermal resistance R_{thJC} when device operate at different conduction angles than DC)

Device	Sinusoidal conduction @ $T_J \text{ max.}$					Rectangular conduction @ $T_J \text{ max.}$					Units
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
45MT160P	0.469	0.55	0.69	1.005	1.87	0.289	0.521	0.72	1.065	1.891	K/W

45MT160P

Bulletin I27600 rev. C 11/00

Ordering Information Table

Device Code				
4	5	MT	160	P
①	②	③	④	
1				
2				
3				
4				
1				
2				
3				
4				

1

- Current rating code: 4 = 40 A (Avg)

2

- Circuit configuration code


3

- Essential part number

4

- Voltage code: Code x 10 = V_{RRM} (See Voltage Ratings Table)

Outline Table

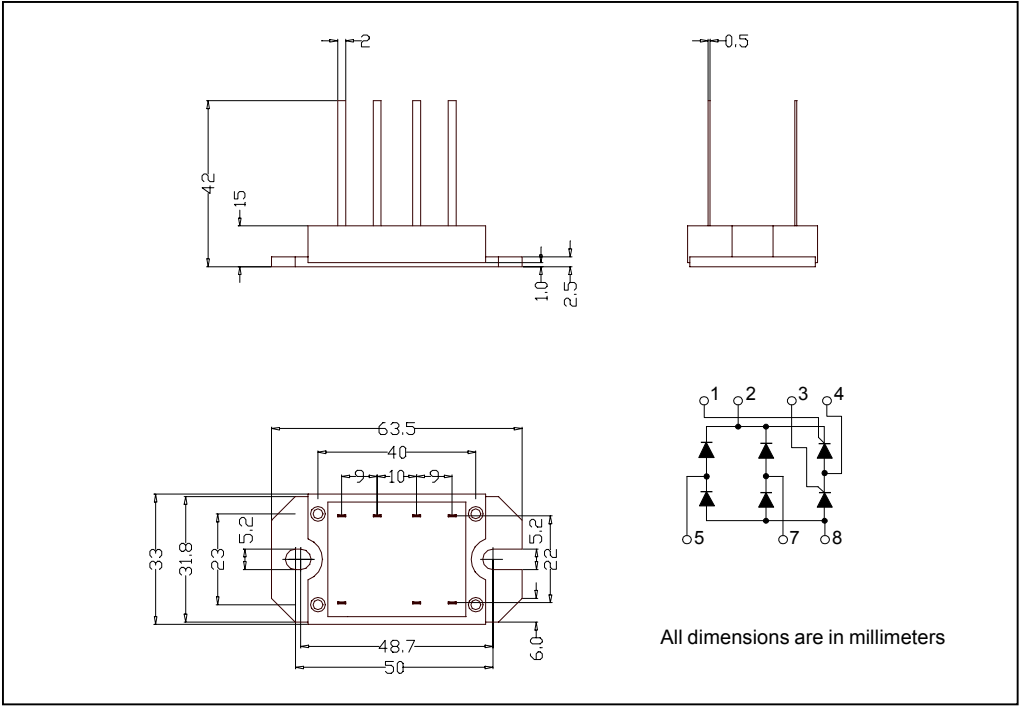

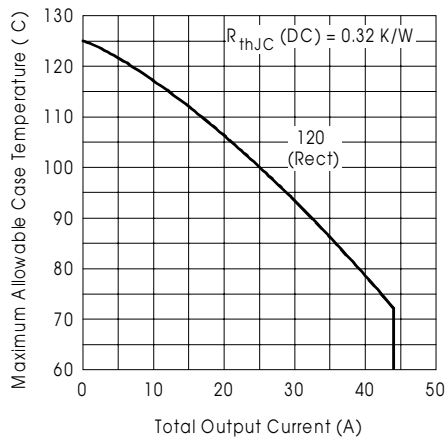


Fig. 1 - Current Rating Characteristics

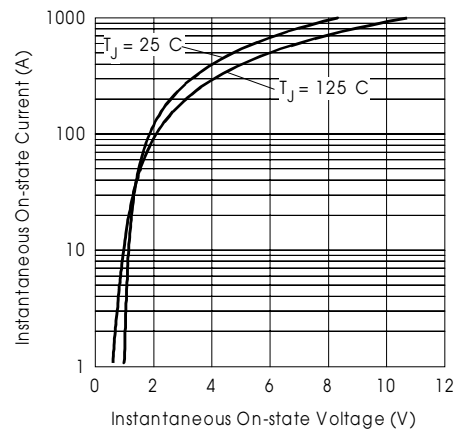


Fig. 2 - On-state Voltage Drop Characteristics

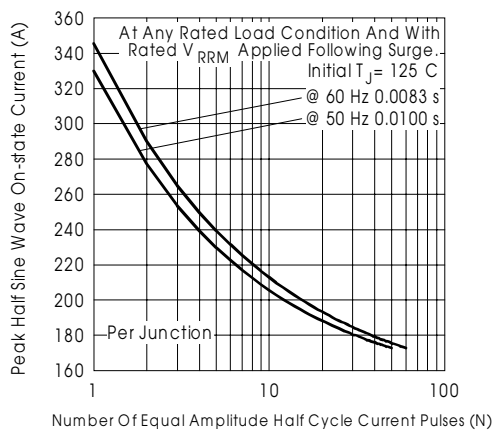


Fig. 3 - Maximum Non-Repetitive Surge Current

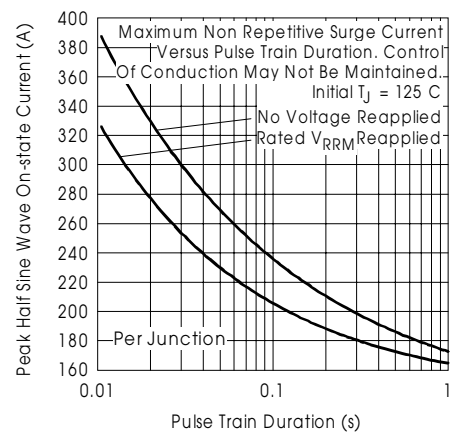


Fig. 4 - Maximum Non-Repetitive Surge Current

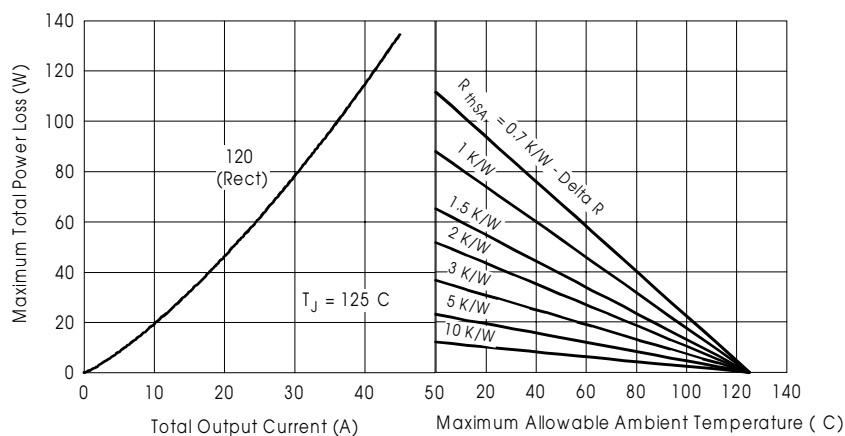


Fig. 5 - Current Rating Nomogram (1 Module Per Heatsink)

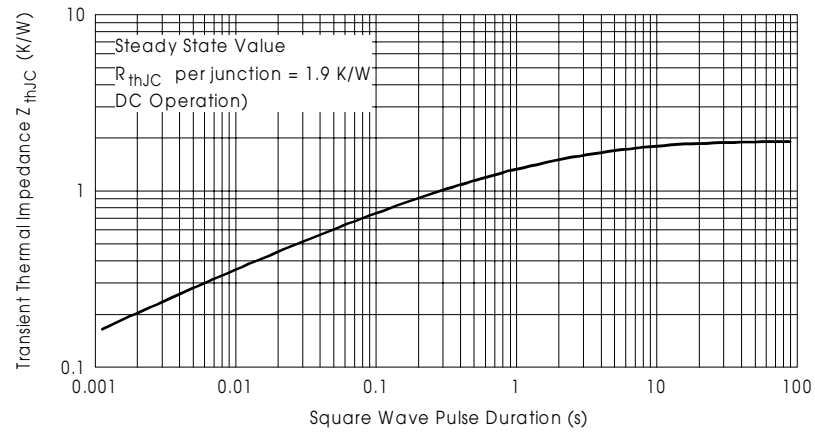


Fig. 6 - Thermal Impedance Z_{thJC} Characteristics

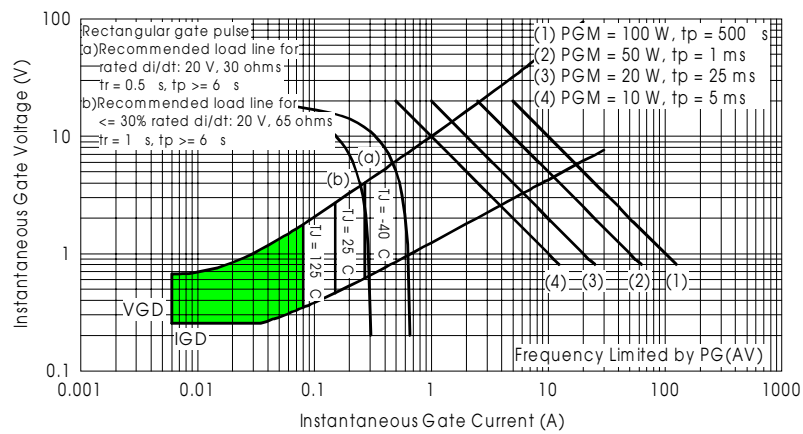


Fig. 7 - Gate Characteristics

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.