

International  
**IOR** Rectifier

87CNQ020  
 87CNQ020SM  
 87CNQ020SL

SCHOTTKY RECTIFIER

80 Amp

#### Major Ratings and Characteristics

| Characteristics                                     | Values     | Units            |
|-----------------------------------------------------|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform                    | 80         | A                |
| $V_{RRM}$                                           | 20         | V                |
| $I_{FSM}$ @ tp = 5 $\mu$ s sine                     | 6000       | A                |
| $V_F$ @ 40 Apk, $T_J = 125^\circ\text{C}$ (per leg) | 0.32       | V                |
| $T_J$ range                                         | -55 to 150 | $^\circ\text{C}$ |

#### Description/Features

The center tap Schottky rectifier module has been optimized for ultra low forward voltage drop specifically for 3.3V output power supplies. The proprietary barrier technology allows for reliable operation up to  $150^\circ\text{C}$  junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- $150^\circ\text{C}$   $T_J$  operation
- Center tap module
- Optimized for 3.3V application
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low profile, small footprint, high current package

#### Case Styles

| 87CNQ020                                                                            | 87CNQ020SM                                                                          | 87CNQ020SL                                                                            |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |
| D61-8                                                                               | D61-8-SM                                                                            | D61-8-SL                                                                              |

## Voltage Ratings

| Part number                                | 87CNQ020 / ..020SM / ..020SL |  |
|--------------------------------------------|------------------------------|--|
| $V_R$ Max. DC Reverse Voltage (V) @ 125° C | 20                           |  |
| $V_R$ Max. DC Reverse Voltage (V) @ 150° C | 10                           |  |

## Absolute Maximum Ratings

| Parameters                                                              | 87CNQ        | Units | Conditions                                                                                                                                                 |
|-------------------------------------------------------------------------|--------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_{F(AV)}$ Max. Average Forward (Per Device)<br>Current (Per Leg)      | 80<br>40     | A     | 50% duty cycle @ $T_C = 135^\circ\text{C}$ , rectangular waveform                                                                                          |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive<br>Surge Current (Per Leg) | 6000<br>1100 | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse<br>10ms Sine or 6ms Rect. pulse<br>Following any rated load condition and with rated $V_{RRM}$ applied |
| $E_{AS}$ Non-Repetitive Avalanche Energy<br>(Per Leg)                   | 36           | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 8\text{ Amps}$ , $L = 1.12\text{ mH}$                                                                                 |
| $I_{AR}$ Repetitive Avalanche Current<br>(Per Leg)                      | 8            | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical                                   |

## Electrical Specifications

| Parameters                                             | 87CNQ  | Units            | Conditions                                                              |
|--------------------------------------------------------|--------|------------------|-------------------------------------------------------------------------|
| $V_{FM}$ Max. Forward Voltage Drop<br>(Per Leg) (1)    | 0.45   | V                | @ 40A<br>$T_J = 25^\circ\text{C}$                                       |
|                                                        | 0.51   | V                | @ 80A                                                                   |
|                                                        | 0.32   | V                | @ 40A<br>$T_J = 125^\circ\text{C}$                                      |
|                                                        | 0.39   | V                | @ 80A                                                                   |
|                                                        | 0.29   | V                | @ 40A<br>$T_J = 150^\circ\text{C}$                                      |
|                                                        | 0.37   | V                | @ 80A                                                                   |
| $I_{RM}$ Max. Reverse Leakage Current<br>(Per Leg) (1) | 5.5    | mA               | $T_J = 25^\circ\text{C}$<br>$V_R = \text{rated } V_R$                   |
|                                                        | 550    | mA               | $T_J = 125^\circ\text{C}$                                               |
|                                                        | 90     | mA               | $T_J = 125^\circ\text{C}$<br>$V_R = 5\text{V}$                          |
|                                                        | 70     | mA               | $T_J = 125^\circ\text{C}$<br>$V_R = 3.3\text{V}$                        |
|                                                        | 480    | mA               | $T_J = 150^\circ\text{C}$<br>$V_R = 10\text{V}$                         |
| $V_{F(TO)}$ Threshold Voltage                          | 0.191  | V                | $T_J = T_J \text{ max.}$                                                |
| $r_t$ Forward Slope Resistance                         | 2.3    | m $\Omega$       |                                                                         |
| $C_T$ Max. Junction Capacitance (Per Leg)              | 6500   | pF               | $V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$ |
| $L_S$ Typical Series Inductance (Per Leg)              | 5.5    | nH               | Measured lead to lead 5mm from package body                             |
| $dv/dt$ Max. Voltage Rate of Change<br>(Rated $V_R$ )  | 10,000 | V/ $\mu\text{s}$ |                                                                         |

## Thermal-Mechanical Specifications

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

| Parameters                                                              | 87CNQ       | Units              | Conditions                           |
|-------------------------------------------------------------------------|-------------|--------------------|--------------------------------------|
| $T_J$ Max. Junction Temperature Range                                   | -55 to 150  | $^\circ\text{C}$   |                                      |
| $T_{stg}$ Max. Storage Temperature Range                                | -55 to 150  | $^\circ\text{C}$   |                                      |
| $R_{thJC}$ Max. Thermal Resistance Junction<br>to Case (Per Leg)        | 0.85        | $^\circ\text{C/W}$ | DC operation                         |
| $R_{thJC}$ Max. Thermal Resistance Junction<br>to Case (Per Package)    | 0.42        | $^\circ\text{C/W}$ | DC operation                         |
| $R_{thCS}$ Typical Thermal Resistance, Case<br>to Heatsink (D61-8 Only) | 0.30        | $^\circ\text{C/W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight                                                   | 7.8(0.28)   | g(oz.)             |                                      |
| T Mounting Torque (D61-8 Only)                                          | Min. 40(35) | Kg-cm<br>(lbf-in)  |                                      |
|                                                                         | Max. 58(50) |                    |                                      |

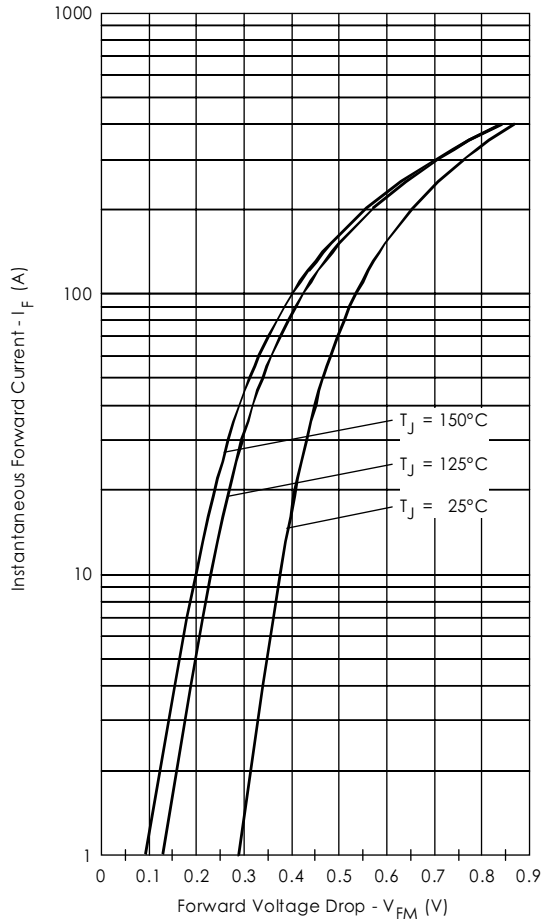


Fig. 1 - Max. Forward Voltage Drop Characteristics (PerLeg)

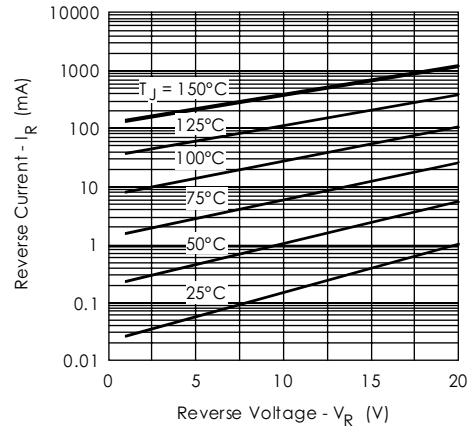


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (PerLeg)

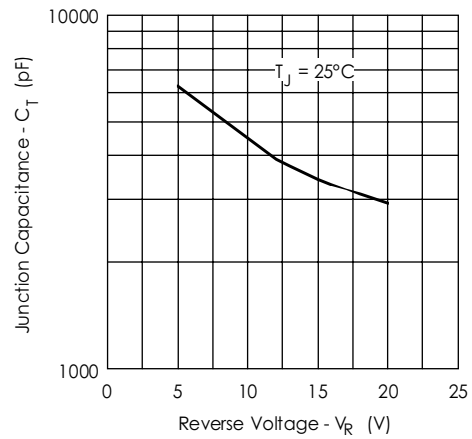


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (PerLeg)

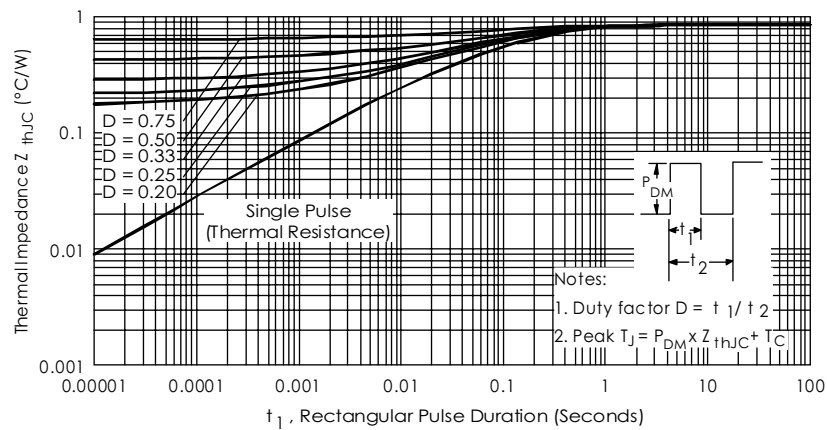


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (PerLeg)

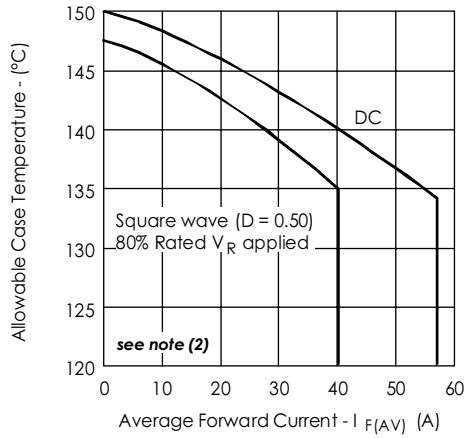


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

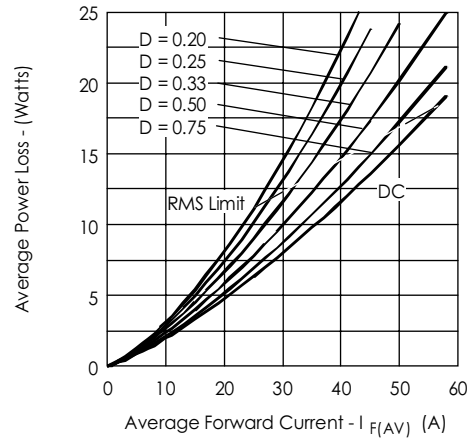


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

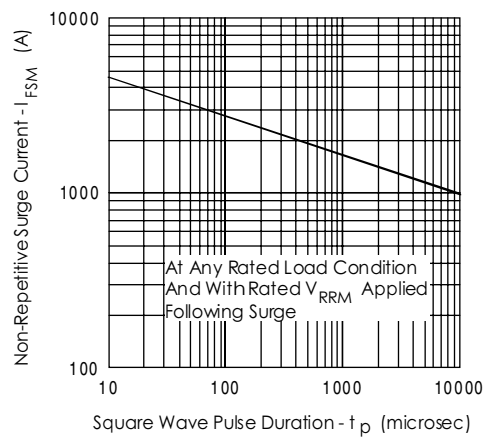


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

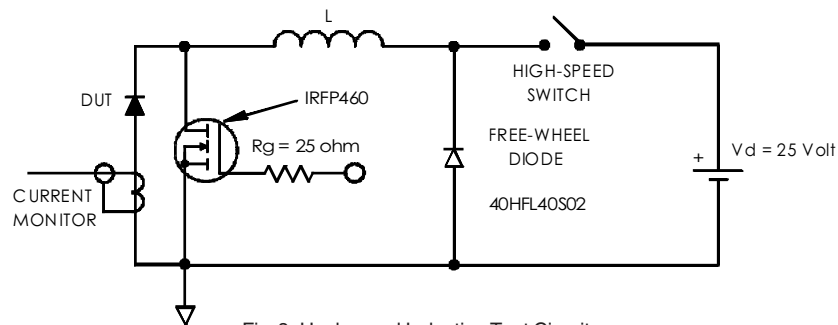



Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;


$P_d$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM}$  @  $(I_{F(AV)} / D)$  (see Fig. 6);

$P_{d_{REV}}$  = Inverse Power Loss =  $V_{R1} \times I_{R1} (1 - D)$ ;  $I_{R1}$  @  $V_{R1} = 80\%$  rated  $V_R$

Outline Table

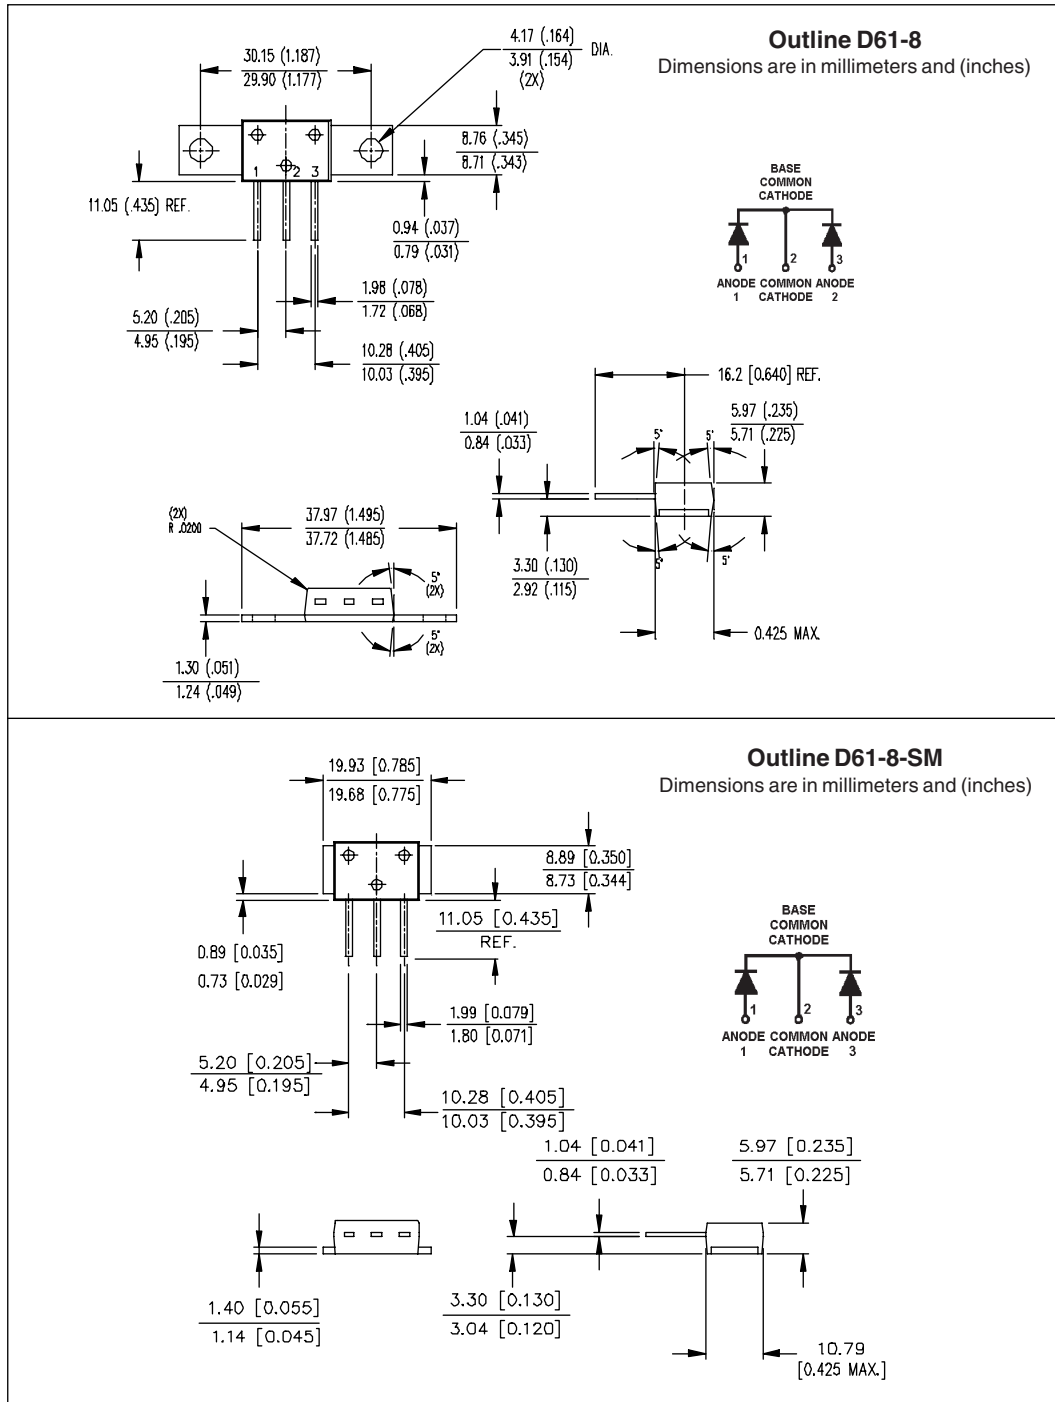

## Outline Table

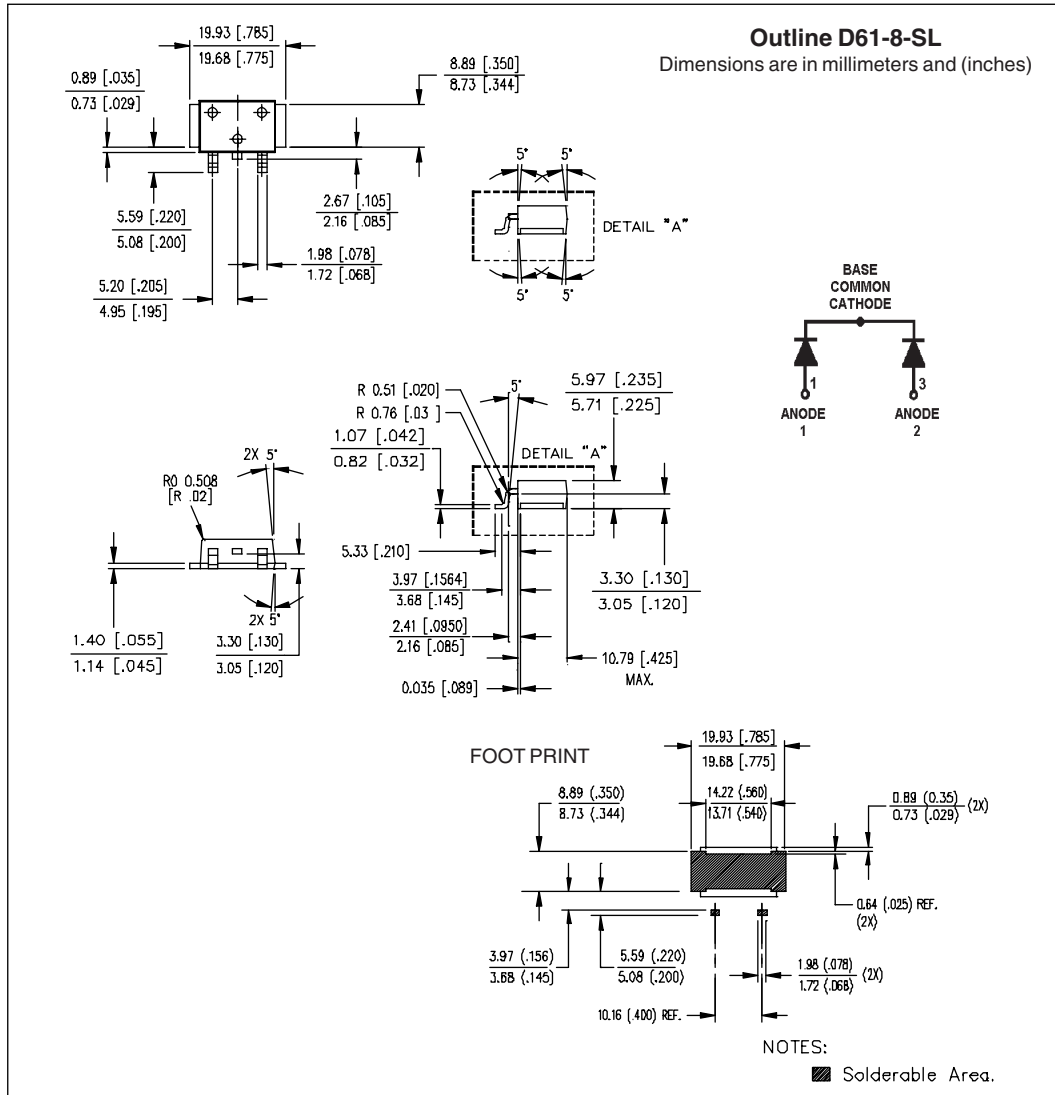International  
IR Rectifier

**WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.  
**EUROPEAN HEADQUARTERS:** Hurst Green, Oxsted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.  
**IR CANADA:** 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.  
**IR GERMANY:** Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.  
**IR ITALY:** Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.  
**IR FAR EAST:** K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.  
**IR SOUTHEAST ASIA:** 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.  
**IR TAIWAN:** 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.