

International ICR Rectifier

95SQ015

SCHOTTKY RECTIFIER

9 Amp



Major Ratings and Characteristics

Characteristics	95SQ015	Units
$I_{F(AV)}$ Rectangular waveform	9	A
V_{RRM}	15	V
I_{FSM} @ $t_p = 5 \mu s$ sine	2900	A
V_F @ $9 A_{pk}, T_J = 75^\circ C$	0.25	V
T_J range	-55 to 100	°C

Description/Features

The 95SQ015 axial leaded Schottky rectifier has been optimized for ultra low forward voltage drop specifically for the OR-ing of parallel power supplies. The proprietary barrier technology allows for reliable operation up to $100^\circ C$ junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- $125^\circ C T_J$ operation ($V_R < 5V$)
- Optimized for OR-ing applications
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance

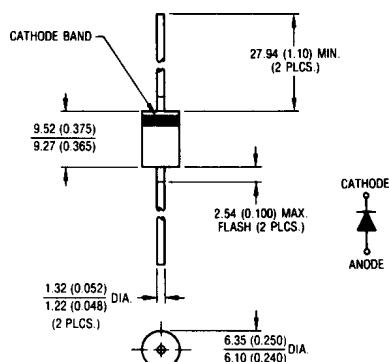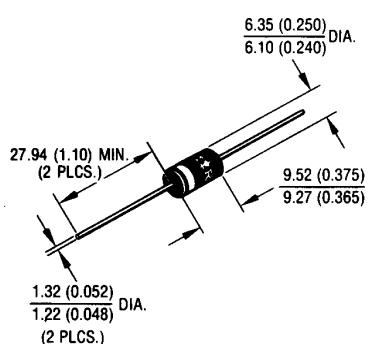CASE STYLE AND DIMENSIONS

Conforms to JEDEC Outline DO - 204AR

Dimensions in millimeters and inches

95SQ015

Bulletin PD-2.273 rev. B 02/01

International
 Rectifier

Voltage Ratings

Part number	95SQ015	
V_R Max. DC Reverse Voltage (V)	15	
V_{RWM} Max. Working Peak Reverse Voltage (V)	25	

Absolute Maximum Ratings

Parameters	95SQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	9	A	50% duty cycle @ $T_c = 55^\circ C$, rectangular waveform
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	2900	A	5μs Sine or 3μs Rect. pulse
	400		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy	4.50	mJ	$T_J = 25^\circ C$, $I_{AS} = 1$ Amps, $L = 9$ mH
I_{AR} Repetitive Avalanche Current	1	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 3 \times V_R$ typical

Electrical Specifications

Parameters	95SQ	Units	Conditions	
V_{FM} Max. Forward Voltage Drop (1) * See Fig. 1	0.31	V	@ 9A	$T_J = 25^\circ C$
	0.37	V	@ 18A	
	0.25	V	@ 9A	$T_J = 75^\circ C$
	0.31	V	@ 18A	
I_{RM} Max. Reverse Leakage Current (1) * See Fig. 2	7	mA	$T_J = 25^\circ C$	$V_R = \text{rated } V_R$
	348	mA	$T_J = 100^\circ C$	
	310	mA	$T_J = 100^\circ C$	$V_R = 12V$
	190	mA	$T_J = 100^\circ C$	$V_R = 5V$
C_T Max. Junction Capacitance	1300	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ C$	
L_S Typical Series Inductance	10.0	nH	Measured lead to lead 5mm from body	
dv/dt Max. Voltage Rate of Change (Rated V_R)	10,000	V/ μs		

(1) Pulse Width < 300μs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	95SQ	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 125	°C	
T_{stg} Max. Storage Temperature Range	-55 to 150	°C	
R_{thJL} Max. Thermal Resistance Junction to Lead	8.0	°C/W	DC operation * See Fig. 4 1/8 inch lead length
R_{thJA} Typical Thermal Resistance, Junction to Air	44	°C/W	
wt Approximate Weight	1.4(0.049)	g(oz.)	
Case Style	DO-204AR		JEDEC

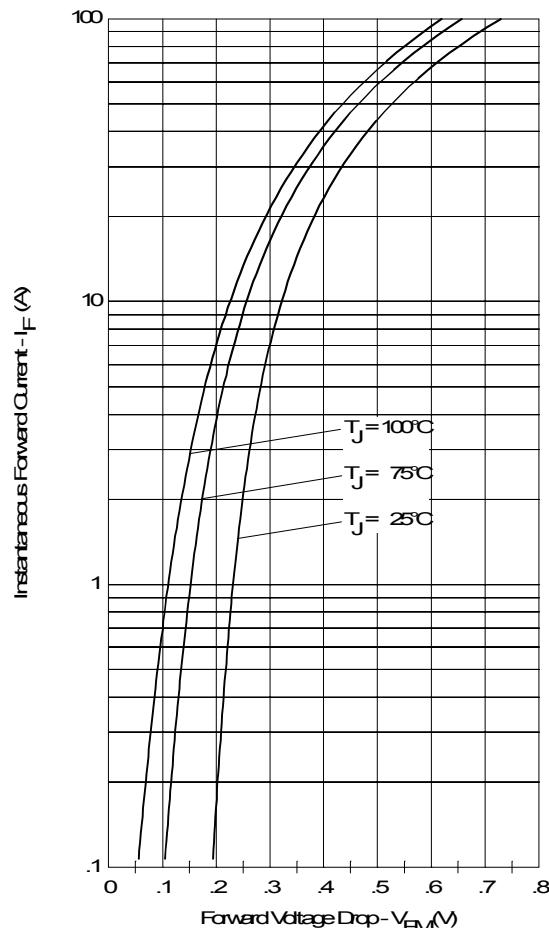


Fig. 1-Maximum Forward Voltage Drop Characteristics

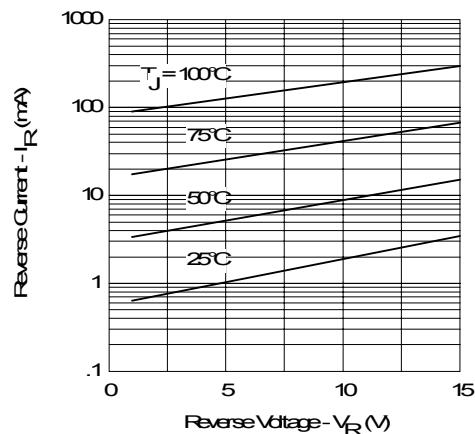


Fig. 2-Typical Values of Reverse Current Vs. Reverse Voltage

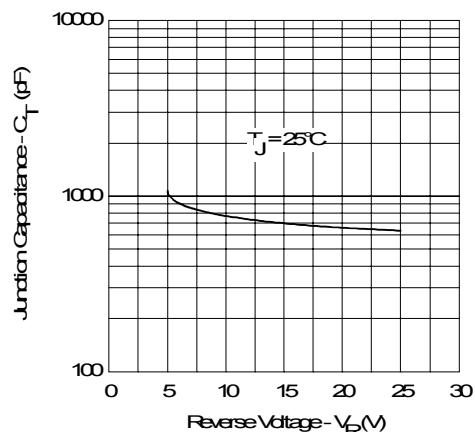


Fig. 3-Typical Junction Capacitance Vs. Reverse Voltage

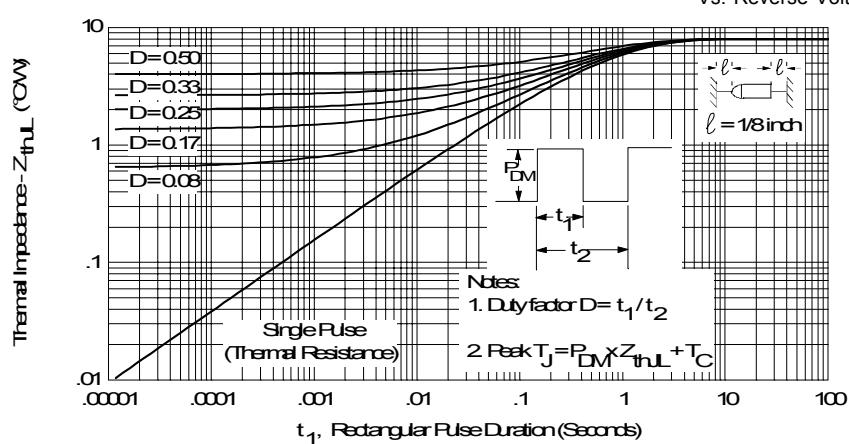


Fig. 4-Maximum Thermal Impedance Z_{thL} Characteristics

95SQ015

Bulletin PD-2.273 rev. B 02/01

International
IR Rectifier

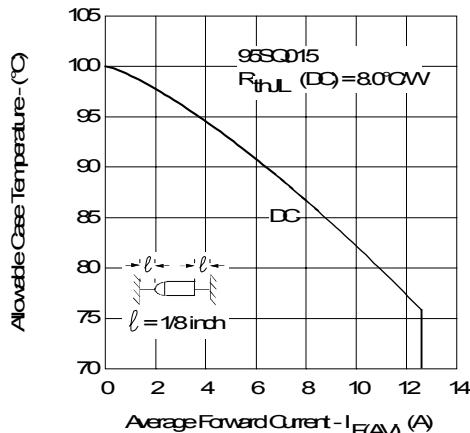


Fig. 5-Maximum Allowable Case Temperature
Vs. Average Forward Current

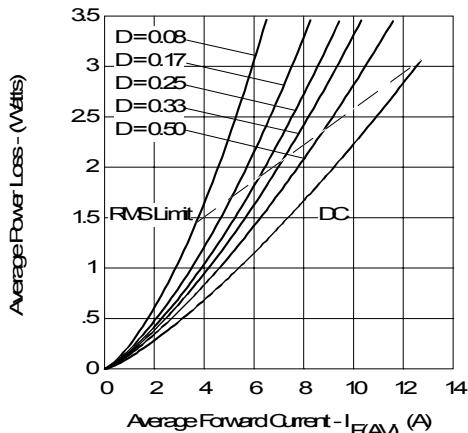


Fig. 6-Forward Power Loss Characteristics

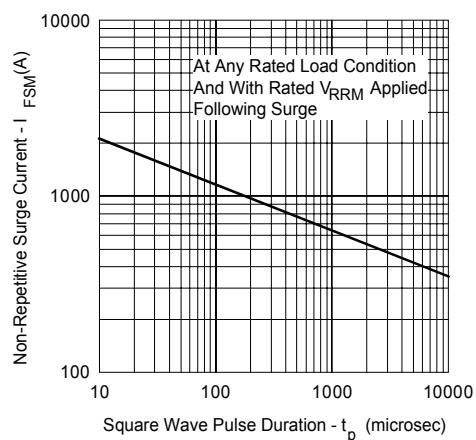


Fig. 7-Maximum Non-Repetitive Surge Current

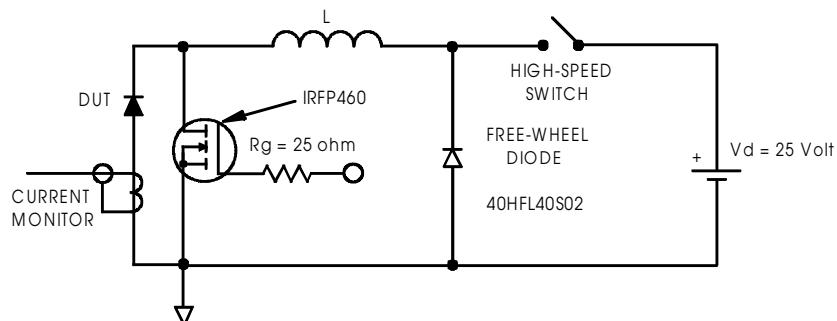


Fig. 8-Unclamped Inductive Test Circuit