




7-19-00

AD9744

- 14-Bit Resolution
- 150 MSPS Conversion Rate
- 2's Complement or Straight Binary format
- SFDR @ 2 to 40MHz: ~80dBc
- Differential/Single Ended Clock Input
- LVDS or +3V Compatible CMOS Inputs
- Single +3 V Supply Operation
- Power Dissipation: ~65 mW @ 3V
- On-chip 1.2 V Reference
- 28 pin SOIC/TSSOP packages

Wideband Communications Transmit Channel:
Direct IF
Digital Quadrature Modulation Architectures
W-CDMA, Multi-Carrier GSM, TDMA, CDMA Systems
Instrumentation:
ATE, Signal Synthesis

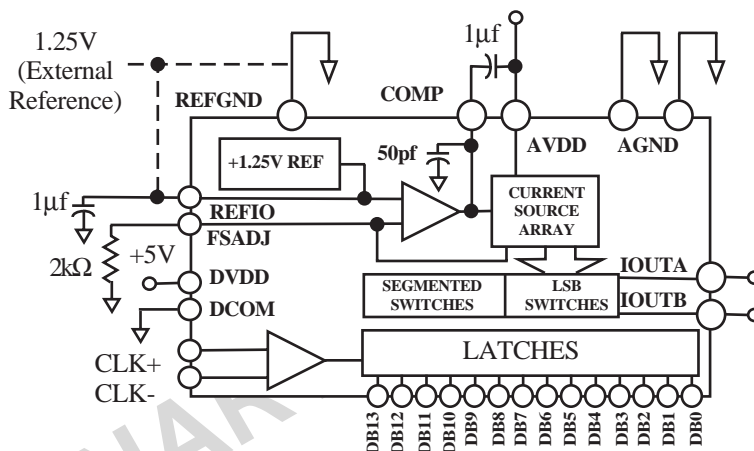

BLOCK DIAGRAM

The AD9744 is a high precision 14-bit TxDAC+ with state of the art distortion and noise performance. The AD9744 was developed to meet the demanding performance requirements of the most stringent multi-carrier and 3rd generation basestations. The flexible clock interface can accept a variety of input types such as 1V p-p sine wave LO inputs, CMOS clock inputs, single ended or differential inputs.

The DAC utilizes a segmented current-source architecture combined with a proprietary switching technique to reduce glitch energy and to maximize dynamic accuracy. The DAC provides differential current output thus supporting single-ended or differential applications. The AD9744 differential current output is identical to that of the entire TxDAC and TxDAC+ family and provides a nominal full-scale current from 2 to 20mA. The AD9744 is manufactured on an advanced low cost 0.35micron CMOS process. It operates from a single supply of 2.7 V to 3.6 V and consumes ~65 mW of power.

Targeted at ultra-wide dynamic range, multi-carrier and multi-standard systems, desiring unmatched distortion and noise performance.

1. The AD9744 is a 14 bit TxDAC+ with excellent INL and DNL performance..
2. 2's complement or straight binary data coding.
3. High Speed 150 MSPS conversion rate.
4. Flexible clock input with single-ended or differential input, CMOS or 1V p-p LO sinewave input capability.
5. Low Power: Complete CMOS DAC function operates on ~65mW from a 2.7 V to 3.6 V single supply. The DAC full-scale current can be reduced for lower power operation, and a sleep mode is provided for low-power idle periods.
6. On-chip Voltage Reference: The AD9744 includes a 1.20 V temperature-compensated bandgap voltage reference.
7. Small 28 pin SOIC/TSSOP packages.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781/329-4700 World Wide Web Site: <http://www.analog.com>
Fax: 781/326-8703 © Analog Devices, Inc., 1998