
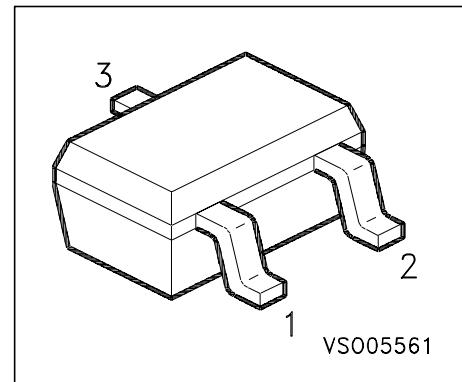


Silicon Switching Diode Array

- Connected in series
- For high speed switching applications



Type	Marking	Ordering Code	Pin Configuration			Package
BAV 99W	A7s	Q62702-A1051	1=A1	2=C2	3=C1/A2	SOT-323

Maximum Ratings per Diode

Parameter	Symbol	Values	Unit
Diode reverse voltage	V_R	70	V
Peak reverse voltage	V_{RM}	70	
Forward current	I_F	200	mA
Surge forward current, $t = 1 \mu s$	I_{FS}	4.5	A
Total Power dissipation	P_{tot}		mW
$T_S = 103^\circ C$		250	
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	- 65 ... + 150	

Thermal Resistance

Junction ambient ¹⁾	R_{thJA}	≤ 430	K/W
Junction - soldering point	R_{thJS}	≤ 190	


1) Package mounted on epoxy pcb 40mm x 40mm x 1.5mm / 0.5cm² Cu

Electrical Characteristics at $T_A=25^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC characteristics per Diode					
Breakdown voltage $I_{(\text{BR})} = 100 \mu\text{A}$	$V_{(\text{BR})}$	70	-	-	V
Forward voltage $I_F = 1 \text{ mA}$	V_F	-	-	715	mV
$I_F = 10 \text{ mA}$		-	-	855	
$I_F = 50 \text{ mA}$		-	-	1000	
$I_F = 150 \text{ mA}$		-	-	1250	
Reverse current $V_R = 70 \text{ V}, T_A = 25^\circ\text{C}$	I_R	-	-	2.5	μA
$V_R = 25 \text{ V}, T_A = 150^\circ\text{C}$		-	-	30	
$V_R = 70 \text{ V}, T_A = 150^\circ\text{C}$		-	-	50	
AC characteristics per Diode					
Diode capacitance $V_R = 0 \text{ V}, f = 1 \text{ MHz}$	C_D	-	-	1.5	pF
Reverse recovery time $I_F = 10 \text{ mA}, I_R = 10 \text{ mA}, R_L = 100 \Omega$ t_{rr} measured at 1 mA	t_{rr}	-	-	6	ns

Forward current $I_F = f(T_A^*; T_S)$

* Package mounted on epoxy

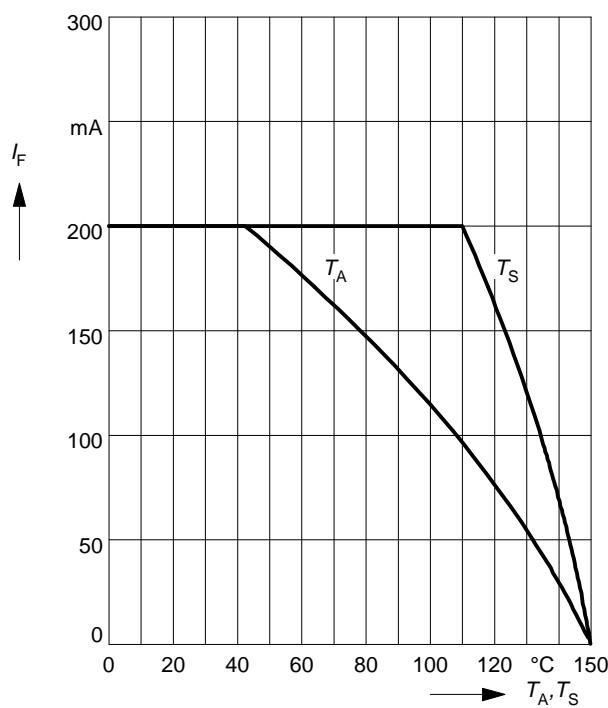


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

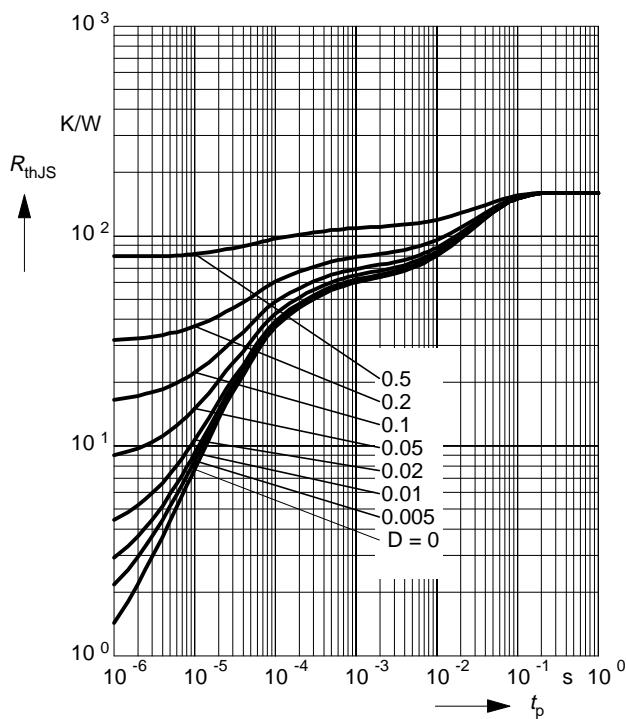


Forward current $I_F = f(V_F)$


$T_A = 25^\circ\text{C}$

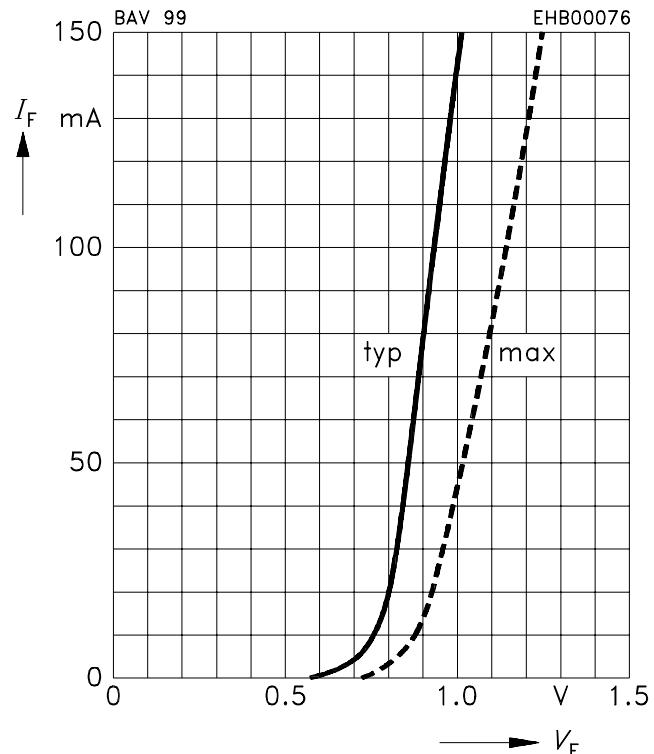

Permissible Pulse Load $I_{F\text{max}}/I_{F\text{DC}} = f(t_p)$

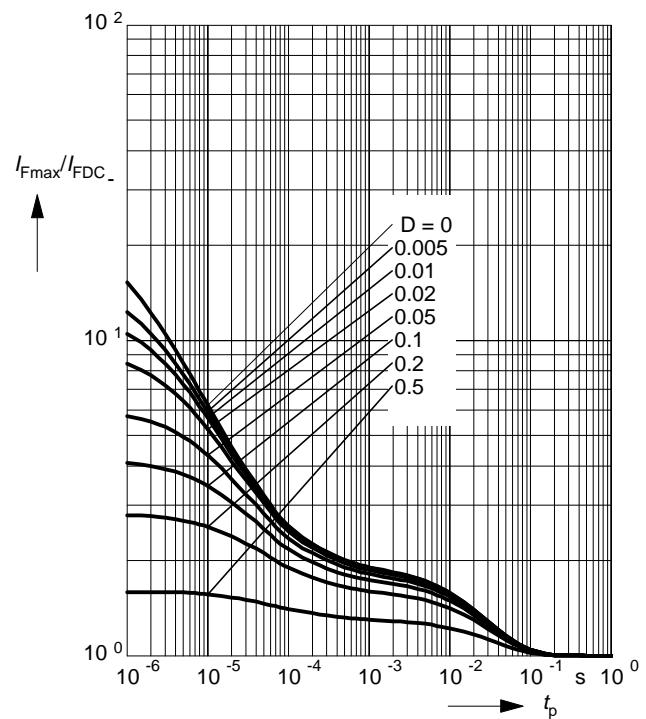

Forward voltage $V_F = f(T_A)$

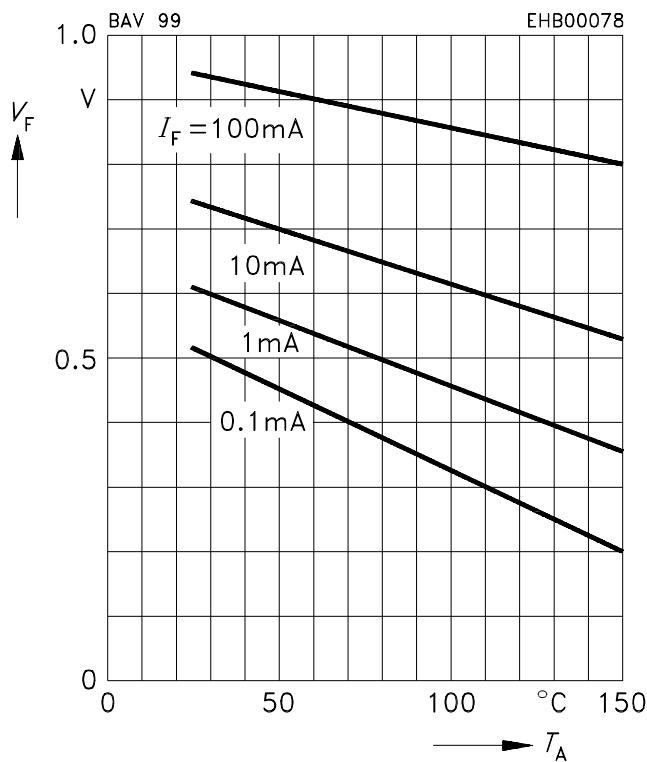

Reverse current $I_R = f(T_A)$

