


## SMALL SIGNAL NPN TRANSISTORS


Type	Marking
BC847B	1F

- SILICON EPITAXIAL PLANAR NPN TRANSISTORS
- MINIATURE PLASTIC PACKAGE FOR APPLICATION IN SURFACE MOUNTING CIRCUITS
- LOW LEVEL GENERAL PURPOSE
- PNP COMPLEMENT IS BC857



SOT-23

### INTERNAL SCHEMATIC DIAGRAM

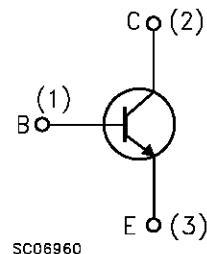

SC06960

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_{CES}$	Collector-Emitter Voltage ( $V_{BE} = 0$ )	50	V
$V_{CBO}$	Collector-Base Voltage ( $I_E = 0$ )	50	V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	45	V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	6	V
$I_C$	Collector Current	0.1	A
$I_{CM}$	Collector Peak Current	0.2	A
$I_{BM}$	Base Peak Current	0.2	A
$I_{EM}$	Emitter Peak Current	0.2	A
$P_{tot}$	Total Dissipation at $T_c = 25^\circ\text{C}$	300	mW
$T_{stg}$	Storage Temperature	-65 to 150	°C
$T_j$	Max. Operating Junction Temperature	150	°C

## THERMAL DATA

$R_{thj\text{-amb}}$ •	Thermal Resistance Junction-Ambient	Max	420	$^{\circ}\text{C/W}$
$R_{thj\text{-SR}}$ •	Thermal Resistance Junction-Substrate	Max	330	$^{\circ}\text{C/W}$

• Mounted on a ceramic substrate area =  $10 \times 8 \times 0.6 \text{ mm}$


ELECTRICAL CHARACTERISTICS ( $T_{\text{case}} = 25^{\circ}\text{C}$  unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{CBO}$	Collector Cut-off Current ( $I_E = 0$ )	$V_{CE} = 30 \text{ V}$ $V_{CE} = 30 \text{ V} \quad T_{\text{amb}} = 150^{\circ}\text{C}$			15 5	nA $\mu\text{A}$
$V_{(BR)CES}^*$	Collector-Emitter Breakdown Voltage ( $V_{BE} = 0$ )	$I_C = 10 \mu\text{A}$	50			V
$V_{(BR)CBO}^*$	Collector-Base Breakdown Voltage ( $I_E = 0$ )	$I_C = 10 \mu\text{A}$	50			V
$V_{(BR)CEO}^*$	Collector-Emitter Breakdown Voltage ( $I_B = 0$ )	$I_C = 2 \text{ mA}$	45			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ( $I_C = 0$ )	$I_C = 10 \mu\text{A}$	6			V
$V_{CE(\text{sat})}^*$	Collector-Emitter Saturation Voltage	$I_C = 10 \text{ mA} \quad I_B = 0.5 \text{ mA}$ $I_C = 100 \text{ mA} \quad I_B = 5 \text{ mA}$		0.09 0.2	0.25 0.6	V V
$V_{BE(\text{sat})}^*$	Base-Emitter Saturation Voltage	$I_C = 10 \text{ mA} \quad I_B = 0.5 \text{ mA}$ $I_C = 100 \text{ mA} \quad I_B = 5 \text{ mA}$		0.75 0.9		V V
$V_{BE(\text{on})}^*$	Base-Emitter On Voltage	$I_C = 2 \text{ mA} \quad V_{CE} = 5 \text{ V}$ $I_C = 10 \text{ mA} \quad V_{CE} = 5 \text{ V}$	0.58	0.63 0.7	0.7 0.77	V V
$h_{FE}^*$	DC Current Gain	$I_C = 10 \mu\text{A} \quad V_{CE} = 5 \text{ V}$ $I_C = 2 \text{ mA} \quad V_{CE} = 5 \text{ V}$	200	150 290	450	
$f_T$	Transition Frequency	$I_C = 10 \text{ mA} \quad V_{CE} = 5 \text{ V} \quad f = 100\text{MHz}$		300		MHz
$C_{CB}$	Collector Base Capacitance	$I_E = 0 \quad V_{CB} = 10 \text{ V} \quad f = 1 \text{ MHz}$			4.5	pF
$C_{EB}$	Collector Emitter Capacitance	$I_C = 0 \quad V_{EB} = 0.5 \text{ V} \quad f = 1 \text{ MHz}$		9		pF
NF	Noise Figure	$V_{CE} = 5 \text{ V} \quad I_C = 0.2 \text{ mA} \quad f = 1\text{KHz}$ $\Delta f = 200 \text{ Hz} \quad R_G = 2 \text{ K}\Omega$		2	10	dB
$h_{ie}^*$	Input Impedance	$V_{CE} = 5 \text{ V} \quad I_C = 2 \text{ mA} \quad f = 1\text{KHz}$	3.2	4.5	8.5	$\text{K}\Omega$
$h_{re}^*$	Reverse Voltage Ratio	$V_{CE} = 5 \text{ V} \quad I_C = 2 \text{ mA} \quad f = 1\text{KHz}$		2		$10^{-4}$
$h_{fe}^*$	Small Signal Current Gain	$V_{CE} = 5 \text{ V} \quad I_C = 2 \text{ mA} \quad f = 1\text{KHz}$		330		
$h_{oe}^*$	Output Admittance	$V_{CE} = 5 \text{ V} \quad I_C = 2 \text{ mA} \quad f = 1\text{KHz}$		30	60	$\mu\text{s}$

\* Pulsed: Pulse duration =  $300 \mu\text{s}$ , duty cycle  $\leq 2\%$

## SOT-23 MECHANICAL DATA

DIM.	mm			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	0.85		1.1	33.4		43.3
B	0.65		0.95	25.6		37.4
C	1.20		1.4	47.2		55.1
D	2.80		3	110.2		118
E	0.95		1.05	37.4		41.3
F	1.9		2.05	74.8		80.7
G	2.1		2.5	82.6		98.4
H	0.38		0.48	14.9		18.8
L	0.3		0.6	11.8		23.6
M	0		0.1	0		3.9
N	0.3		0.65	11.8		25.6
O	0.09		0.17	3.5		6.7

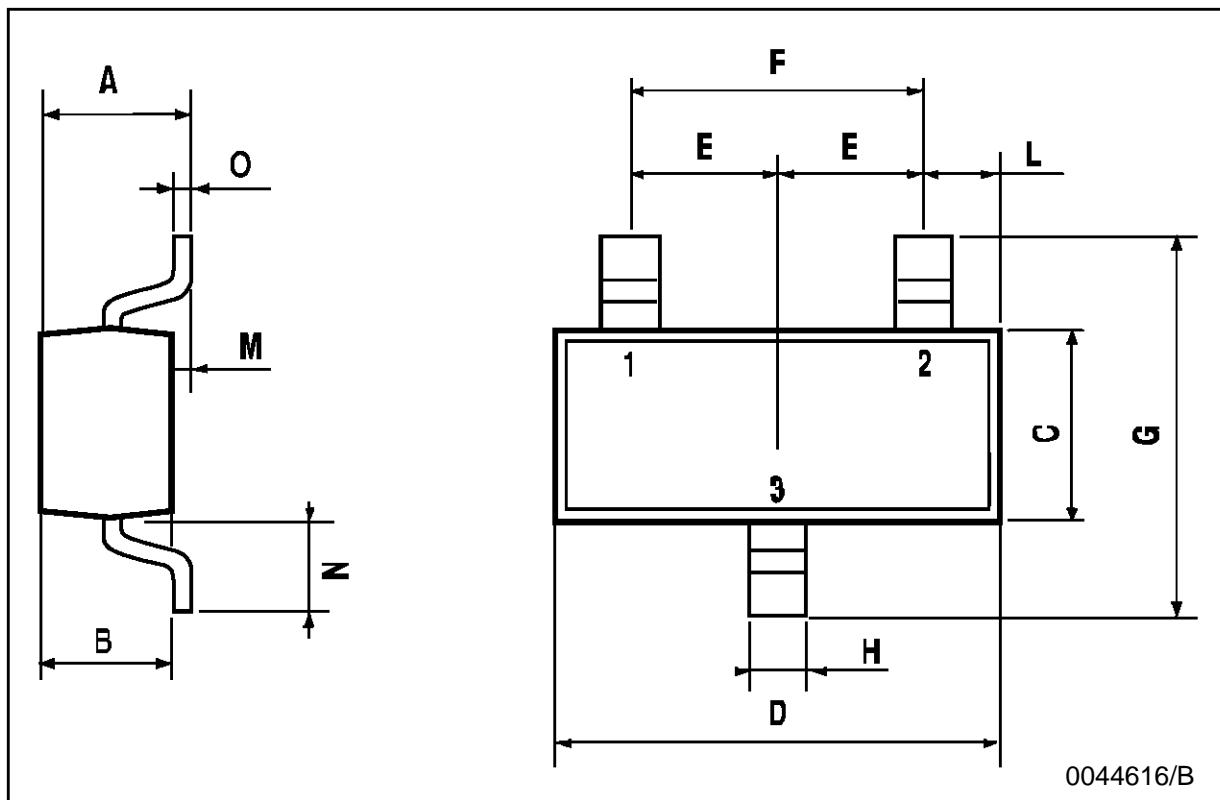

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A