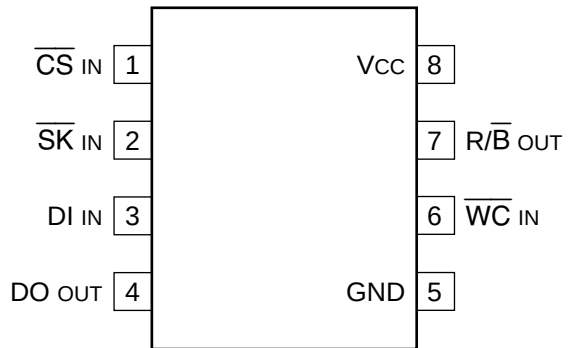


## C-MOS 4 K (256 × 16)-BIT SERIAL EEPROM

—TOP VIEW—

**INPUT** $\overline{CS}$  : CHIP SELECT

DI : OPERATING CODE, ADDRESS, AND SERIAL DATA

 $\overline{SK}$  : SERIAL DATA CLOCK $\overline{WC}$  : WRITE CONTROL**OUTPUT**

DO : SERIAL DATA

 $\overline{R/B}$  : READY/BUSY STATUS SIGNAL