



# FR601G THRU FR607G

GLASS PASSIVATED JUNCTION FAST SWITCHING RECTIFIER


Reverse Voltage - 50 to 1000 Volts

Forward Current - 6.0 Amperes

## Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing Flame retardant epoxy molding compound
- Glass passivated junction in R-6 package
- 6.0 ampere operation at  $T_A=75^\circ\text{C}$  with no thermal runaway
- Fast switching for high efficiency

R-6

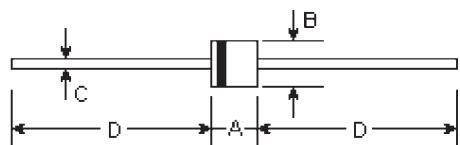

## Mechanical Data

- **Case:** Molded plastic, R-6
- **Terminals:** Axial leads, solderable per MIL-STD-202, method 208
- **Polarity:** Band denotes cathode
- **Mounting Position:** Any
- **Weight:** 0.074 ounce, 2.105 grams

DIM	DIMENSIONS				Note	
	inches		mm			
	Min.	Max.	Min.	Max.		
A	0.339	0.358	8.6	9.1		
B	0.339	0.358	8.6	9.1	Φ	
C	0.047	0.052	1.2	1.3	Φ	
D	1.000	-	25.40	-		

## Maximum Ratings and Electrical Characteristics $\text{@}25^\circ\text{C}$ unless otherwise specified

	Symbols	FR 601G	FR 602G	FR 603G	FR 604G	FR 605G	FR 606G	FR 607G	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Average forward rectified current at $T_A=75^\circ\text{C}$	$I_{(AV)}$				6.0				Amps
Peak forward surge current 8.3mS single half sine-wave	$I_{FSM}$					300.0			Amps
Maximum instantaneous forward voltage $I_{FM}=6.0\text{A}; T_A=25^\circ\text{C}$ (Note 1)	$V_F$				1.3				Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=55^\circ\text{C}$	$I_R$				10.0	150.0			$\mu\text{A}$
Maximum reverse recovery time at $I_F=0.5\text{A}, I_R=1.0\text{A}, I_n=0.25\text{A}$	$T_{rr}$			150		250	500		nS
Typical junction capacitance Measured at 1.0MHz, $V_R=4.0\text{V}$	$C_J$				150				$\text{pF}$
Operating and storage temperature range	$T_J, T_{STG}$				-65 to +150				$^\circ\text{C}$

Note:


(1) Pulse test: Pulse width 300uSec, Duty cycle 1%

---

## RATINGS AND CHARACTERISTIC CURVES


---

Figure 1  
Typical Forward Characteristics

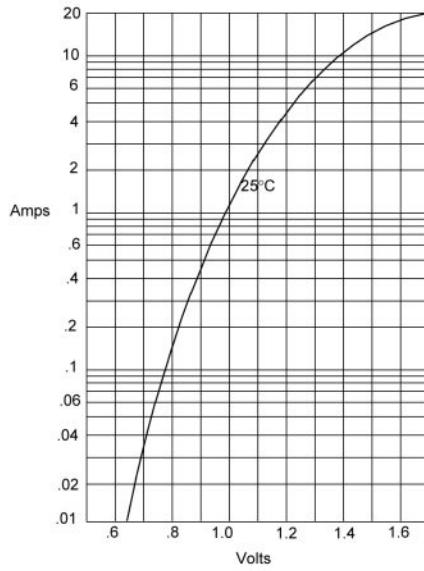


Instantaneous Forward Current - Amperes *versus*  
Instantaneous Forward Voltage - Volts

Figure 2  
Forward Derating Curve

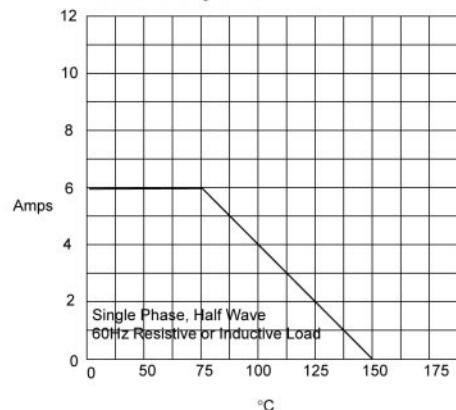

Average Forward Rectified Current - Amperes *versus*  
Ambient Temperature - °C

Figure 3  
Junction Capacitance

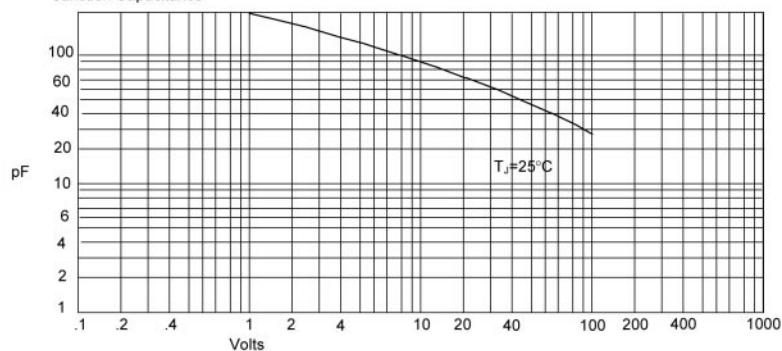

Junction Capacitance - pF *versus*  
Reverse Voltage - Volts

---

## RATINGS AND CHARACTERISTIC CURVES

---

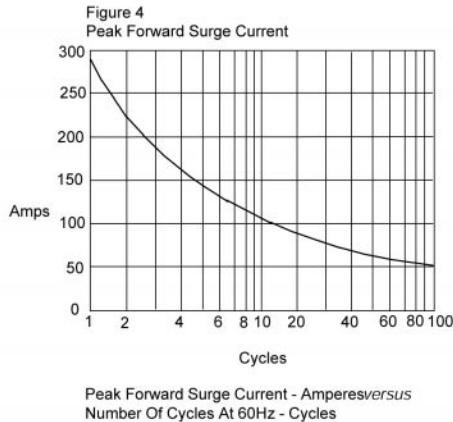


Figure 5  
Reverse Recovery Time Characteristic And Test Circuit Diagram

