



Siemens Matsushita Components

SAW Components

IF Filter for Intercarrier Applications

G 1962 M
38,90 MHz

Data Sheet
Standard

Plastic package **SIP5K**


- B/G

Features

- TV IF filter with Nyquist slope and sound shelf
- Reduced group delay distortion as compared with standard B/G, half
- Suitable for CENELEC EN 55020

Terminals


- Tinned CuFe alloy

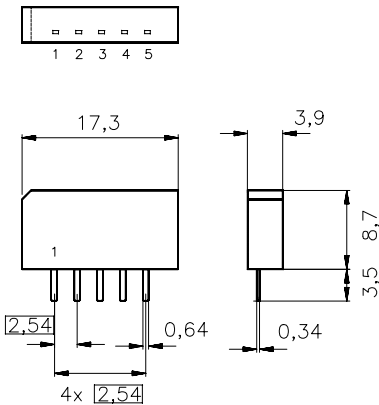

Dimensions in mm, approx. weight 1,0 g

Pin configuration

- | | |
|---|-----------------------|
| 1 | Input |
| 2 | Input - ground |
| 3 | Chip carrier - ground |
| 4 | Output |
| 5 | Output |



Type	Ordering code	Marking and package according to	Packing according to
G 1962 M	B39389-G1962-M100	C61157-A1-A15	F61074-V8067-Z000

Maximum ratings

Operable temperature range	T_A	- 25/+ 65	°C	
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	12	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals



Siemens Matsushita Components

SAW Components

IF Filter for Inter-carrier Applications

G 1962 M
38,90 MHz

Data Sheet

Characteristics

Reference temperature: $T_A = 25\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
Insertion attenuation α					
Reference level for the following data	37,40 MHz	13,5	15,1	16,5	dB
Relative attenuation α_{rel}					
Picture carrier	38,90 MHz	4,9	5,9	6,9	dB
Color carrier	34,47 MHz	1,3	2,3	3,3	dB
Sound carrier	33,40 MHz	18,5	19,5	20,5	dB
Adjacent picture carrier UHF	30,90 MHz	46,0	52,0	—	dB
VHF	31,90 MHz	48,0	54,0	—	dB
	31,40 MHz	46,0	52,0	—	dB
	32,40 MHz	48,0	56,0	—	dB
	40,15 MHz	42,0	49,0	—	dB
Adjacent sound carrier VHF	40,40 MHz	46,0	58,0	—	dB
UHF	41,40 MHz	42,0	52,0	—	dB
Lower sidelobe	25,00 ... 31,40 MHz	42,0	47,0	—	dB
Upper sidelobe	40,40 ... 45,00 MHz	38,0	43,0	—	dB
Reflected wave signal suppression					
1,3 μs ... 6,0 μs after main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		44,0	54,0	—	dB
Feedthrough signal suppression					
1,3 μs ... 1,2 μs before main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		50,0	56,0	—	dB
Group delay predistortion $\Delta\tau$ (reference frequency 38,90 MHz)					
	36,90 MHz	—	-70	—	ns
	34,47 MHz	—	30	—	ns
Impedance at 37,40 MHz					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	2,2 $\parallel$ 13,3	—	k Ω $\parallel$ pF
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1,4 $\parallel$ 4,7	—	k Ω $\parallel$ pF
Temperature coefficient of frequency TC_f		—	-72	—	ppm/K



Siemens Matsushita Components



SAW Components

IF Filter for Inter-carrier Applications

G 1962 M
38,90 MHz

Data Sheet

Frequency response

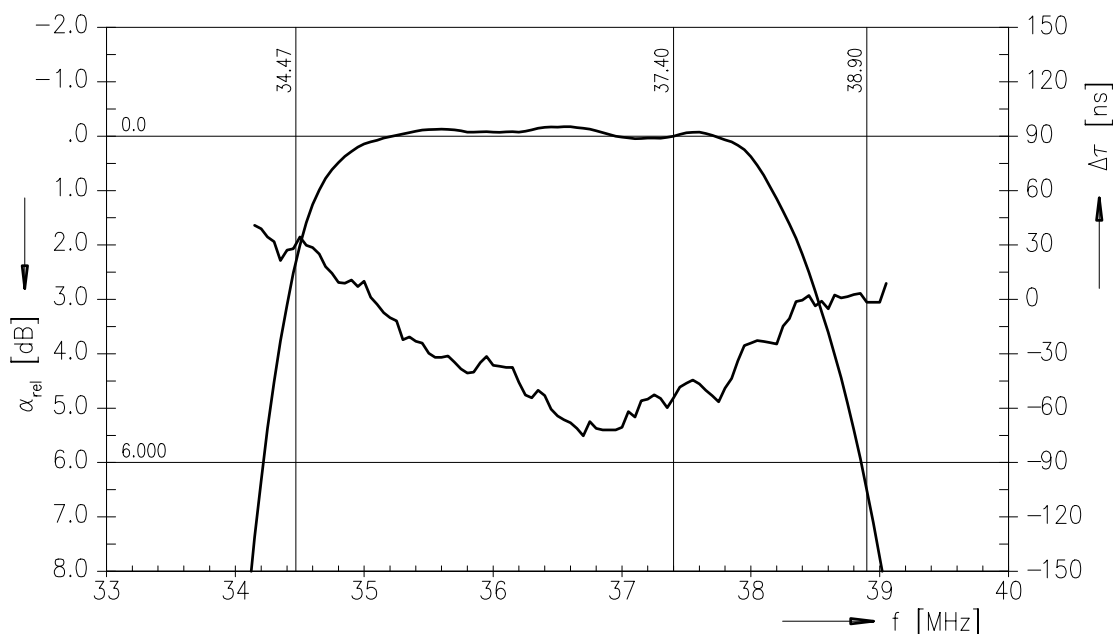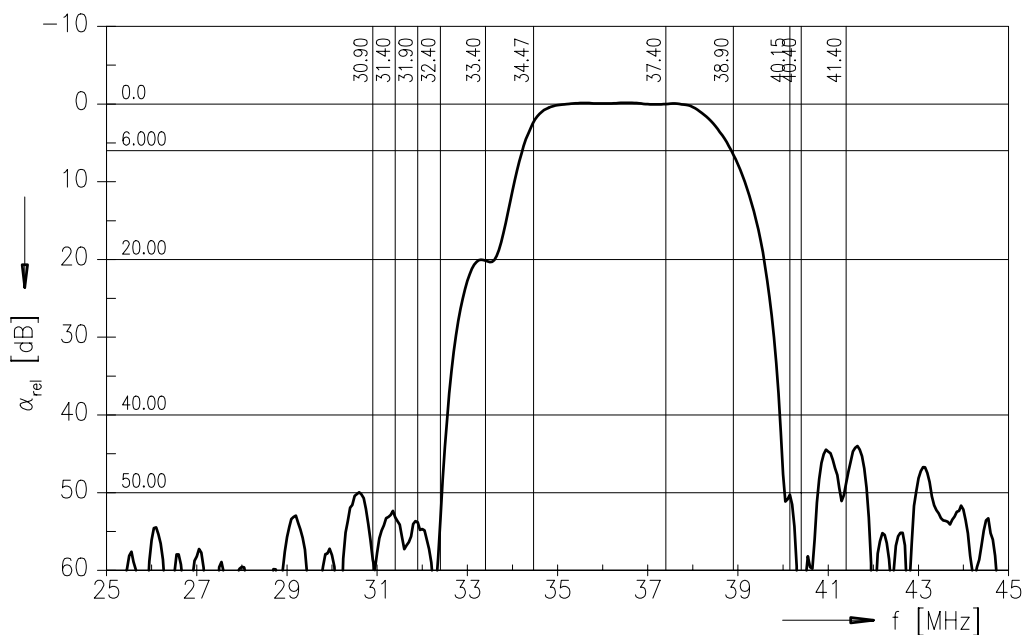




Siemens Matsushita Components

SAW Components IF Filter for Inter-carrier Applications

G 1962 M
38,90 MHz

Data Sheet

Frequency response

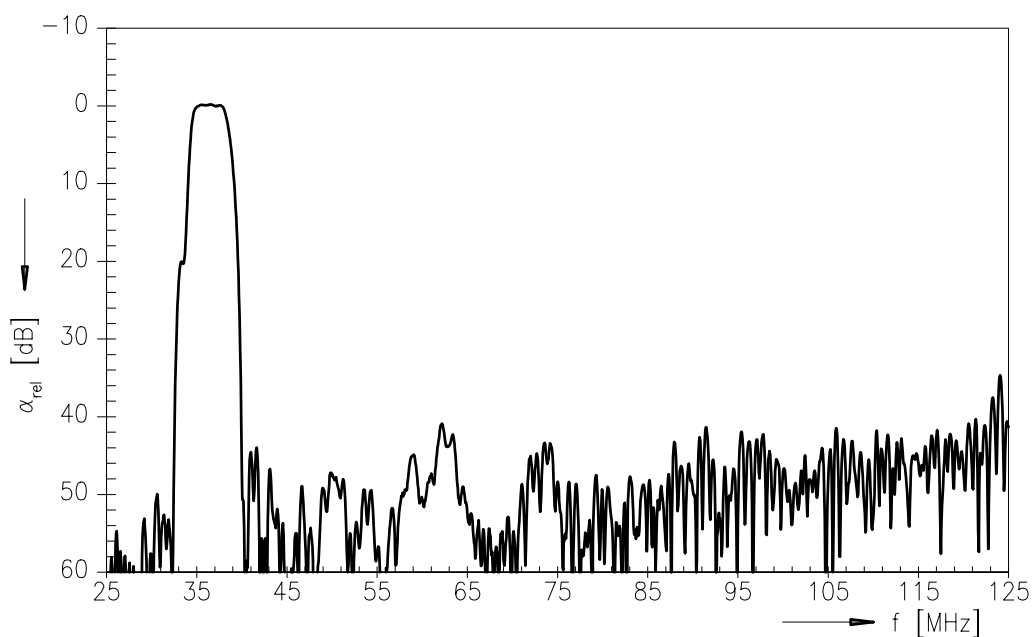

Time domain response

