

# GP600FHB16S

## POWERLINE N-CHANNEL IGBT MODULE

### APPLICATIONS

- High Power Switching.
- Motor Control.
- UPS.
- AC And DC Servo Drive Amplifiers.

### FEATURES

- n - Channel.
- Enhancement Mode.
- High Input Impedance.
- High Switching Speed.
- Latch-Free Operation.
- Low Forward Voltage Drop.
- Isolated Base.
- Short Circuit Capability (10μs).

### CIRCUIT

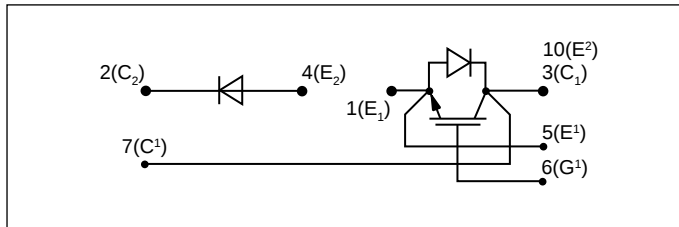


Fig.1 Chopper circuit diagram

### RATINGS

| $T_{case} = 25^{\circ}C$ unless stated otherwise. |                           |                                                          |      |       |
|---------------------------------------------------|---------------------------|----------------------------------------------------------|------|-------|
| Symbol                                            | Parameter                 | Test Conditions                                          | Max. | Units |
| $V_{CES}$                                         | Collector-emitter voltage | $V_{GE} = 0V$                                            | 1600 | V     |
| $V_{GES}$                                         | Gate-emitter voltage      | -                                                        | ±20  | V     |
| $I_C$                                             | Collector current         | DC, $T_{case} = 75^{\circ}C$                             | 600  | A     |
| $I_{C(PK)}$                                       |                           | 1ms, $T_{case} = 75^{\circ}C$                            | 1200 | A     |
| $P_{max}$                                         | Maximum power dissipation | Per arm                                                  | 5000 | W     |
| $V_{isol}$                                        | Isolation voltage         | Commoned terminals to base plate.<br>AC RMS, 1 min, 50Hz | 2500 | V     |

### TYPICAL KEY PARAMETERS

|               |       |
|---------------|-------|
| $V_{CES}$     | 1600V |
| $V_{CE(sat)}$ | 3.3V  |
| $I_{C(CONT)}$ | 600A  |
| $I_{C(PK)}$   | 1200A |
| $t_r$         | 270ns |
| $t_f$         | 590ns |

### PACKAGE OUTLINE

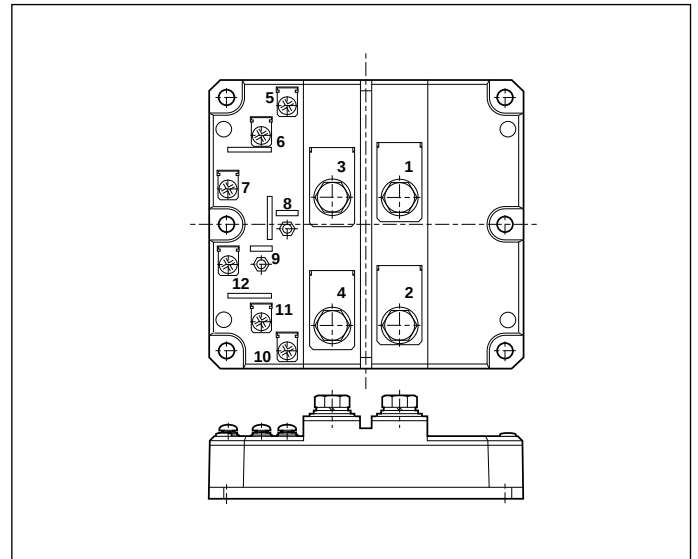


Fig.2

Outline type code: F. See package details for further information.

THERMAL AND MECHANICAL RATINGS

| Symbol        | Parameter                             | Conditions                                 | Min. | Max.  | Units |
|---------------|---------------------------------------|--------------------------------------------|------|-------|-------|
| $R_{th(j-c)}$ | Thermal resistance                    | DC junction to case per arm                | -    | 0.025 | °C/W  |
| $R_{th(c-h)}$ | Thermal resistance - Case to heatsink | Mounting torque 5Nm (with mounting grease) | -    | 0.004 | °C/W  |
| $T_j$         | Junction temperature                  | -                                          | -    | 150   | °C    |
| $T_{stg}$     | Storage temperature range             | -                                          | -40  | 150   | °C    |
| -             | Screw torque (mounting)               | -                                          | -    | 6.0   | Nm    |

DC ELECTRICAL CHARACTERISTICS

| $T_{case} = 25^{\circ}C$ unless stated otherwise. |                                      |                                                     |      |      |         |         |
|---------------------------------------------------|--------------------------------------|-----------------------------------------------------|------|------|---------|---------|
| Symbol                                            | Parameter                            | Conditions                                          | Min. | Typ. | Max.    | Units   |
| $I_{CES}$                                         | Collector cut-off current            | $V_{GE} = 0V, V_{CE} = V_{CES}$                     | -    | -    | 25      | mA      |
| $I_{GES}$                                         | Gate leakage current                 | $V_{GE} = \pm 20V$                                  | -    | -    | $\pm 4$ | $\mu A$ |
| $V_{GE(TH)}$                                      | Gate threshold voltage               | $I_C = 40mA, V_{GE} = V_{CE}$                       | 4    | -    | 7.5     | V       |
| $V_{CE(SAT)}$                                     | Collector-emitter saturation voltage | $V_{GE} = 15V, I_C = 600A$                          | -    | 3.3  | 4.1     | V       |
|                                                   |                                      | $V_{GE} = 15V, I_C = 600A, T_{case} = 125^{\circ}C$ | -    | 4.1  | 5.1     | V       |

DIODE DC CHARACTERISTICS

| $T_{case} = 25^{\circ}C$ unless stated otherwise. |                               |                                     |      |      |       |       |
|---------------------------------------------------|-------------------------------|-------------------------------------|------|------|-------|-------|
| Symbol                                            | Parameter                     | Conditions                          | Min. | Typ. | Max.  | Units |
| $I_F$                                             | Diode forward current         | DC, $T_{case} = 75^{\circ}C$        | -    | -    | 400   | A     |
| $I_{FM}$                                          | Diode maximum forward current | $T_{case} = 75^{\circ}C, t_p = 1ms$ | -    | -    | 1200  | A     |
| $V_F$                                             | Diode forward voltage         | $I_F = 600A$                        | -    | 2.4  | 2.8   | V     |
| $R_{th(j-c)}$                                     | Thermal resistance            | DC junction to case per arm         | -    | -    | 0.085 | °C/W  |

AC ELECTRICAL CHARACTERISTICS

| Symbol    | Parameter                    | Conditions                            | Min. | Typ.  | Max. | Units |
|-----------|------------------------------|---------------------------------------|------|-------|------|-------|
| $C_{ies}$ | Input capacitance            | $V_{CE} = 25V, V_{GE} = 0V, f = 1MHz$ | -    | 96000 | -    | pF    |
| $C_{oes}$ | Output capacitance           | $V_{CE} = 25V, V_{GE} = 0V, f = 1MHz$ | -    | 4800  | -    | pF    |
| $C_{res}$ | Reverse transfer capacitance | $V_{CE} = 25V, V_{GE} = 0V, f = 1MHz$ | -    | 4800  | -    | pF    |

## INDUCTIVE SWITCHING CHARACTERISTICS

For definition of switching waveforms, refer to figures 6 and 7 shown in application note AN4504 IGBT Ratings and Characteristics.

| $T_{\text{case}} = 125^{\circ}\text{C}$ unless stated otherwise. |                      |                                                                                                                                                                    |      |      |      |       |
|------------------------------------------------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|-------|
| Symbol                                                           | Parameter            | Conditions                                                                                                                                                         | Min. | Typ. | Max. | Units |
| $t_{\text{d(off)}}$                                              | Turn-off delay time  | $I_{\text{C}} = 600\text{A},$<br>$V_{\text{GE}} = \pm 15\text{V},$<br>$V_{\text{CE}} = 50\% V_{\text{CES}},$<br>$R_{\text{G(ON)}} = R_{\text{G(OFF)}} = 0.8\Omega$ | -    | 550  | -    | ns    |
| $t_{\text{f}}$                                                   | Fall time            |                                                                                                                                                                    | -    | 590  | -    | ns    |
| $E_{\text{OFF}}$                                                 | Turn-off energy loss |                                                                                                                                                                    | -    | 160  | -    | mJ    |
| $t_{\text{d(on)}}$                                               | Turn-on delay time   |                                                                                                                                                                    | -    | 790  | -    | ns    |
| $t_{\text{r}}$                                                   | Rise time            |                                                                                                                                                                    | -    | 270  | -    | ns    |
| $E_{\text{ON}}$                                                  | Turn-on energy loss  |                                                                                                                                                                    | -    | 344  | -    | mJ    |

## DIODE DYNAMIC CHARACTERISTICS (INDUCTIVE)

| $T_{\text{case}} = 125^{\circ}\text{C}$ unless stated otherwise. |                         |                                                                                                                                                         |      |      |      |               |
|------------------------------------------------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| Symbol                                                           | Parameter               | Conditions                                                                                                                                              | Min. | Typ. | Max. | Units         |
| $t_{\text{rr}}$                                                  | Reverse recovery time   | $T_{\text{case}} = 25^{\circ}\text{C}, I_{\text{F}} = 600\text{A}$<br>$V_{\text{R}} = 50\% V_{\text{CES}}, di_{\text{F}}/dt = 2400\text{A}/\mu\text{s}$ | -    | 270  | -    | ns            |
| $Q_{\text{rr}}$                                                  | Reverse recovery charge |                                                                                                                                                         | -    | 68   | -    | $\mu\text{C}$ |
| $t_{\text{rr}}$                                                  | Reverse recovery time   | $I_{\text{F}} = 600\text{A}$<br>$V_{\text{R}} = 50\% V_{\text{CES}}, di_{\text{F}}/dt = 2400\text{A}/\mu\text{s}$                                       | -    | 420  | -    | ns            |
| $Q_{\text{rr}}$                                                  | Reverse recovery charge |                                                                                                                                                         | -    | 123  | -    | $\mu\text{C}$ |

CURVES

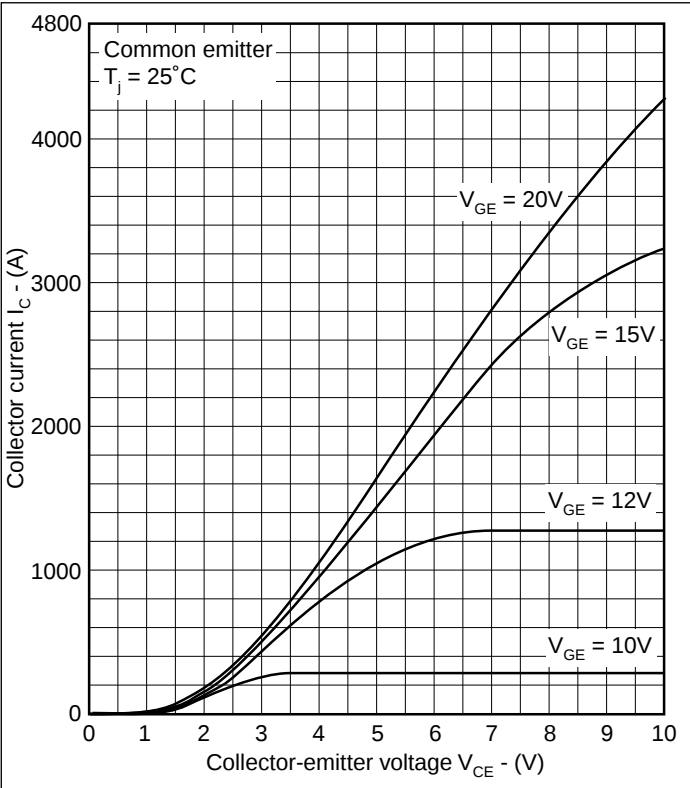


Fig.3 Typical output characteristics @ 25°C

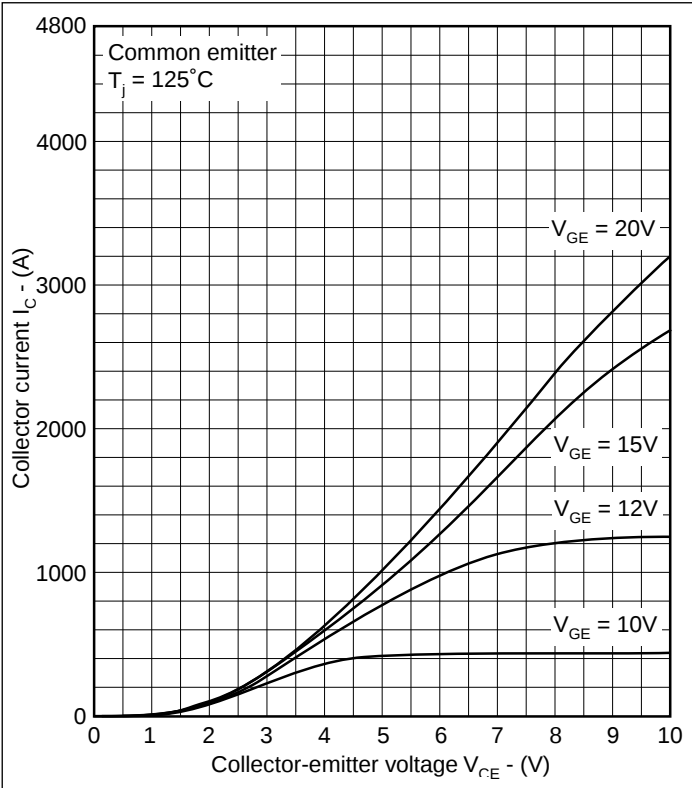


Fig.4 Typical output characteristics @ 125°C

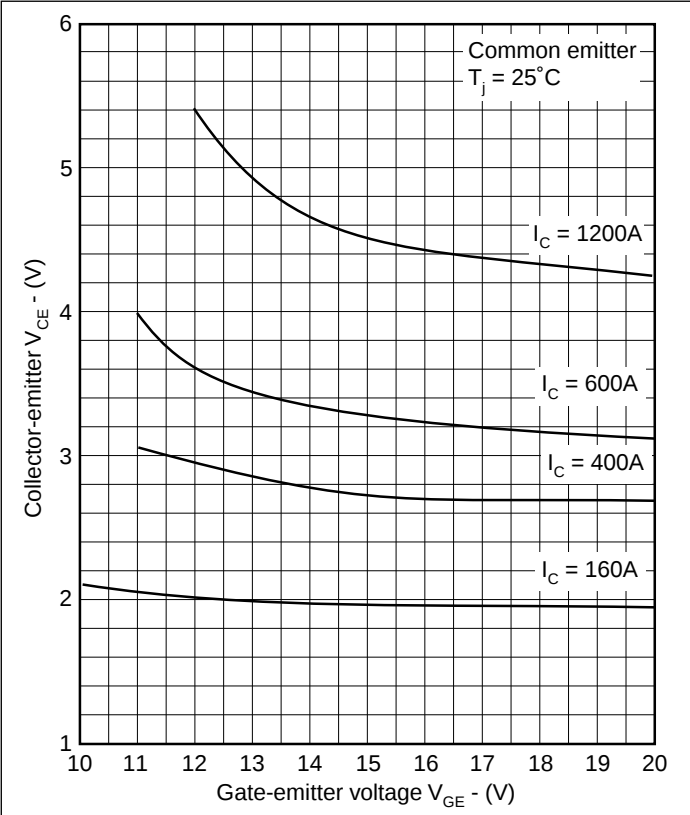


Fig.5 Typical transfer characteristics @ 25°C

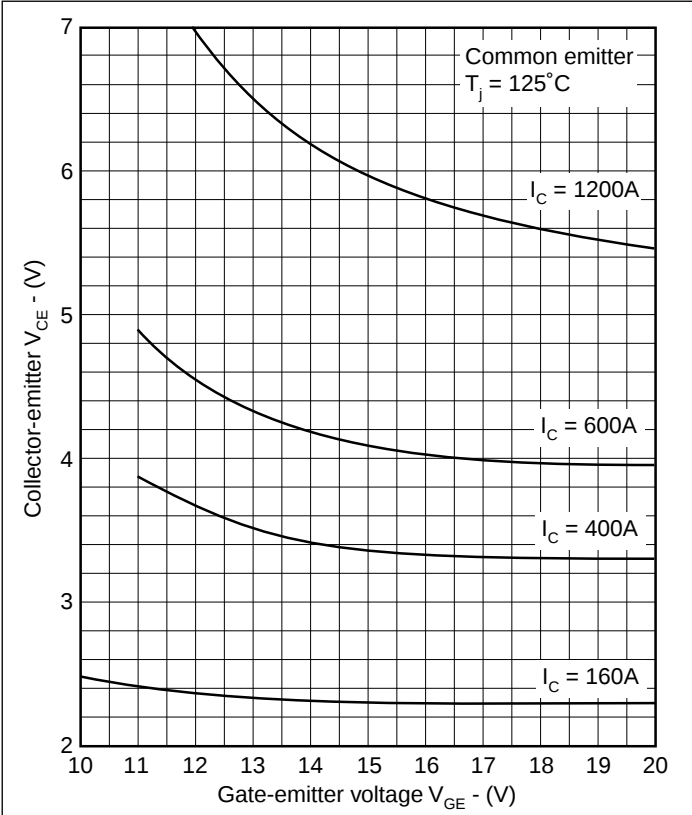


Fig.6 Typical transfer characteristics @ 125°C

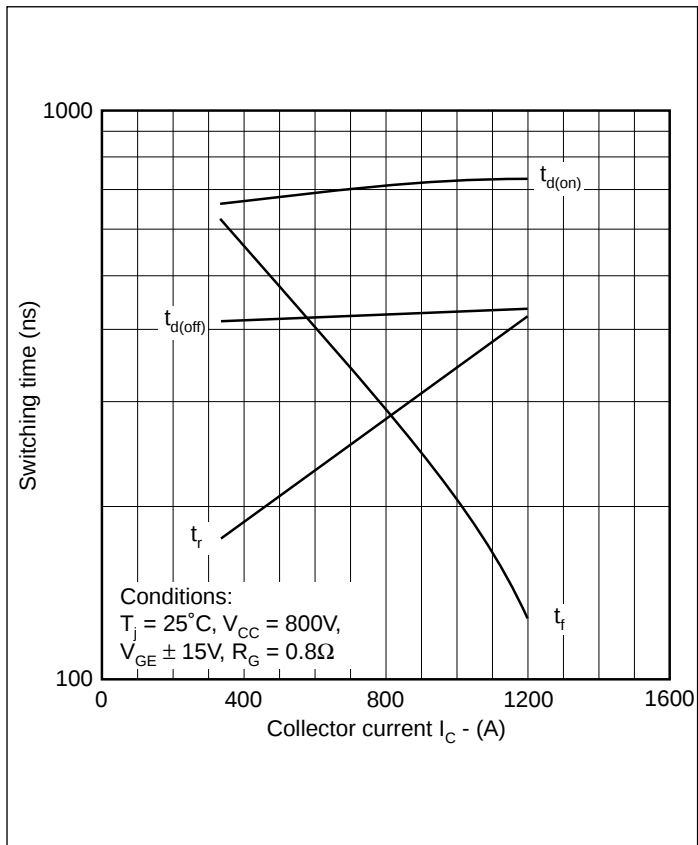
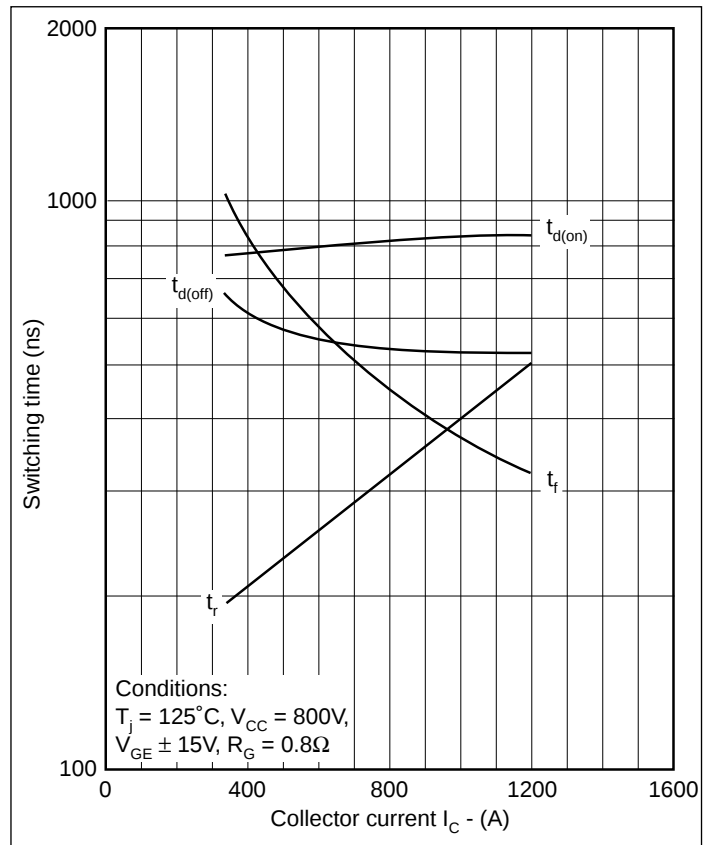
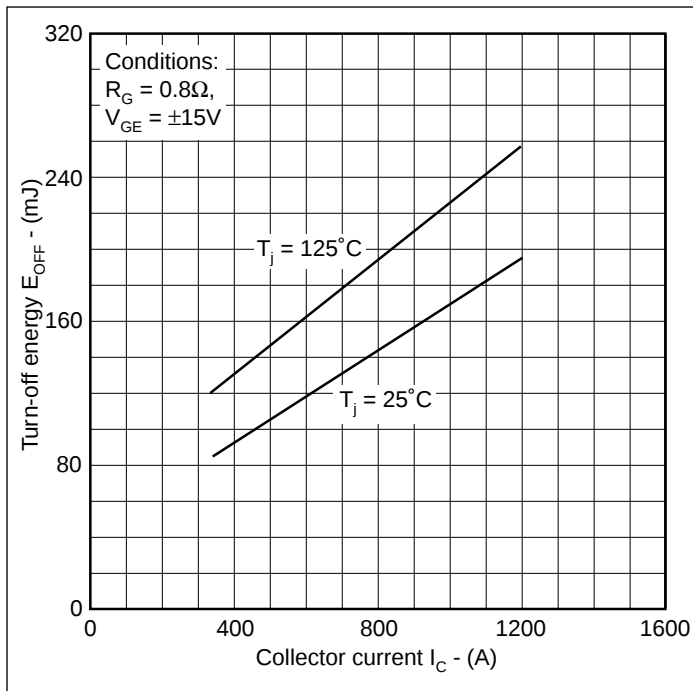
Fig.7 Typical switching time vs  $I_C$  @  $25^\circ\text{C}$ Fig.8 Typical switching time vs  $I_C$  @  $125^\circ\text{C}$ 

Fig.9 Typical turn-off losses

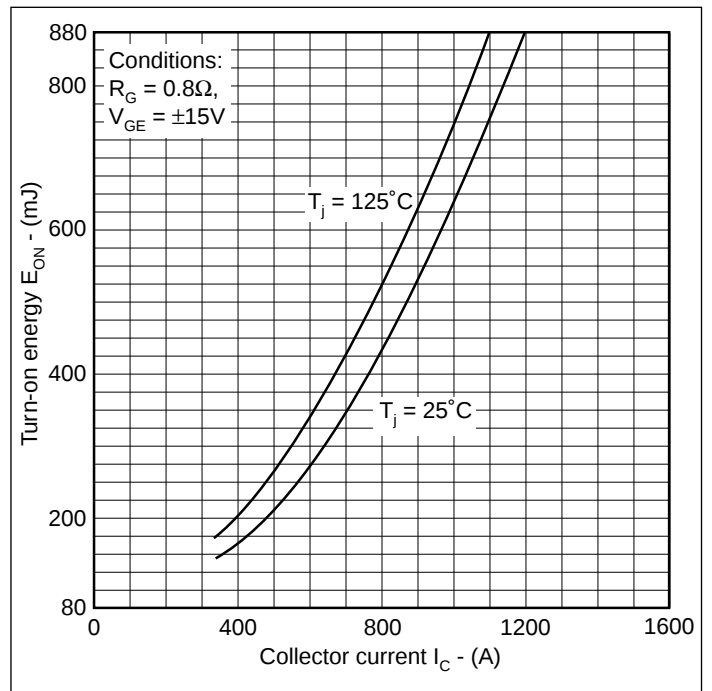


Fig.10 Typical turn-on losses

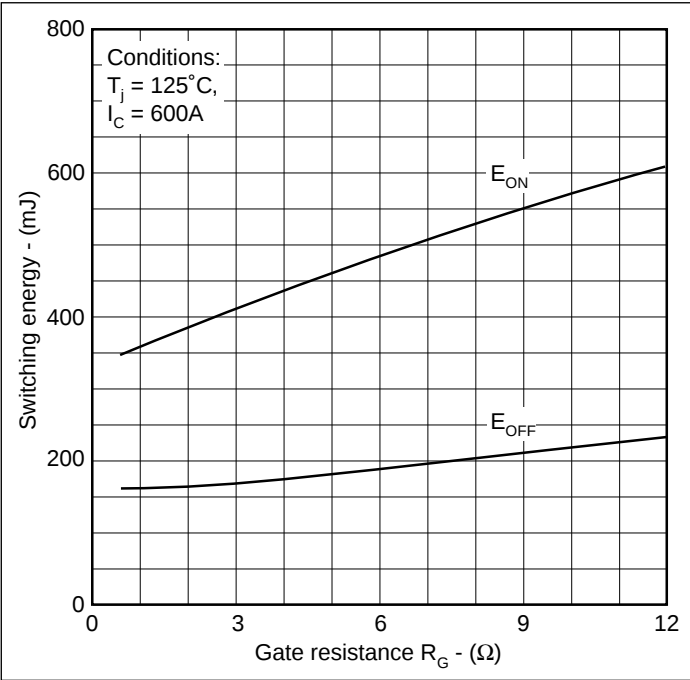


Fig.11 Typical switching energy @125°C

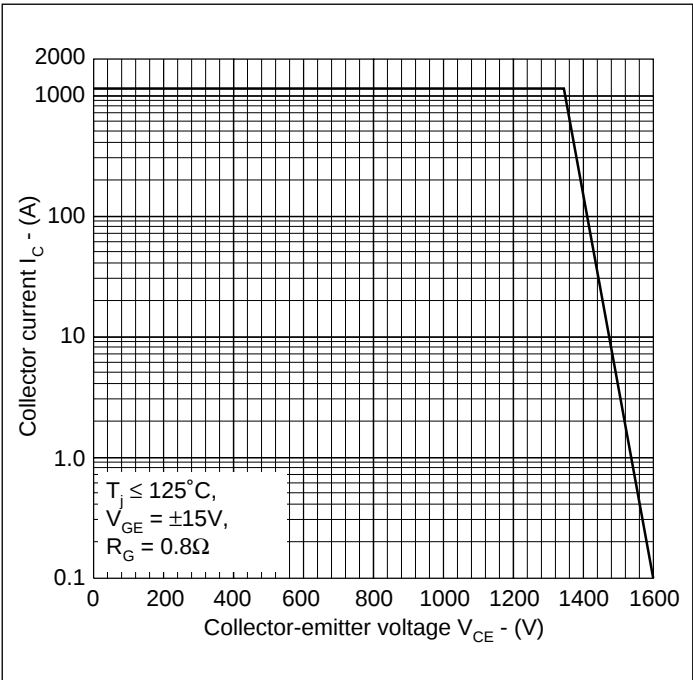


Fig.12 Reverse bias safe operating area

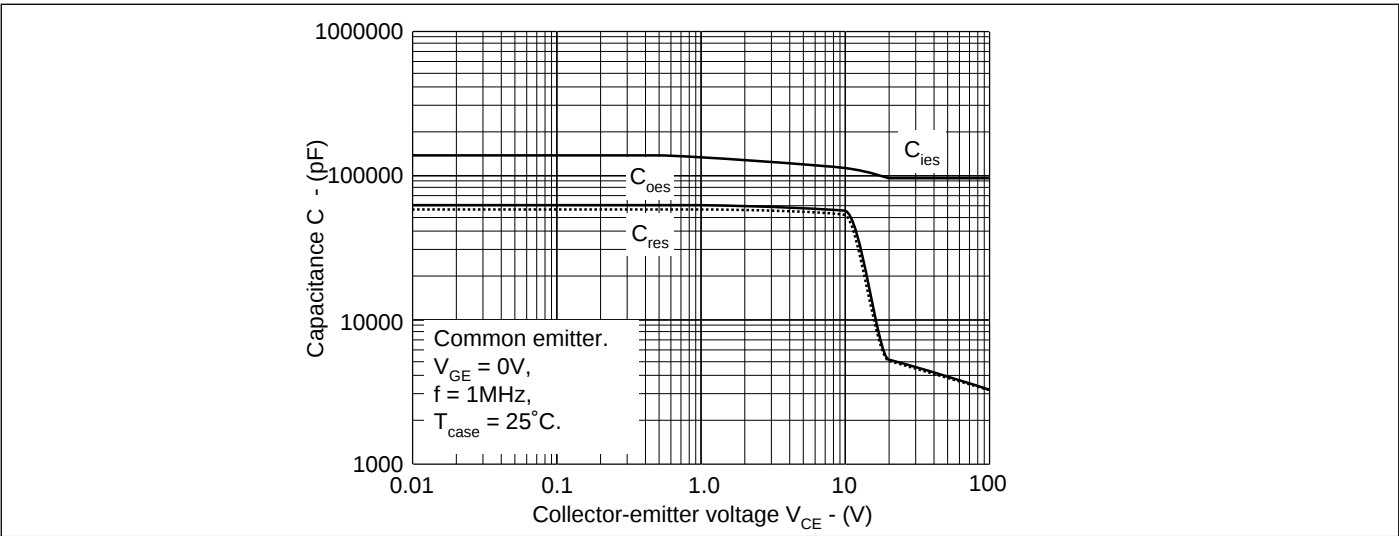


Fig.13 Typical capacitance

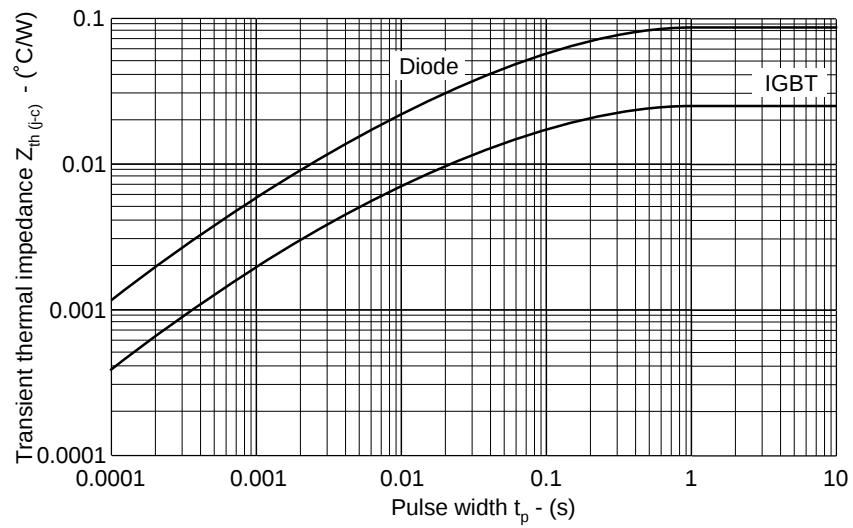


Fig.14 Transient thermal impedance


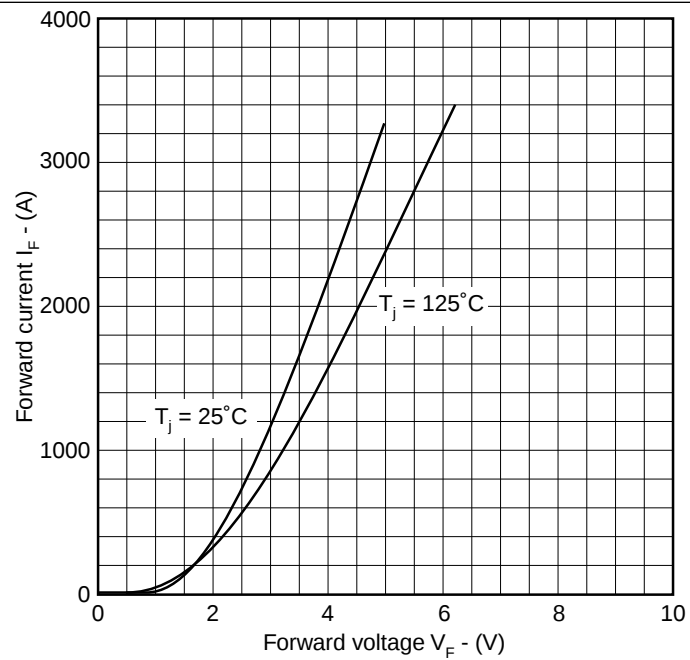


Fig.15 Typical diode forward characteristics

## PACKAGE DETAILS - F

For further package information, please contact your local Customer Service Centre. All dimensions in mm, unless stated otherwise. DO NOT SCALE.

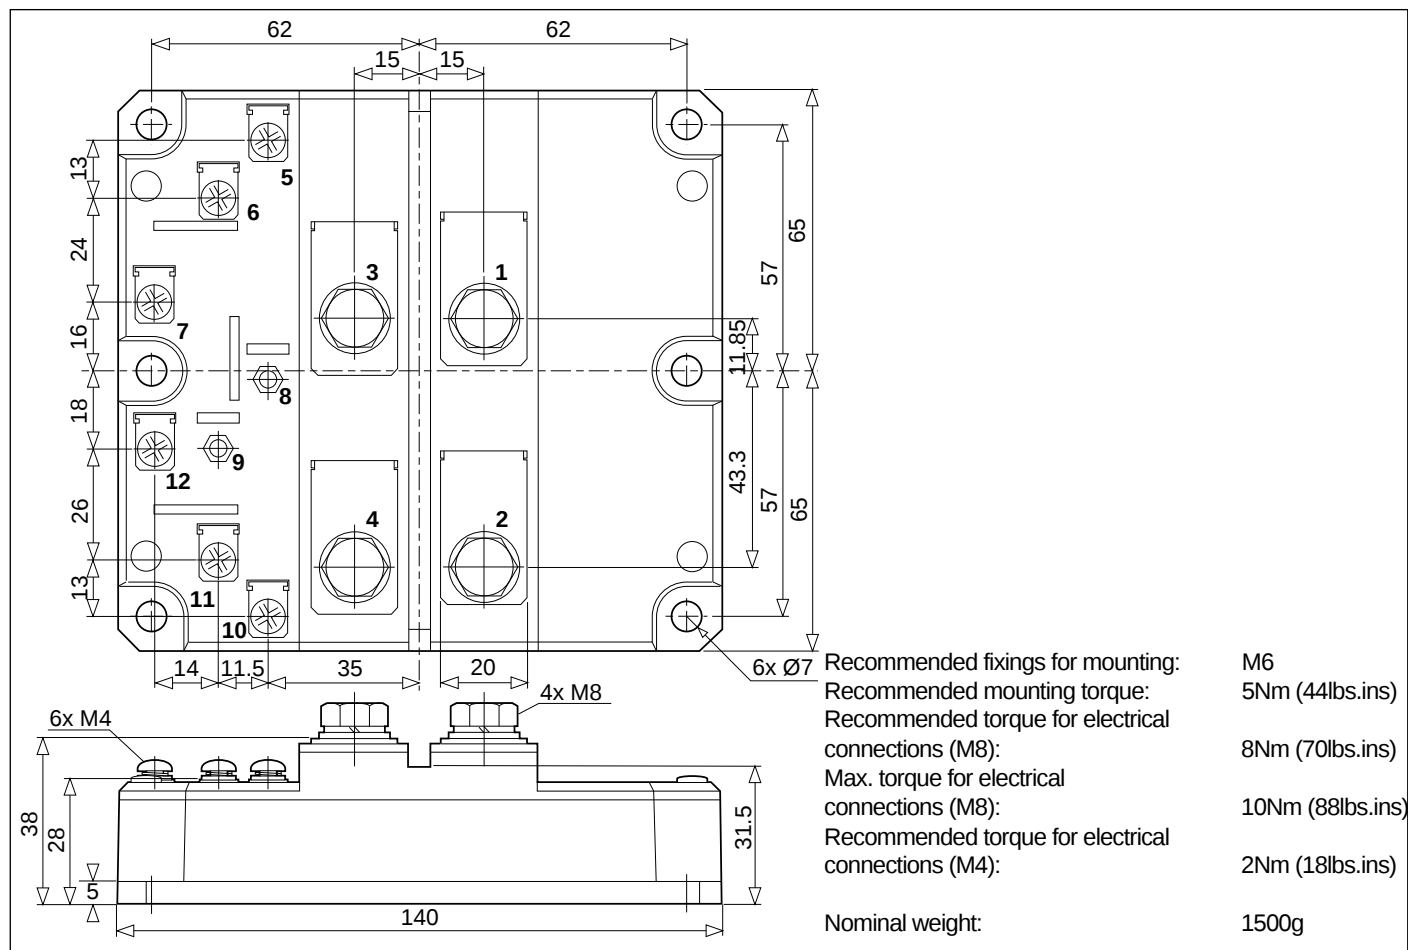

**GEC PLESSEY**  
SEMICONDUCTORS

## HEADQUARTERS OPERATIONS

## GEC PLESSEY SEMICONDUCTORS

Cheney Manor, Swindon,  
Wiltshire, SN2 2QW, United Kingdom.  
Tel: + 44 (0)1793 518000  
Fax: + 44 (0)1793 518411

## GEC PLESSEY SEMICONDUCTORS

P.O. Box 660017  
1500 Green Hills Road,  
Scotts Valley, California 95067-0017,  
United States of America.  
Tel: + 1 (408) 438 2900  
Fax: + 1 (408) 438 5576

## POWER PRODUCT CUSTOMER SERVICE CENTRES

- **FRANCE.** 2 rue Henri-Bergson, 92665 Asnieres Cedex.  
Tel: + 33 1 40 80 54 00. Fax: + 33 1 40 80 55 87.
- **GERMANY.** Ungererstrasse 129, 80505 München.  
Tel: + 49 (0)89 36 09 060. Fax: + 49 (0)89 36 09 06 55.
- **NORTH AMERICA.** At Dedham Place, Suite 125, 3 Allied Drive, Dedham. MA 02026.  
Tel: + 1 617 251 0126. Fax: + 1 617 251 0106.
- **UNITED KINGDOM.** Doddington Road, Lincoln. LN6 3LF.  
Tel: + 44 (0)1522 500500. Fax: + 44 (0)1522 500550.

These are supported by Agents and Distributors in major countries world-wide.

© GEC Plessey Semiconductors 1996

Publication No. DS4545-1 Issue No. 1.1 July 1996 ADVANCE INFORMATION

TECHNICAL DOCUMENTATION - NOT FOR RESALE.

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.