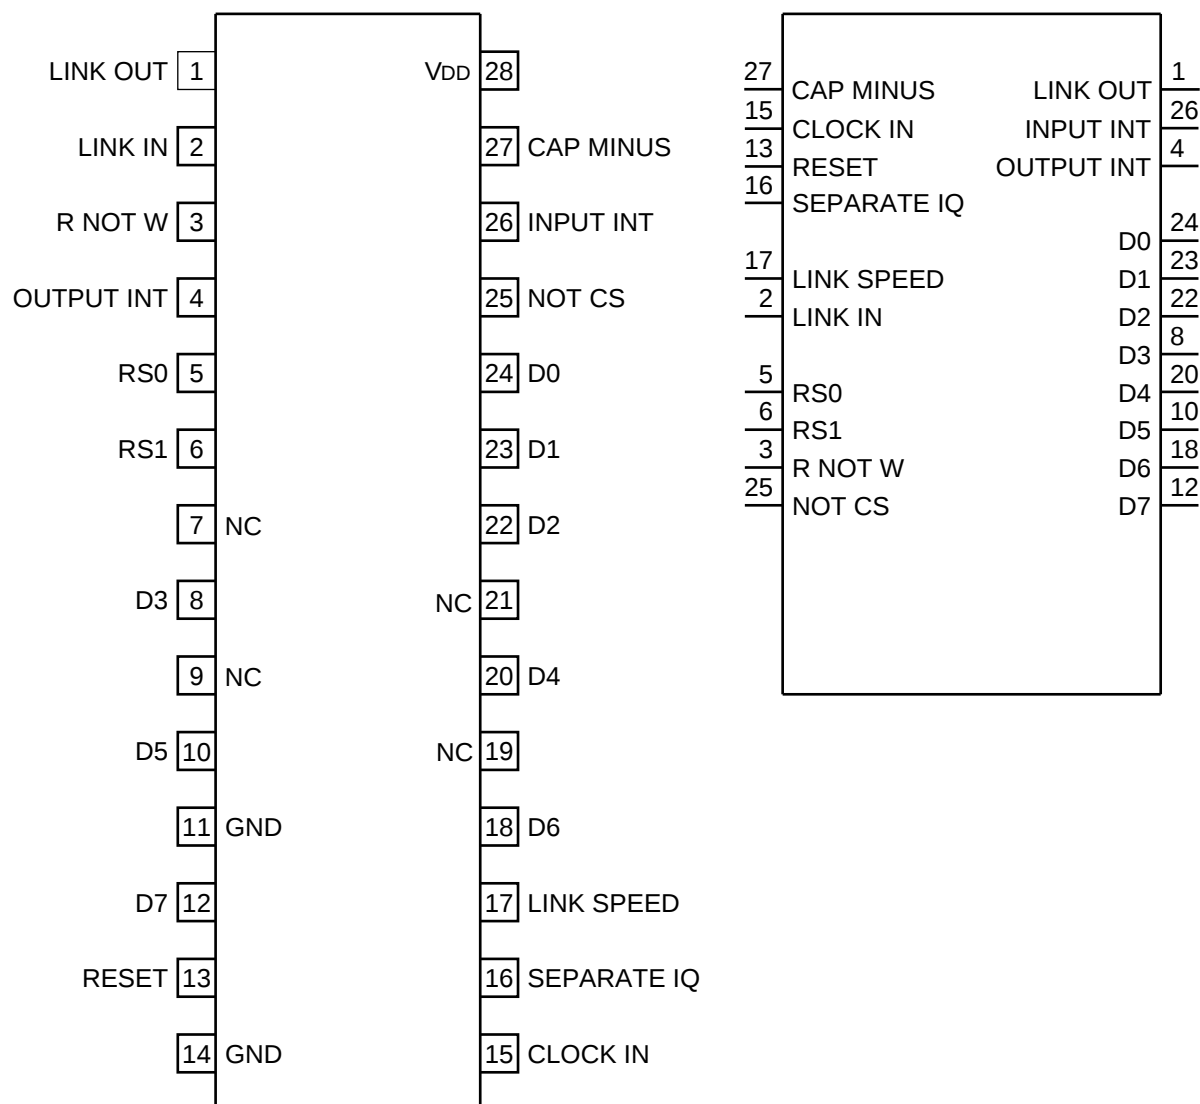

LINK ADAPTOR

- TOP VIEW -



INPUT

CAP MINUS ; EXTERNAL CAPACITOR FOR INTERNAL CLOCK POWER SUPPLY
 CLOCK IN ; CLOCK
 RESET ; SYSTEM RESET
 SEPARATE IQ ; SELECT MODE
 LINK IN ; SERIAL DATA
 LINK SPEED ; SELECT LINK SPEED
 RS0-1 ; REGISTER SELECT
 R NOT W ; READ/WRITE CONTROL SIGNAL
 NOT CS ; CHIP SELECT

OUTPUT

INPUT INT ; INTERRUPT ON LINK RECEIVE
 OUTPUT INT ; INTERRUPT ON LINK TRANSMIT
 D0-D7 ; B1-DIRECTIONAL DATA BUS
 LINK OUT ; SERIAL DATA

