

## Advanced Power MOSFET

## IRFS640A

### FEATURES


- Avalanche Rugged Technology
- Rugged Gate Oxide Technology
- Lower Input Capacitance
- Improved Gate Charge
- Extended Safe Operating Area
- Lower Leakage Current :  $10\mu\text{A}$  (Max.) @  $V_{DS} = 200\text{V}$
- Lower  $R_{DS(\text{ON})}$  :  $0.144\Omega$  (Typ. )

$BV_{DSS} = 200\text{ V}$

$R_{DS(\text{on})} = 0.18\Omega$

$I_D = 9.8\text{ A}$

TO-220F



1.Gate 2. Drain 3. Source

### Absolute Maximum Ratings

Symbol	Characteristic	Value	Units
$V_{DSS}$	Drain-to-Source Voltage	200	V
$I_D$	Continuous Drain Current ( $T_C=25\text{ }^\circ\text{C}$ )	9.8	A
	Continuous Drain Current ( $T_C=100\text{ }^\circ\text{C}$ )	6.2	
$I_{DM}$	Drain Current-Pulsed	① 72	A
$V_{GS}$	Gate-to-Source Voltage	$\pm 30$	V
$E_{AS}$	Single Pulsed Avalanche Energy	② 256	mJ
$I_{AR}$	Avalanche Current	① 9.8	A
$E_{AR}$	Repetitive Avalanche Energy	① 4.3	mJ
$dv/dt$	Peak Diode Recovery $dv/dt$	③ 5.0	V/ns
$P_D$	Total Power Dissipation ( $T_C=25\text{ }^\circ\text{C}$ )	43	W
	Linear Derating Factor	0.35	$\text{W}/^\circ\text{C}$
$T_J, T_{STG}$	Operating Junction and Storage Temperature Range	- 55 to +150	$^\circ\text{C}$
	Maximum Lead Temp. for Soldering Purposes, 1/8 " from case for 5-seconds	300	

### Thermal Resistance

Symbol	Characteristic	Typ.	Max.	Units
$R_{QJC}$	Junction-to-Case	--	2.89	$^\circ\text{C}/\text{W}$
	Junction-to-Ambient	--	62.5	

# IRFS640A

N-CHANNEL  
POWER MOSFET

## Electrical Characteristics ( $T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	200	--	--	V	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_D=250\mu\text{A}$
$\Delta \text{BV}/\Delta T_J$	Breakdown Voltage Temp. Coeff.	--	0.26	--	$\text{V}^\circ\text{C}$	$\text{I}_D=250\mu\text{A}$ See Fig 7
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.0	--	4.0	V	$\text{V}_{\text{DS}}=5\text{V}, \text{I}_D=250\mu\text{A}$
$\text{I}_{\text{GSS}}$	Gate-Source Leakage , Forward	--	--	100	nA	$\text{V}_{\text{GS}}=30\text{V}$
	Gate-Source Leakage , Reverse	--	--	-100		$\text{V}_{\text{GS}}=-30\text{V}$
$\text{I}_{\text{DSS}}$	Drain-to-Source Leakage Current	--	--	10	$\mu\text{A}$	$\text{V}_{\text{DS}}=200\text{V}$
		--	--	100		$\text{V}_{\text{DS}}=160\text{V}, \text{T}_C=125^\circ\text{C}$
$\text{R}_{\text{DS(on)}}$	Static Drain-Source On-State Resistance	--	--	0.18	$\Omega$	$\text{V}_{\text{GS}}=10\text{V}, \text{I}_D=4.9\text{A}$ ④
$\text{g}_{\text{fs}}$	Forward Transconductance	--	8.4	--	$\text{S}$	$\text{V}_{\text{DS}}=40\text{V}, \text{I}_D=4.9\text{A}$ ④
$\text{C}_{\text{iss}}$	Input Capacitance	--	1160	1500	pF	$\text{V}_{\text{GS}}=0\text{V}, \text{V}_{\text{DS}}=25\text{V}, f=1\text{MHz}$ See Fig 5
$\text{C}_{\text{oss}}$	Output Capacitance	--	210	250		
$\text{C}_{\text{rss}}$	Reverse Transfer Capacitance	--	94	110		
$t_{\text{d(on)}}$	Turn-On Delay Time	--	17	40	ns	$\text{V}_{\text{DD}}=100\text{V}, \text{I}_D=18\text{A}, \text{R}_G=9.1\Omega$ See Fig 13 ④ ⑤
$t_r$	Rise Time	--	16	40		
$t_{\text{d(off)}}$	Turn-Off Delay Time	--	48	110		
$t_f$	Fall Time	--	24	60		
$\text{Q}_g$	Total Gate Charge	--	44	58	nC	$\text{V}_{\text{DS}}=160\text{V}, \text{V}_{\text{GS}}=10\text{V}, \text{I}_D=18\text{A}$
$\text{Q}_{\text{gs}}$	Gate-Source Charge	--	10.4	--		See Fig 6 & Fig 12 ④ ⑤
$\text{Q}_{\text{gd}}$	Gate-Drain("Miller") Charge	--	27.1	--		

## Source-Drain Diode Ratings and Characteristics

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
$\text{I}_s$	Continuous Source Current	--	--	9.8	A	Integral reverse pn-diode in the MOSFET
$\text{I}_{\text{SM}}$	Pulsed-Source Current ①	--	--	72		
$\text{V}_{\text{SD}}$	Diode Forward Voltage ④	--	--	1.5	V	$\text{T}_J=25^\circ\text{C}, \text{I}_s=9.8\text{A}, \text{V}_{\text{GS}}=0\text{V}$
$\text{t}_{\text{rr}}$	Reverse Recovery Time	--	195	--	ns	$\text{T}_J=25^\circ\text{C}, \text{I}_F=18\text{A}$ $d\text{I}/dt=100\text{A}/\mu\text{s}$ ④
$\text{Q}_{\text{rr}}$	Reverse Recovery Charge	--	1.35	--		


### Notes :

- ① Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature
- ②  $L=4\text{mH}, \text{I}_{\text{AS}}=9.8\text{A}, \text{V}_{\text{DD}}=50\text{V}, \text{R}_G=2\Omega$ , Starting  $\text{T}_J=25^\circ\text{C}$
- ③  $\text{I}_{\text{SD}} \leq 18\text{A}, d\text{I}/dt \leq 260\text{A}/\mu\text{s}, \text{V}_{\text{DD}} \leq \text{BV}_{\text{DSS}}$ , Starting  $\text{T}_J=25^\circ\text{C}$
- ④ Pulse Test : Pulse Width =  $250\mu\text{s}$ , Duty Cycle  $\leq 2\%$
- ⑤ Essentially Independent of Operating Temperature


**N-CHANNEL  
POWER MOSFET**

**IRFS640A**


**Fig 1. Output Characteristics**

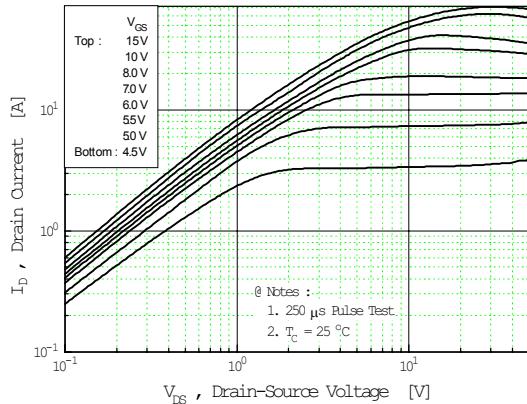


**Fig 2. Transfer Characteristics**

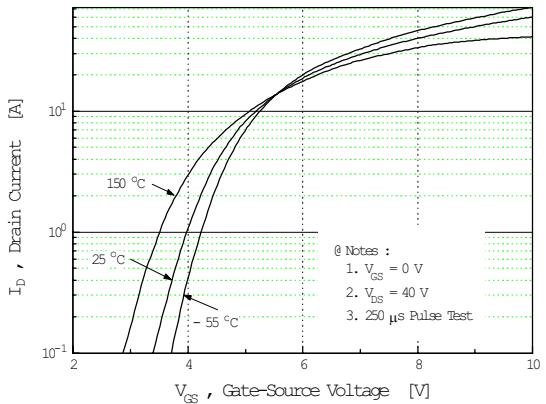


**Fig 3. On-Resistance vs. Drain Current**

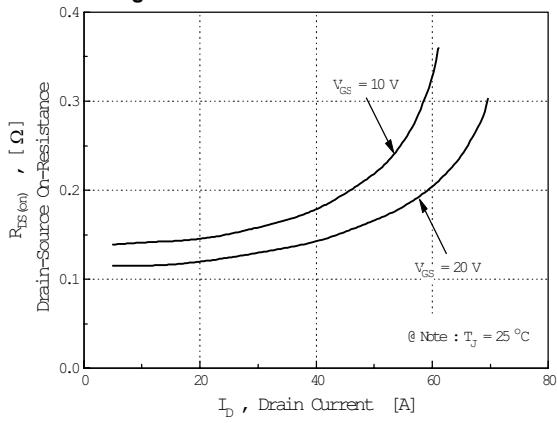


**Fig 4. Source-Drain Diode Forward Voltage**

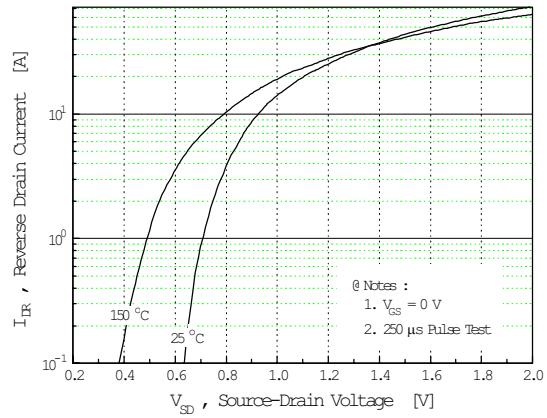

**Fig 5. Capacitance vs. Drain-Source Voltage**

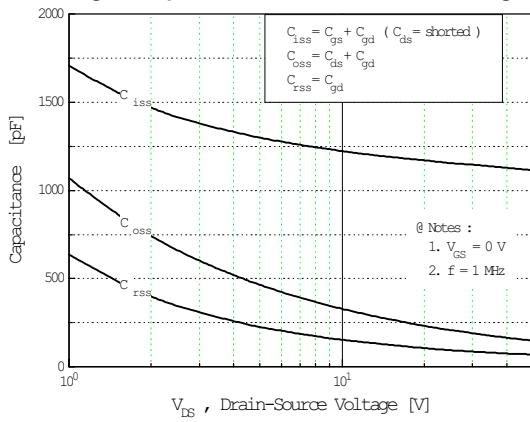


**Fig 6. Gate Charge vs. Gate-Source Voltage**

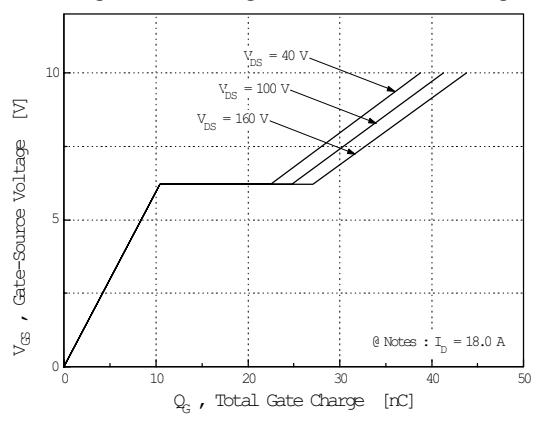


# IRFS640A

N-CHANNEL  
POWER MOSFET


**Fig 7. Breakdown Voltage vs. Temperature**

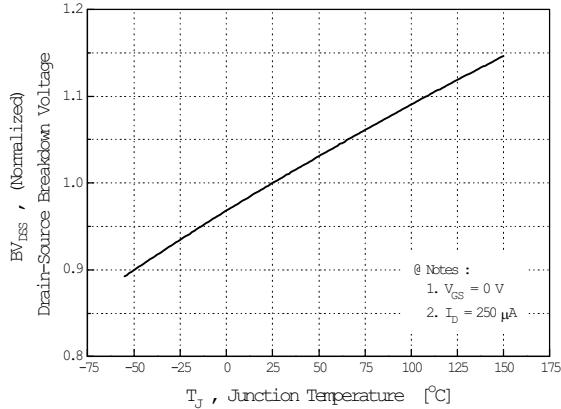


**Fig 8. On-Resistance vs. Temperature**

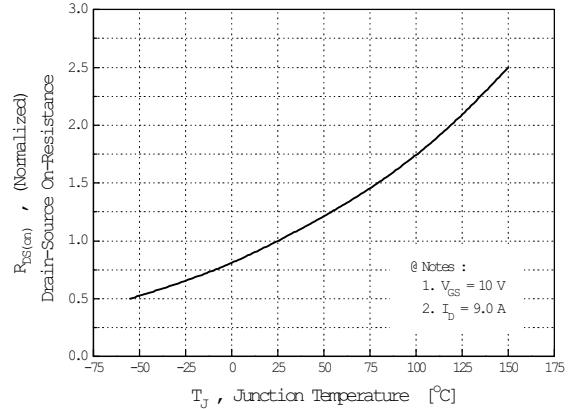


**Fig 9. Max. Safe Operating Area**

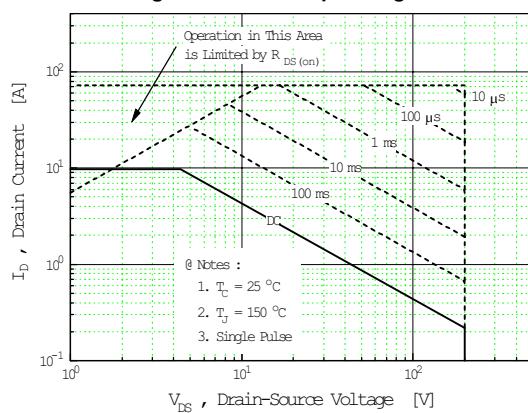


**Fig 10. Max. Drain Current vs. Case Temperature**

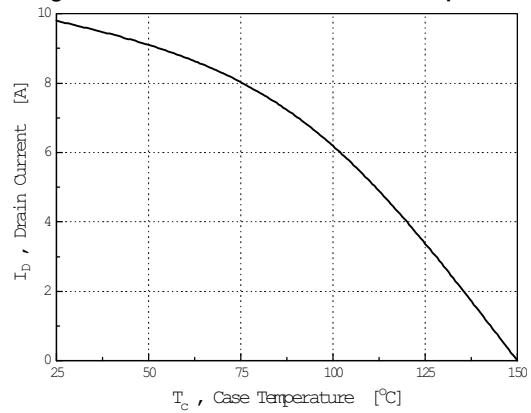


**Fig 11. Thermal Response**

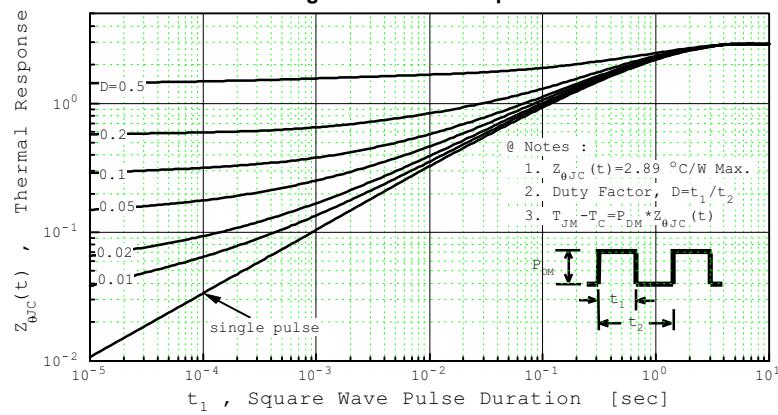


**Fig 12. Gate Charge Test Circuit & Waveform**

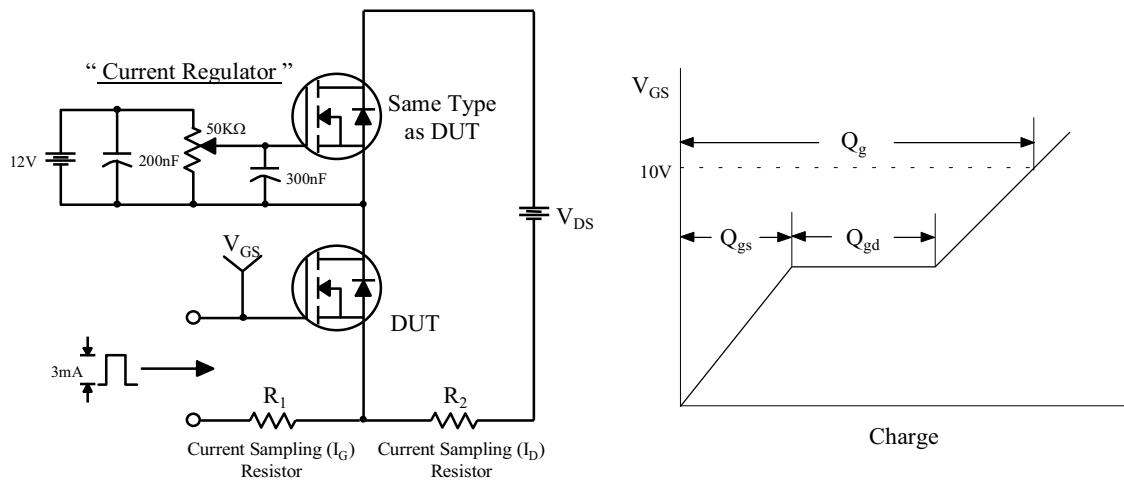

**Fig 13. Resistive Switching Test Circuit & Waveforms**

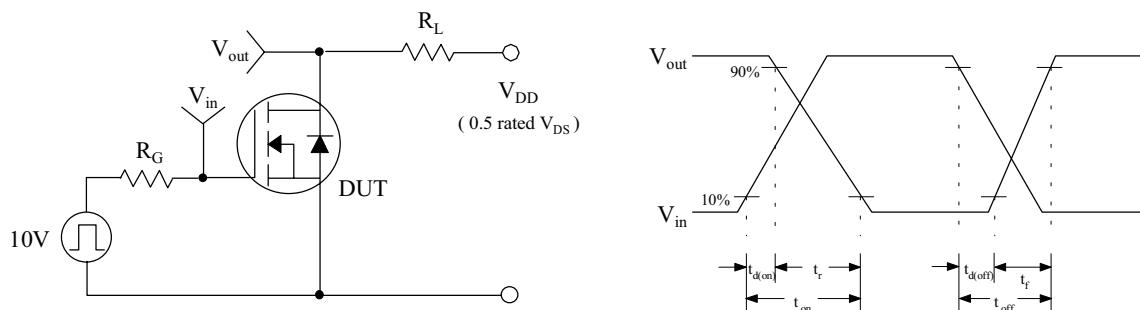

**Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms**

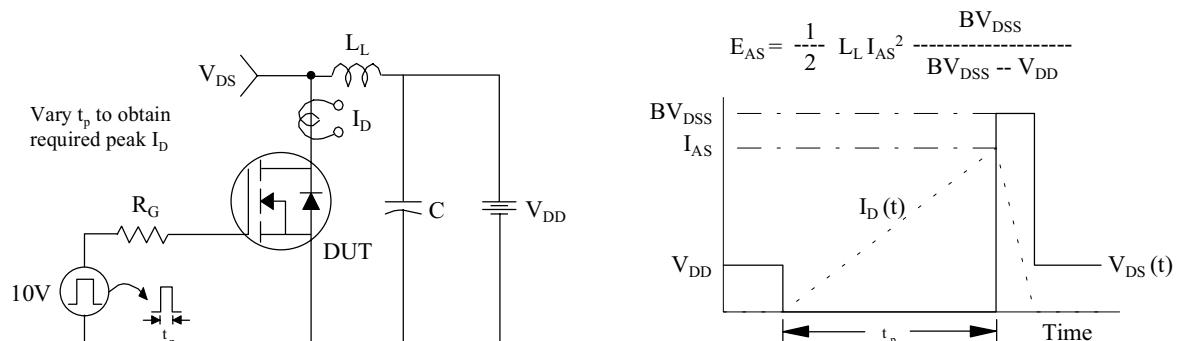

# IRFS640A

N-CHANNEL  
POWER MOSFET

Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms

