

KSR1007

NPN EPITAXIAL SILICON TRANSISTOR


SWITCHING APPLICATION (Bias Resistor Built In)

- Switching circuit, Inverter, Interface circuit, Driver Circuit
- Built in bias Resistor ($R_1=22k\Omega$, $R_2=47k\Omega$)
- Complement to KSR2007

ABSOLUTE MAXIMUM RATINGS ($T_A=25\text{ }^{\circ}\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	10	V
Collector Current	I_C	100	mA
Collector Dissipation	P_C	300	mW
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ 150	$^{\circ}\text{C}$

TO-92




1. Emitter 2. Collector 3. Base

ELECTRICAL CHARACTERISTICS ($T_A=25\text{ }^{\circ}\text{C}$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C=10\mu A$, $I_E=0$	50			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=100\mu A$, $I_B=0$	50			V
Collector Cut-off Current	I_{CBO}	$V_{CB}=40V$, $I_E=0$			0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=5V$, $I_C=5mA$	68			
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=10mA$, $I_B=0.5mA$			0.3	V
Output Capacitance	C_{OB}	$V_{CE}=10mA$, $I_E=0$ $f=1MHz$		3.7		pF
Current Gain-Bandwidth Product	f_T	$V_{CE}=5mA$, $I_C=10V$		250		MHz
Input Off Voltage	$V_i(off)$	$V_{CE}=5V$, $I_C=100\mu A$	0.4			V
Input On Voltage	$V_i(on)$	$V_{CE}=0.3V$, $I_C=2mA$			2.5	V
Input Resistor	R_1		15	22	29	$k\Omega$
Resistor Ratio	R_1/R_2		0.42	0.47	0.52	

Equivalent Circuit

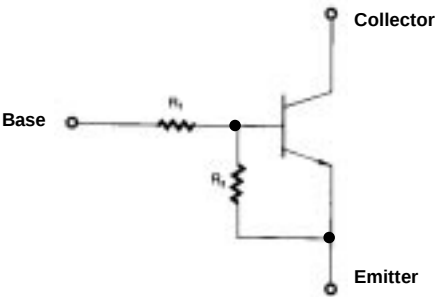

KSR1007

NPN EPITAXIAL SILICON TRANSISTOR

