

KSR1204

NPN EPITAXIAL SILICON TRANSISTOR


SWITCHING APPLICATION (Bias Resistor Built In)

- Switching circuit, Inverter, Interface circuit, Driver Circuit
- Built in bias Resistor ($R_1=47k\Omega$, $R_2=47k\Omega$)
- Complement to KSR2204

ABSOLUTE MAXIMUM RATINGS ($T_A=25\text{ }^{\circ}\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	10	V
Collector Current	I_C	100	mA
Collector Dissipation	P_C	300	mW
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ 150	$^{\circ}\text{C}$

TO-92S




1. Emitter 2. Collector 3. Base

ELECTRICAL CHARACTERISTICS ($T_A=25\text{ }^{\circ}\text{C}$)





Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C=10\mu\text{A}$, $I_E=0$	50			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=100\mu\text{A}$, $I_B=0$	50			V
Collector Cut-off Current	I_{CBO}	$V_{CB}=40\text{V}$, $I_E=0$			0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=5\text{V}$, $I_C=5\text{mA}$	68			
Collector-Emitter Saturation Voltage	$V_{CE}(\text{sat})$	$I_C=10\text{mA}$, $I_B=0.5\text{mA}$			0.3	V
Current Gain-Bandwidth Product	f_T	$V_{CE}=5\text{mA}$, $I_C=10\text{V}$		250		MHz
Output Capacitance	C_{OB}	$V_{CB}=10\text{V}$, $I_E=0$ $f=1.0\text{MHz}$		3.7		pF
Input Off Voltage	$V_i(\text{off})$	$V_{CE}=5\text{V}$, $I_C=100\mu\text{A}$	0.5			V
Input On Voltage	$V_i(\text{on})$	$V_{CE}=0.3\text{V}$, $I_C=2\text{mA}$			3	V
Input Resistor	R_1		32	47	62	$k\Omega$
Resistor Ratio	R_1/R_2		0.9	1	1.1	

Equivalent Circuit

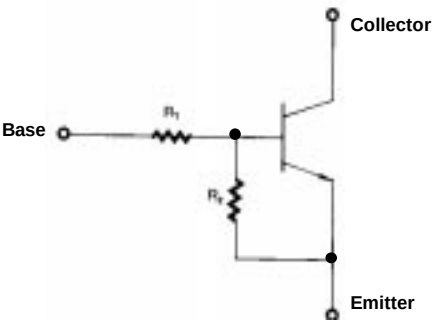

KSR1204

NPN EPITAXIAL SILICON TRANSISTOR

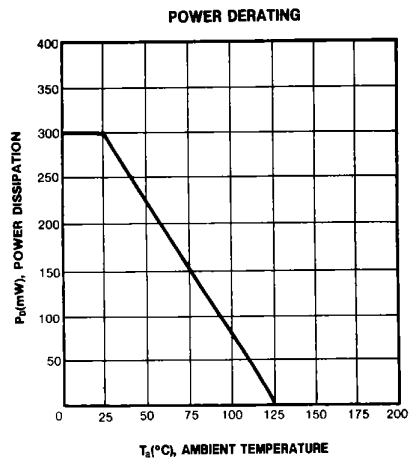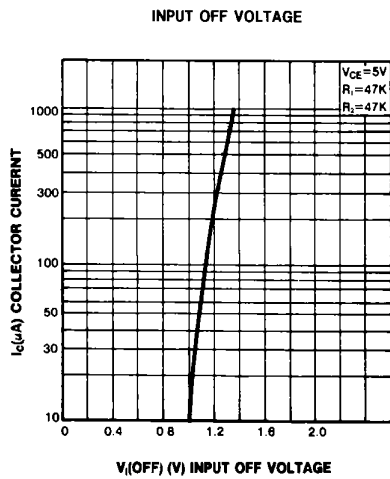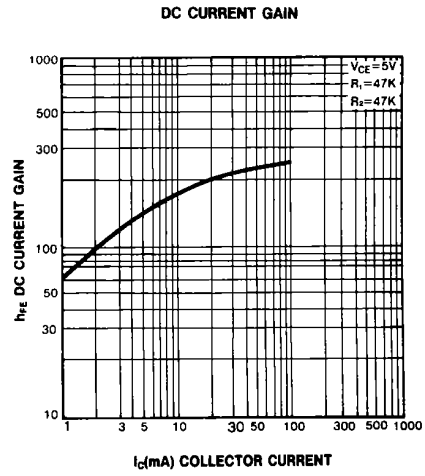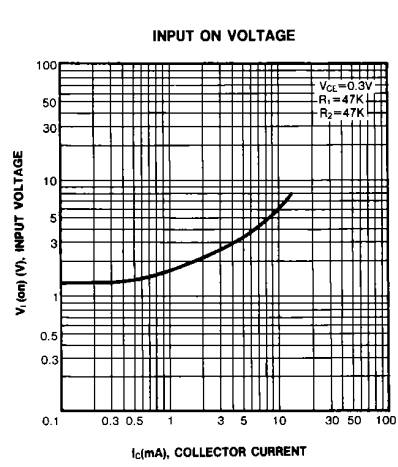

KSR1204

NPN EPITAXIAL SILICON TRANSISTOR

