

**LPH-14918-09****LED PRINTHEAD**

1. Description


LPH-14918-09 is a printing head for optical printer using one-line LED array of 14464 dots.

It has 128 bit Driver ICs which consist of shift register, latch, strobe and output driver.

It has an effective printing width of 918.4 mm, a resolution of 400 dot/inch and can perform high-speed and high reliable printing.

2. Mechanical Characteristics (refer to Fig. LPH14918090-00010-AA) (Ta=25°C)

No.	Item	Ratings
(1)	Array Length	918.5 mm $\pm$ 0.5 mm
(2)	Number of Emitters	14464 dots
(3)	Emitter Size	35 μ m $\times$ 40 μ m $\pm$ 5(with stripe electrode)
(4)	Emitter Pitch	63.5 μ m
(5)	Pitch Error (X1)	$\pm$ 20 μ m (chip to chip) $\pm$ 5 μ m (inside a chip)
(6)	Emitter Y-Direction Error (Y1)	Max. 20 μ m (chip to chip)
	Emitter Linearity (Y2)	Max. 200 μ m (along LED chips)
(7)	1st dot Distance from Origin Point	X2=33.3 $\pm$ 0.3mm Y2=0 $\pm$ 0.2mm Z=1.2 $\pm$ 0.2mm
(8)	Head Dimensions	1015(L) $\times$ 38(W) $\times$ 38(H)
(9)	Head Weight	T.B.D.

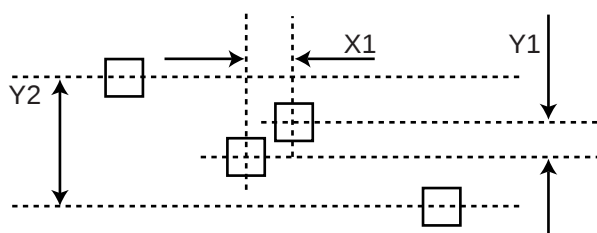

3. Optical Characteristics (Ta=25°C, SLA-20 TC18.0)

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Wavelength	λ_p	665	665	675	nm	
Average Light Output	IO	0.5	-	-	$\mu\text{W/dot}$	*1
Uniformity1	ID	-	-	22.5	%	*2
Uniformity2	IR	-	-	10	%	*3
MTF		40	-	-	%	*4, 1 on / 1 off

*1 Power meter AQ-2105B (ANDO electric co., Ltd.)

*2 $ID = ((I_{\text{max}} - I_{\text{min}}) / (I_{\text{max}} + I_{\text{min}})) \times 100 \%$

*3 $IR = ((I_{\text{ave}}(n) - I_{\text{ave}}(n-1)) / I_{\text{ave}}(n-1)) \times 100 \%$

*4 $MTF = ((a-b) / (a+b)) \times 100 \%$ (at Drum Surface)

4. Electrical Characteristics

4-1 Electrical Circuit

Item	Summary
(1) Equivalent Circuit	Refer to LHP14918090-00020-AA
(2) Timing Chart(Pixel Level)	Refer to LHP14918090-00030-AA
(3) Data Transfer Method	8 inputs serial transfer (ODD / EVEN)
(4) Clock Frequency	Max. 15 MHz
(5) Interface (Pin Assignment)	Refer to LPH14918090-00020-AA

4-2 Absolute Maximum Ratings

Item	Sym	Conditions	Min	Typ	Max	Unit	Remarks
Supply Voltage	V _{DD}	Ta=25°C	- 0.3	-	6.5	V	
Input Voltage	V _I	Ta=25°C	- 0.3	-	V _{DD} +0.3	V	
LED Junction Temp.	T _j		-	-	80	°C	
Head Temp.	Thead		-	-	60	°C	Al Base

4-3 Recommended operating Conditions (Ta=25°C, Vss= 0V)

Item	Sym.	Conditions	Min	Typ	Max	Unit	Remarks
Supply Voltage	V _{DD}	Ta=25°C	4.75	5.0	5.25	V	
CLOCK Frequency	f _c		-	-	15	MHz	
Supply Current	IP	Ta=25°C			60	A	

4-4 Electrical Characteristics (Ta=25°C, VDD=5 ± 0.25V)

Item	Symbol	Conditions	Min.	Typ.	Max.	Units	Remarks
"H"Level Input Voltage	V _{IH}		0.7V _{DD}	-	V _{DD}	V	DATA,CLOCK,LOAD,STB
"L"Level Input Voltage	V _{IL}		0	-	0.3V _{DD}	V	DATA,CLOCK,LOAD,STB
"H"Level Input Current	I _{IH}	V _I =V _{DD} =5.25V	-	-	150	μA	DATA,CLOCK,LOAD
"L"Level Input Current	I _{IL}	V _{DD} =5.25V V _I =0V	-	-	-150	μA	DATA,CLOCK,LOAD
		V _{DD} =5V V _I =0V	- 0.9	- 2.8	- 5.7	mA	STB
Supply Current	I _{ON}	V _{DD} =5.25V ALL ON f _c =15MHz	-	18	27	A	V _{DD} , V _{SS} 1/4BLOCK ON
	I _{DD}	V _{DD} =5.25V ALL ON f _c =15MHz	-	2.8	3.6	A	V _{DD} , V _{SS}

5. Environmental Performance

Item	Guarantee Range
(1) Operating Temperature	5→45°C
(2) Operating Humidity	10→90 % RH (No Condensation)
(3) Storage Temperature	-10→65°C
(4) Storage Humidity	10→90 %RH (No Condensation)


6. Life

- (1) Operating Conditions
 - (a) The number of lighting dots is 10 % of all dots on an average.
 - (b) Electrical Operation Ratings are typical values. (LED Duty Cycle / line ; 50 % max.)
- (2) Judgement Criteria

The point where the average light output declines 30 % from the initial value or the point where the minimum light output declines 50 % from the initial value.
- (3) Life (LED on time)

Min. 1000 hrs.

Timing Chart

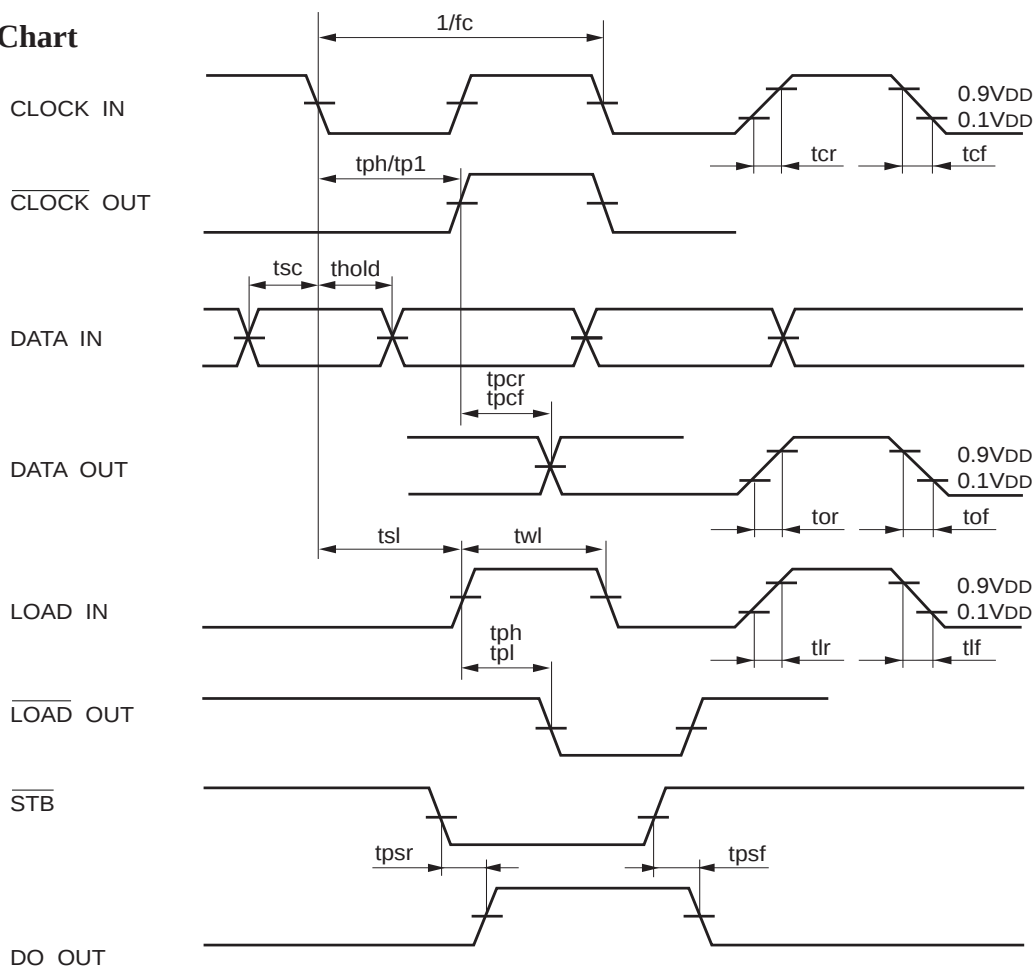


Switching Character

($V_{DD}=4.5$ to $5.5V$, $T_j=0$ to $100^{\circ}C$. $C_L=10pF$)


Note	Symbol	Condition	Standard			Unit
			Min	Typ	Max	
FREQUENCY	f_c	-	-	-	15	MHz
CLOCK Duty	D_{clk}	-	45	50	55	%
DATA IN $\rightarrow$ CLOCK Setup time	t_{sc}	-	20	-	-	ns
DATA Hold time	t_{hold}	-	10	-	-	ns
CLOCK OUT $\rightarrow$ DATA OUT Delay Time	t_{pcr} t_{pcf}	-	10	-	46	ns
CLOCK IN $\rightarrow$ LOAD IN Setup Time	t_s ;	-	30	-	-	ns
LOAD Pulse width	t_w ;	-	30	-	-	ns
STB $\rightarrow$ LED ON Delay Time	t_{psr} t_{psf}	- (10k Ω)	- -	- -	250 250	ns
CLOCK IN $\rightarrow$ CLOCK OUT LOAD IN $\rightarrow$ LOAD OUT Delay Time	t_{ph} t_{pl}	-	- -	- -	35	ns
CLOCK Rise / Fall Time	t_{cr} t_{cf}	-	- -	- -	30	ns
LOAD Rise / Fall Time	t_{lr} t_{lf}	-	- -	- -	30	ns
DATA Rise / Fall Time	t_{or} t_{of}	-	- -	- -	35	ns

LED Print Head

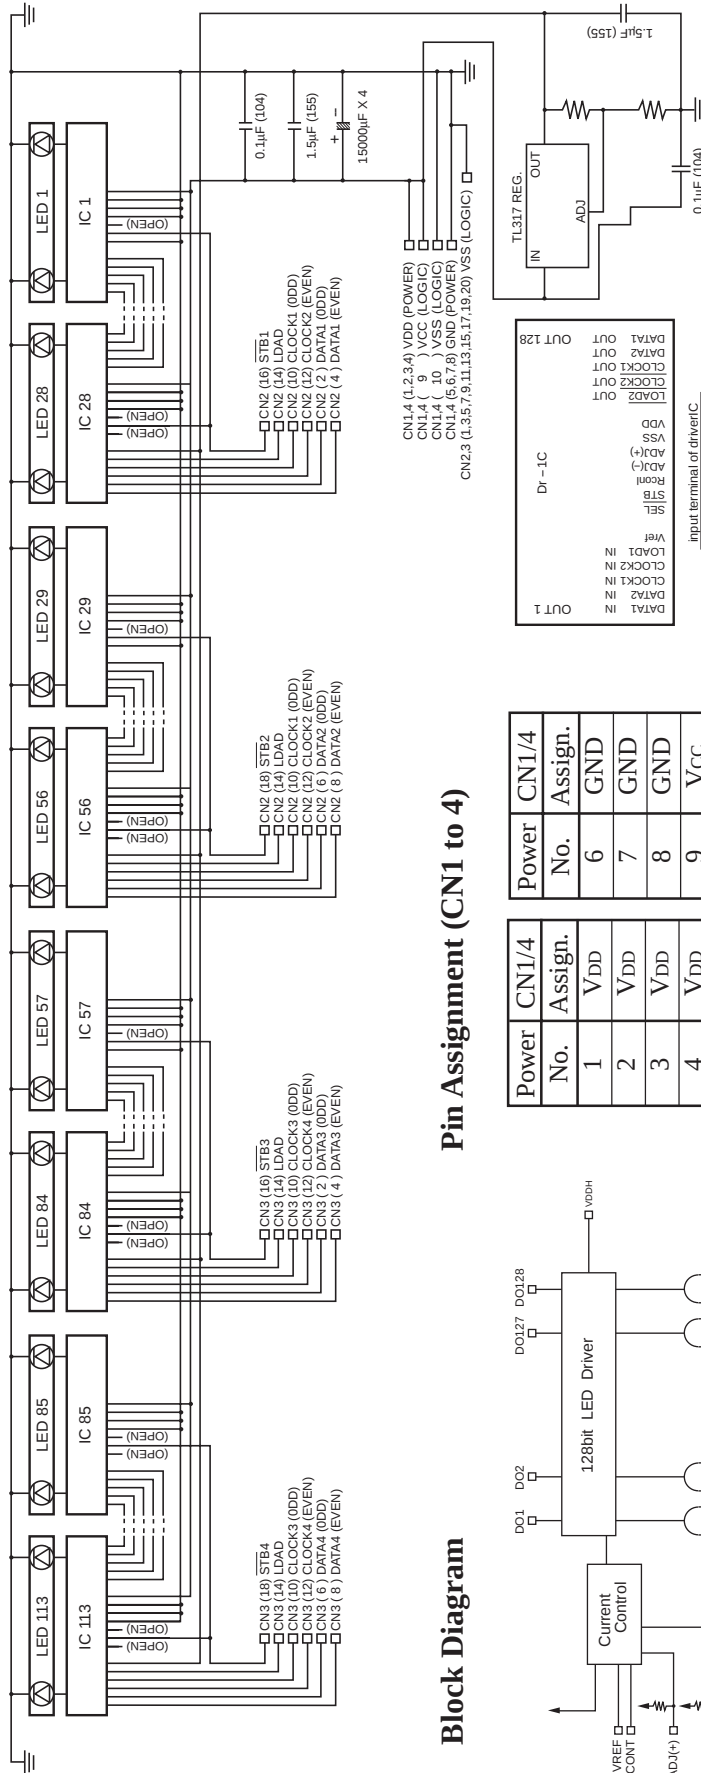

Pin Assignment (CN1 to 4)

Block Diagram

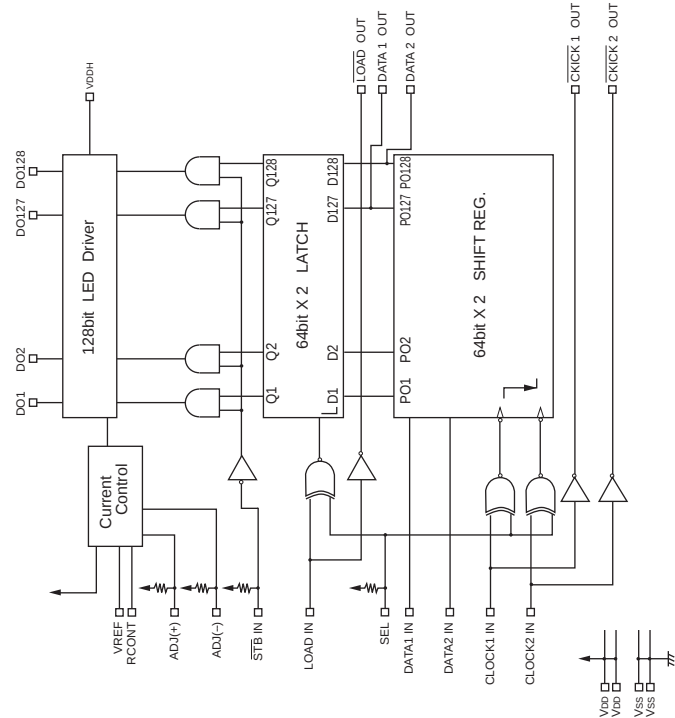

1."SEL" terminal ... open (odd IC) , Vss (even IC)

Logic No.	CN3 Assign.	CN2 Assign.	Logic No.	CN3 Assign.	CN2 Assign.
1	V _{SS}	V _{SS}	11	V _{SS}	V _{SS}
2	DATA 3 (ODD)	DATA 1 (ODD)	12	CLK 4 (EVEN)	CLK 2 (EVEN)
3	V _{SS}	V _{SS}	13	V _{SS}	V _{SS}
4	DATA 3 (EVEN)	DATA 1 (EVEN)	14	LOAD	LOAD
5	V _{SS}	V _{SS}	15	V _{SS}	V _{SS}
6	DATA 4 (ODD)	DATA 2 (ODD)	16	STB 3	STB 1
7	V _{SS}	V _{SS}	17	V _{SS}	V _{SS}
8	DATA 4 (EVEN)	DATA 2 (EVEN)	18	STB 4	STB 2
9	V _{SS}	V _{SS}	19	V _{SS}	V _{SS}
10	CLK 3 (ODD)	CLK 1 (ODD)	20	V _{SS}	V _{SS}



1. No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster / crime-prevention equipment or the like, and the failure of which may directly or indirectly cause injury, death or property loss.
2. Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - 1) Accept full responsibility and indemnify and defend SANYO ELECTRIC CO.,LTD., it's affiliates, subsidiaries and distributors or any of their officers and employees, jointly and severally, against any and all claims and litigation and all damages, costs and expenses associated with such use.
 - 2) Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., it's affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
3. Information (including circuit diagrams and circuit parameters) disclosed herein is for example only; it is not guaranteed for mass production, SANYO believes the information disclosed herein is accurate and reliable, but no guarantees are made or implied regarding it's use or any infringements of intellectual property rights or other rights of third parties.

Precautionary instructions in handling gallium arsenic products

Special precautions must be taken in handling this product because it contains, gallium arsenic, which is designated as a toxic substance by law. Be sure to adhere strictly to all applicable laws and regulations enacted for this substance, particularly when it comes to disposal.

Manufactured by ; **Tottori SANYO Electric Co., Ltd.**
Electronics Device Bussiness Headquarters LED Division
5-318, Tachikawa-cho, Tottori City, 680-8634 Japan
TEL: +81-857-21-2137 FAX: +81-857-21-2161