

# MAXIM

## MAX662A Evaluation Kit

Evaluates: MAX662A

### General Description

The MAX662A evaluation kit (EV kit) is an assembled surface-mount board that allows easy evaluation of the MAX662A or MAX662. The EV kit schematic is the standard circuit shown in Figure 3a on page 5 of the MAX662A data sheet. A 3-pin jumper connector and a shunt are included to allow easy control of normal-operation and shutdown modes.

### Ordering Information

PART	TEMP. RANGE	BOARD TYPE
MAX662AEVKIT-SO	0°C to +70°C	Surface Mount

### Component List

DESIGNATION	QTY	DESCRIPTION
C1, C2	2	0.22μF ceramic SMD chip capacitors
C3	1	0.1μF ceramic SMD chip capacitor (MAX662 only)
C4, C5	2	4.7μF low-ESR tantalum capacitors
J1	1	3-pin jumper
None	1	Shunt
U1	1	MAX662ACSA
None	1	MAX662A data sheet
None	1	1.5" x 1.1" PC board

### Operating Instructions

Pin 1 of the 3-pin jumper connector is tied to ground, pin 2 is tied to the SHDN pin of the MAX662A, and pin 3 is tied to VCC (Figure 1). Connect the jumper shunt across pins 1 and 2 of jumper connector J1 for normal operation. **Note: The MAX662A EV kit will be in shutdown mode if the jumper shunt is not inserted across J1. The SHDN pin has an internal pull-up to VCC, and therefore must be connected to ground for proper operation.** Connect the jumper shunt across jumper connector pins 2 and 3, or simply remove the jumper shunt to observe shutdown-mode operation.

Observe the power-supply input voltage limits specified in the data sheet. Do not short the output to ground. Also, do not excessively load the output—V<sub>OUT</sub> should not fall below V<sub>CC</sub>. If the above conditions are violated, the device may be damaged.

### PC Board Layout

The EV kit printed circuit board layouts (Figures 2 and 3) can be copied directly and incorporated into production boards.

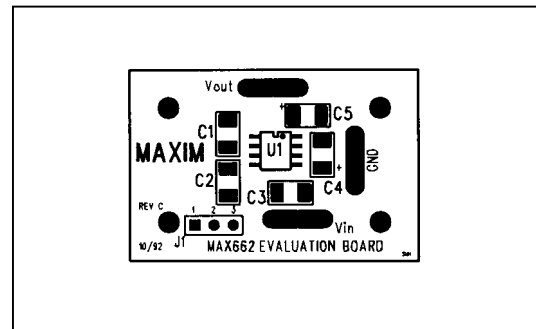


Figure 1. MAX662A EV Kit Surface-Mount Component Placement Diagram (1x scale)

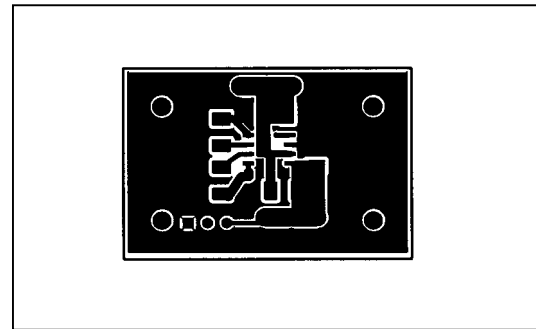


Figure 2. MAX662A EV Kit PC Board Layout—Component Side (1x scale)

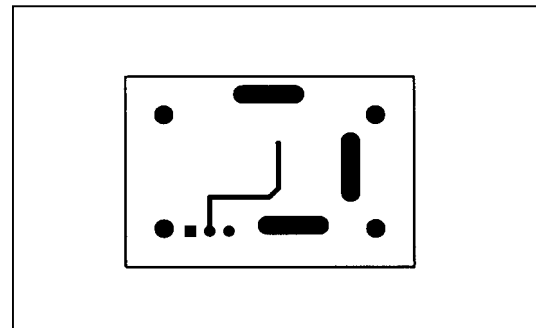


Figure 3. MAX662A EV Kit PC Board Layout—Solder Side (1x scale)

Evaluates: MAX662A

**MAXIM**

1994  
EVALUATION KIT  
DATA BOOK

*Featuring:*

- Product Data Sheets
- Evaluation Kit Manuals
- Price Literature Request Cards

Other Data Books Available from Maxim:

- *1994 New Products Data Book*
- *1994 Supply Management (MPS) & Customer Credit Guidelines*
- *1994 Customer Service Request Card*
- *1994 New Reference Data Book, Vol. 1*
- *1994 New Reference Data Book, Vol. 2*
- *1994 Specifications & Product Highlights Book*
- *1994 Specifications & Product Highlights Book*

Call toll free 1-800-955-0020 for free samples or literature.

FAX NUMBERS:

**Japan** (03) 3232-6149

**Taiwan** (35) 777659

My end product is: \_ \_ \_ \_ \_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_ Phone# \_\_\_\_\_

**MAXIM** is a registered trademark of Maxim Integrated Products.