



MOTOROLA

Advanced Medium Voltage AM Stereo Decoder


The MC13022 is designed for home, portable and automotive AM stereo radio applications. The circuits and functions included in the design allow implementation of a full-featured C-QUAM® AM stereo radio with relatively few, inexpensive external parts. It is available in either 28-lead DIP or EIAJ compatible wide-bodied 28-lead SOIC.

- Operation from 4.0 V to 10 V Supply with Current Drain of 18 mA Typ
- IF Amplifier with Two Speed AGC
- Post Detection Filters that Allow Manual or Automatic Adjustable Audio Bandwidth Control and 9.0 or 10 kHz Notch Filtering
- Signal Quality Controlled Stereo Blend and Noise Reduction
- Noise and Co-Channel Discriminating Stop-On-Station
- Signal Strength Indicator Output for RF AGC and/or Meter Drive
- Signal Strength Controlled IF and Audio Bandwidth
- Noise Immune Pilot Detector Needs no Precision Filter Components
- MC13023 Complementary Tuning System IC


MC13022

C-QUAM ADVANCED MEDIUM VOLTAGE AM STEREO DECODER

SEMICONDUCTOR TECHNICAL DATA




P SUFFIX
PLASTIC PACKAGE
CASE 710



DW SUFFIX
PLASTIC PACKAGE
CASE 751F
(SO-28L)

Simplified Application

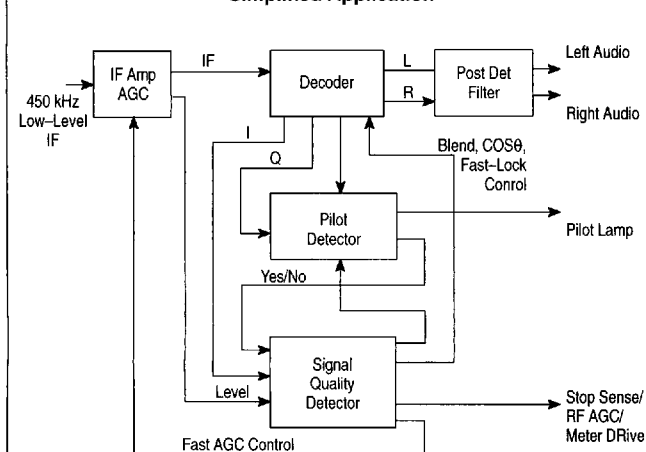

PIN CONNECTIONS

Env Det	1	28	I Det
Decoder Input	2	27	L-R Det
Ref	3	26	Q Out
AGC	4	25	VCC
IF Input	5	24	Loop Filter
SS RF AGC	6	23	Blend
Filtered Left Out	7	22	GND
Left Notch In	8	21	Stereo Lamp
Feedback	9	20	Osc Feedback
Unfiltered L out	10	19	Osc In
Unfiltered R out	11	18	Pilot Det In
Feedback	12	17	I Pilot
Right Notch In	13	16	Q Pilot
Filtered Right Out	14	15	Filter Control

(Top View)

ORDERING INFORMATION

Device	Operating Temperature Range	Package
MC13022P	$T_A = -40^\circ \text{ to } +85^\circ \text{C}$	Plastic Power
MC13022DW		SO-28L

6367253 0102385 429

MC13022

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Power Supply Input Voltage	V_{CC}	12	Vdc
Stereo Indicator Lamp Current (Pin 21)	—	30	mA _{dc}
Operating Ambient Temperature	T_A	−40 to +85	°C
Storage Temperature Range	T_{stg}	−65 to +150	°C
Operating Junction Temperature	$T_{J(max)}$	150	°C
Power Dissipation Derate above 25°C	P_D	1.25 10	W mW/°C

NOTE: ESD data available upon request.


ELECTRICAL CHARACTERISTICS ($V_{CC} = 8.0$ V, $T_A = 25^\circ\text{C}$, Test Circuit of Figure 1, unless otherwise noted.)

Characteristic	Min	Typ	Max	Unit
Power Supply Operating Range	4.0	8.0	10	Vdc
Supply Line Current Drain (Pin 25)	11	16	22	mA _{dc}
Minimum Input Signal Level, Unmodulated for Full Operation (Pin 5)	—	5.0	—	mV _{rms}
Audio Output Level, 50% Modulation, L only or R only (Pins 10, 11) Stereo	100	140	180	mV _{rms}
Audio Output Level, 50% Modulation (Pins 10, 11) Monaural	50	70	90	mV _{rms}
Output THD, 50% Modulation Monaural	—	0.3	0.5	%
Stereo	—	0.5	2.0	%
Channel Separation, L only or R only, 50% Modulation Stereo	22	35	—	dB
Pilot Acquisition Time Following Blend Reset to 0.3 Vdc	—	—	600	ms
Audio Output Impedance at 1.0 kHz (Pins 7, 14)	—	300	—	Ω
Stereo Indicator Lamp Pin Saturation Voltage at 3.0 mA Load Current (V_{sat} Pin 21)	—	—	200	mVdc
Stereo Indicator Lamp Pin Leakage Current (Pin 21)	—	—	1.0	μA_{dc}
Notch Filter Control (Pin 15), Response versus Voltage	(See Figure 2)			

6367253 0102386 365

MC13022

Figure 1. Test Circuit

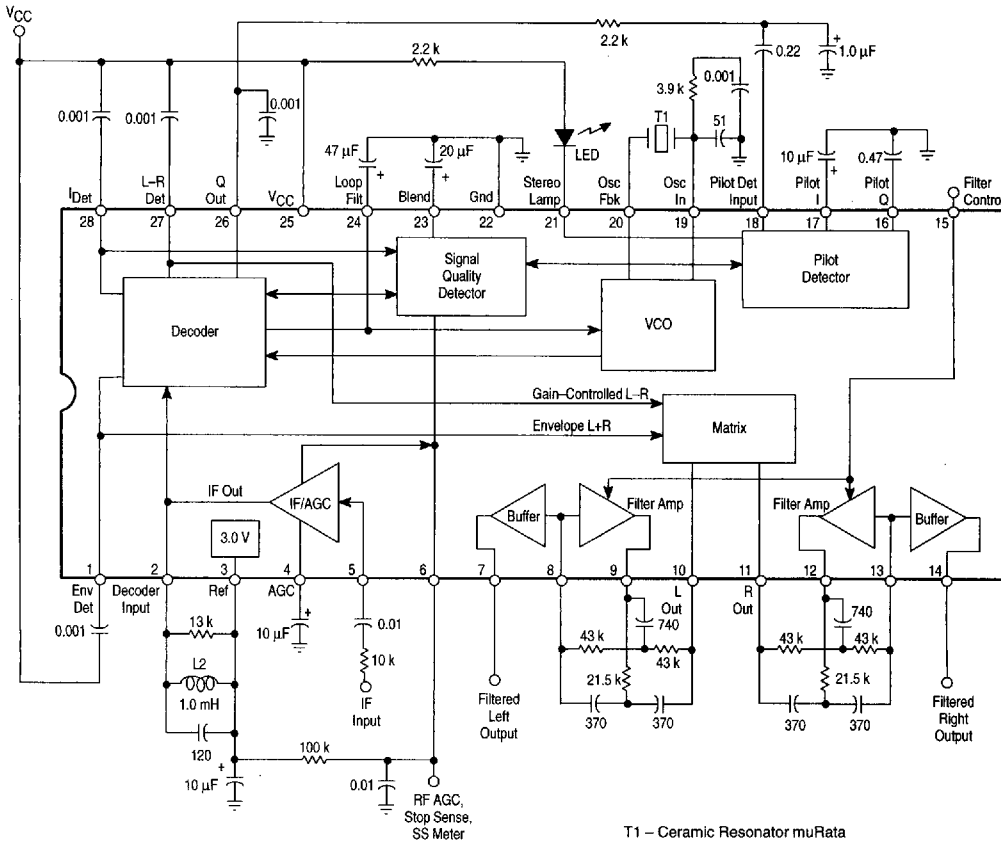

T1 – Ceramic Resonator muRata
CSA 3.60 MGF103
L2 – Miller 9230-92

MC13022

EXPLANATION OF FEATURES

Blend and Noise Reduction

Although AM stereo does not have the extreme difference in S/N between mono and stereo that FM does (typically less than 3.0 dB versus greater than 20 dB for FM), sudden switching between mono and stereo is quite apparent. Some forms of interference such as co-channel have a large L-R component that makes them more annoying than would ordinarily be expected for the measured level. The MC13022 measures the interference level and reduces L-R as interference increases, blending smoothly to monaural. The pilot indicator remains on as long as a pilot signal is detected, even when interference is severe, to minimize annoying pilot light flickering.

RF AGC/Meter Drive

A dc voltage proportional to the log of signal strength is provided at Pin 6. This can be used for RF AGC, signal strength indication, and/or control of the post detection filter. Normal operation is above 2.2 V as shown in Figure 4.

Stop Sense

Multiplexed with the signal strength information is the stop sense signal. The stop sense is activated when scanning by externally pulling the blend capacitor on Pin 23 below 0.5 V. This would typically be done from the mute line in a frequency synthesizer.

If at any time Pin 23 is low and there is either no signal in the IF or a noisy signal of a predetermined interference level, Pin 6 will go low. This low can be used to tell the frequency

synthesizer to immediately scan to the next channel. The interference detection prevents stopping on many unlistenable stations, a feature particularly useful at night when many frequencies may have strong signals from multiple co-channel stations.

IF Bandwidth Control

IF AGC attenuates the signal by shunting the signal at the IF input. This widens the IF bandwidth by decreasing the loaded Q of the input coupling coil as signal strength increases.

Post Detection Filtering

With weak, noisy signals, high frequency rolloff greatly improves the sound. Conventional tone controls do not attenuate the highs sufficiently to control noise without also significantly affecting the mid-range. Also, notch filters are necessary with any wide-band AM radio to eliminate the 10 kHz whistle from adjacent stations.

By using a twin-T filter with variable feedback to the normally grounded center leg, a variable Q notch filter is formed that provides both the 10 kHz notch and variable high frequency rolloff functions. Typical range of response is shown in Figure 3. Response is controlled by the dc voltage on Pin 15.

Pin 15 could interface with a dc operated tone control such as the TDA1524, or could be tied to Pin 6 for automatic audio bandwidth control as a function of signal strength.