

MC68HC08RC16

HCMOS Microcontroller Unit

TECHNICAL DATA

Motorola reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.

List of Sections

Section 1. General Description	23
Section 2. Memory Map	31
Section 3. Random-Access Memory (RAM)	41
Section 4. Read-Only Memory (ROM)	43
Section 5. Central Processor Unit (CPU)	45
Section 6. Resets and Interrupts	61
Section 7. Low-Power Modes	77
Section 8. Low-Voltage Inhibit (LVI)	89
Section 9. Oscillator	95
Section 10. Mask Option Register (MOR)	99
Section 11. Input/Output Ports (I/O)	103
Section 12. Carrier Modulator Transmitter (CMT)	113
Section 13. Modulo Timer (TIM0I)	137
Section 14. External Interrupt (IRQ)	147
Section 15. Keyboard Interrupt Module (KBI)	153
Section 16. Computer Operating Properly (COP)	161
Section 17. Monitor ROM (MON)	167
Section 18. Break Module (BRK)	179
Section 19. Electrical Specifications	187
Section 20. Mechanical Specifications	195
Section 21. Ordering Information	197

List of Sections

Table of Contents

Section 1. General Description

1.1	Contents	23
1.2	Features	24
1.3	MCU Block Diagram	25
1.4	Pin Assignments	27
1.5	Pin Functions	27
1.5.1	V _{DD} and V _{SS}	27
1.5.2	BATT	28
1.5.3	External Interrupt Pin ($\overline{\text{IRQ1}}$)	28
1.5.4	OSC1 and OSC2	29
1.5.5	RST	29
1.5.6	IRO	29
1.5.7	Port A Input/Output Pins (PTA7–PTA0)	29
1.5.8	Port B Input/Output Pins (PTB7/ $\overline{\text{KBD7}}$ –PTB0/ $\overline{\text{KBD0}}$)	29
1.5.9	Port C Input/Output Pins (PTC3–PTC0)	30

Section 2. Memory Map

2.1	Contents	31
2.2	Introduction	31
2.3	I/O Section	33
2.4	Monitor ROM (MON)	39

Section 3. Random-Access Memory (RAM)

3.1	Contents	41
3.2	Introduction	41
3.3	Functional Description	41

Section 4. Read-Only Memory (ROM)

4.1	Contents	43
4.2	Introduction	43
4.3	Functional Description	43

Section 5. Central Processor Unit (CPU)

5.1	Contents	45
5.2	Introduction	46
5.3	Features	46
5.4	CPU Registers	46
5.4.1	Accumulator	47
5.4.2	Index Register	47
5.4.3	Stack Pointer	48
5.4.4	Program Counter	49
5.4.5	Condition Code Register	49
5.5	Arithmetic/Logic Unit (ALU)	51
5.6	Low-Power Modes	51
5.6.1	Wait Mode	52
5.6.2	Stop Mode	52
5.7	CPU During Break Interrupts	52
5.8	Instruction Set Summary	52
5.9	Opcode Map	59

Section 6. Resets and Interrupts

6.1	Contents	61
6.2	Introduction	62
6.3	Resets	62
6.3.1	Reset Entry	63
6.3.1.1	External Reset	63
6.3.1.2	COP Reset	63
6.3.1.3	Illegal Opcode Reset	63
6.3.1.4	Illegal Address Reset	64
6.3.1.5	Low-Power Reset	64
6.3.2	Reset Recovery	64
6.3.2.1	External Reset Recovery	65
6.3.2.2	Active Reset Recovery	65
6.3.2.3	Power-On Reset (POR) Recovery	65
6.3.3	Reset Status Register	67
6.3.4	Reset States	68
6.4	Interrupts	70
6.4.1	Effects	70
6.4.2	Sources	73
6.4.2.1	SWI Instruction	73
6.4.2.2	Break Interrupt	73
6.4.2.3	IRQ1 Pin	73
6.4.2.4	CMT Interrupt	73
6.4.2.5	TIM0I Interrupt	74
6.4.2.6	KBD0–KBD7 Pins	74
6.4.3	Interrupt Status Registers	74
6.4.3.1	Interrupt Status Register 1	75
6.4.3.2	Interrupt Status Register 2	76

Section 7. Low-Power Modes

7.1	Contents	77
7.2	Introduction	78
7.3	Wait Mode	78
7.4	Stop Mode	78

Table of Contents

7.5	Low-Power Reset Mode	78
7.5.1	External Circuits	79
7.5.2	Low-Power Reset Operation	80
7.5.3	RAM Retention Determination	81
7.6	Central Processor Unit (CPU).	82
7.6.1	Wait Mode	82
7.6.2	Stop Mode	82
7.7	Break Module (BRK).	83
7.7.1	Wait Mode	83
7.7.2	Stop Mode	83
7.8	Computer Operating Properly Module (COP).	83
7.8.1	Wait Mode	83
7.8.2	Stop Mode	83
7.9	External Interrupt Module (IRQ)	84
7.9.1	Wait Mode	84
7.9.2	Stop Mode	84
7.10	Keyboard Interrupt Module (KBI)	84
7.10.1	Wait Mode	84
7.10.2	Stop Mode	84
7.11	Low-Voltage Inhibit Module (LVI)	85
7.11.1	Wait Mode	85
7.11.2	Stop Mode	85
7.12	Carrier Modulator Transmitter (CMT)	85
7.12.1	Wait Mode	85
7.12.2	Stop Mode	85
7.13	Timer Interface Module (TIM0I)	86
7.13.1	Wait Mode	86
7.13.2	Stop Mode	86
7.14	Exiting Wait Mode.	86
7.15	Exiting Stop Mode.	87

Section 8. Low-Voltage Inhibit (LVI)

8.1	Contents	89
8.2	Introduction	89
8.3	Features	90
8.4	Functional Description	90
8.4.1	False Trip Protection	91
8.4.2	Short Stop Recovery Option	92
8.5	LVI Status Register	92
8.6	LVI Interrupts	92
8.7	Low-Power Modes	93
8.7.1	Wait Mode	93
8.7.2	Stop Mode	93

Section 9. Oscillator

9.1	Contents	95
9.2	Introduction	95
9.3	Oscillator External Connections	96
9.4	I/O Signals	97
9.4.1	Crystal Amplifier Input Pin (OSC1)	97
9.4.2	Crystal Amplifier Output Pin (OSC2)	97
9.4.3	Oscillator Enable Signal (SIMOSCEN)	97
9.4.4	External Clock Source (CGMXCLK)	97
9.4.5	Oscillator Out (CGMOUT)	97
9.4.6	Bus Clocks	97
9.5	Low-Power Modes	98
9.5.1	Wait Mode	98
9.5.2	Stop Mode	98
9.6	Oscillator During Break Mode	98

Section 10. Mask Option Register (MOR)

10.1	Contents	99
10.2	Introduction	99
10.3	Functional Description	100

Section 11. Input/Output Ports (I/O)

11.1	Contents	103
11.2	Introduction	103
11.3	Port A	105
11.3.1	Port A Data Register	105
11.3.2	Data Direction Register A	105
11.4	Port B	107
11.4.1	Port B Data Register	107
11.4.2	Data Direction Register B	108
11.5	Port C	110
11.5.1	Port C Data Register	110
11.5.2	Data Direction Register C	111

Section 12. Carrier Modulator Transmitter (CMT)

12.1	Contents	113
12.2	Introduction	114
12.3	Clock Generation	114
12.4	Overview	116
12.5	Carrier Generator	118
12.5.1	Time Counter	119
12.6	Modulator	120
12.6.1	Time Mode	122
12.6.1.1	Synchronization of Modulator and Carrier Generator in Time Mode	123
12.6.2	Baseband Mode	123
12.6.3	FSK Mode	124

12.6.4	Extended Space Operation	125
12.6.4.1	EXSPC Operation in Time Mode	125
12.6.4.2	EXSPC Operation in FSK Mode	126
12.7	Transmitter	127
12.8	IRO Latch	127
12.9	Flags and Interrupts	128
12.10	I/O Registers	129
12.10.1	Carrier Generator Data Registers (CCH1, CCL1, CCH2, and CCL2)	129
12.10.2	CMT Modulator Control and Status Register	132
12.10.3	CMT Modulator Data Registers (CMD1, CMD2, and CMD3)	135
12.11	Wait Mode Operation	136
12.12	Stop Mode Operation	136

Section 13. Modulo Timer (TIM0I)

13.1	Contents	137
13.2	Introduction	137
13.3	Features	138
13.4	Functional Description	138
13.4.1	TIM0I Counter Prescaler	139
13.5	Interrupts	140
13.6	Low-Power Modes	140
13.6.1	Wait Mode	140
13.6.2	Stop Mode	140
13.7	TIM0I During Break Interrupts	141
13.8	I/O Registers	141
13.8.1	TIM0I Status and Control Register	141
13.8.2	TIM0I Counter Registers	144
13.8.3	TIM0I Counter Modulo Registers	145

Section 14. External Interrupt (IRQ)

14.1	Contents	147
14.2	Introduction.....	147
14.3	Features	147
14.4	Functional Description	148
14.5	$\overline{\text{IRQ1}}$ Pin.....	149
14.6	IRQ Module During Break Interrupts	150
14.7	IRQ Status and Control Register	151

Section 15. Keyboard Interrupt Module (KBI)

15.1	Contents	153
15.2	Introduction.....	153
15.3	Features	154
15.4	Functional Description	155
15.5	Keyboard Initialization.....	156
15.6	Low-Power Modes	157
15.6.1	Wait Mode	157
15.6.2	Stop Mode	157
15.7	Keyboard Module During Break Interrupts	158
15.8	I/O Registers.....	158
15.8.1	Keyboard Status and Control Register.....	158
15.8.2	Keyboard Interrupt Enable Register.....	160

Section 16. Computer Operating Properly (COP)

16.1	Contents	161
16.2	Introduction.....	162
16.3	Functional Description	162

16.4	I/O Signals	163
16.4.1	CGMXCLK	163
16.4.2	STOP Instruction	163
16.4.3	COPCTL Write	163
16.4.4	Power-On Reset	164
16.4.5	Internal Reset	164
16.4.6	Reset Vector Fetch	164
16.4.7	COPD (COP Disable)	164
16.4.8	COPRS (COP Rate Select)	164
16.5	COP Control Register	164
16.6	Interrupts	165
16.7	Monitor Mode	165
16.8	Low-Power Modes	165
16.8.1	Wait Mode	165
16.8.2	Stop Mode	165
16.9	COP Module During Break Mode	166

Section 17. Monitor ROM (MON)

17.1	Contents	167
17.2	Introduction	167
17.3	Features	168
17.4	Functional Description	168
17.4.1	Entering Monitor Mode	170
17.4.2	Data Format	171
17.4.3	Break Signal	172
17.4.4	Baud Rate	172
17.4.5	Commands	173
17.5	Security	177

Section 18. Break Module (BRK)

18.1	Contents	179
18.2	Introduction	179

Table of Contents

18.3	Features	180
18.4	Functional Description	180
18.4.1	Flag Protection During Break Interrupts	182
18.4.2	CPU During Break Interrupts	182
18.4.3	TIM0I During Break Interrupts	182
18.4.4	COP During Break Interrupts	182
18.5	Low-Power Modes	182
18.5.1	Wait Mode	182
18.5.2	Stop Mode	183
18.6	Break Module Registers	183
18.6.1	Break Status and Control Register	183
18.6.2	Break Address Registers	184
18.6.3	Break Status Register	185
18.6.4	Break Flag Control Register	186

Section 19. Electrical Specifications

19.1	Contents	187
19.2	Introduction	187
19.3	Absolute Maximum Ratings	188
19.4	Functional Operating Range	189
19.5	Thermal Characteristics	189
19.6	3.3-Volt DC Electrical Characteristics	190
19.7	2.0-Volt DC Electrical Characteristics	191
19.8	Control Timing	192
19.9	Oscillator Characteristics	192
19.10	LVI Characteristics	193
19.11	Battery Detection Characteristics	194
19.12	Battery Circuit Component Specifications	194

Section 20. Mechanical Specifications

20.1	Contents	195
20.2	Introduction	195
20.3	Available Packages	195
20.3.1	28-Pin Plastic Dual In-Line Package (Case 710)	196
20.3.2	28-Pin Small Outline Package (Case 751F)	196

Section 21. Ordering Information

21.1	Contents	197
21.2	Introduction	197
21.3	MC Order Numbers	197

Table of Contents

List of Figures

Figure	Title	Page
1-1	MCU Block Diagram for the MC68HC08RC16	26
1-2	DIP and SOIC Pin Assignments	27
1-3	Power Supply Bypassing	28
2-1	Memory Map	32
2-2	Control, Status, and Data Registers	34
5-1	CPU Registers	47
5-2	Accumulator (A)	47
5-3	Index Register (H:X)	48
5-4	Stack Pointer (SP)	48
5-5	Program Counter (PC)	49
5-6	Condition Code Register (CCR)	49
6-1	Reset Block Diagram	62
6-2	External Reset Recovery Timing	65
6-3	Active Reset Recovery Timing	65
6-4	Power-on Reset (POR) Recovery	66
6-5	Reset Status Register (RSR)	67
6-6	Interrupt Stacking Order	70
6-7	Interrupt Recognition Example	71
6-8	Interrupt Processing	72
6-9	Interrupt Status Register 1 (INT1)	75
6-10	Interrupt Status Register 2 (INT2)	76
7-1	External Low-Power Circuit	79
7-2	Internal Low-Battery Detection Block Diagram	80

List of Figures

Figure	Title	Page
8-1	LVI Module Block Diagram	91
8-2	LVI Status Register (LVISR).	92
9-1	Oscillator External Connections	96
10-1	Mask Option Register (MOR)	100
11-1	I/O Port Register Summary.	104
11-2	Port A Data Register (PTA)	105
11-3	Data Direction Register A (DDRA)	105
11-4	Port A I/O Circuit.	106
11-5	Port B Data Register (PTB)	107
11-6	Data Direction Register B (DDRB)	108
11-7	Port B I/O Circuit.	108
11-8	Port C Data Register (PTC)	110
11-9	Data Direction Register C (DDRC)	111
11-10	Port C I/O Circuit.	112
12-1	CMT Clock Generation	115
12-2	Carrier Modulator Transmitter Module Block Diagram	116
12-3	Carrier Generator Block Diagram	119
12-4	Modulator Block Diagram	121
12-5	CMT Operation in Time Mode	122
12-6	Extended Space Operation.	125
12-7	CMT Carrier Generator Data Register (CCH1, CCL1, CCH2, and CCL2)	129
12-8	CMT Modulator Control and Status Register (CMCS)	132
12-9	CMT Modulator Data Registers (CMD1, CMD2, and CMD3).	135
13-1	TIM0I Block Diagram	138
13-2	TIM0I Status and Control Register (TSC).	142
13-3	TIM0I Counter Registers (TCNTH and TCNTL)	144
13-4	TIM0I Counter Modulo Registers (TMODH and TMODL).	145

Figure	Title	Page
14-1	IRQ Module Block Diagram	148
14-2	IRQ Status and Control Register (ISCR)	151
15-1	Keyboard Module Block Diagram	154
15-2	Keyboard Module I/O Register Summary	154
15-3	Keyboard Status and Control Register (KBSCR)	159
15-4	Keyboard Interrupt Enable Register (KBIER)	160
16-1	COP Block Diagram	162
16-2	COP Control Register (COPCTL)	165
17-1	Monitor Mode Circuit.	169
17-2	Monitor Data Format.	171
17-3	Break Transaction.	172
17-4	Read Transaction	173
17-5	Write Transaction	173
17-6	Stack Pointer at Monitor Mode Entry	177
17-7	Monitor Mode Entry Timing.	178
18-1	Break Module Block Diagram	181
18-2	Break Module Register Summary	181
18-3	Break Status and Control Register (BSCR)	183
18-4	Break Address Registers (BRKH and BRKL)	184
18-5	Break Status Register (BSR)	185
18-6	Break Flag Control Register (BFCR)	186

List of Figures

List of Tables

Table	Title	Page
2-1	Vector Addresses	39
5-1	Instruction Set Summary	53
5-2	Opcode Map	60
6-1	Interrupt Sources	73
6-2	Interrupt Source Flags	74
8-1	LVI Digital Filter Characteristics	91
11-1	Port A Pin Functions	106
11-2	Port B Pin Functions	109
11-3	Port C Pin Functions	112
12-1	System Clock Examples	115
12-2	CMT Modes of Operation	118
13-1	TIM0I Register Summary	139
13-2	Prescaler Selection	143
17-1	Monitor Mode Entry	170
17-2	Mode Differences	171
17-3	Monitor Baud Rate Selection	172
17-4	READ (Read Memory) Command	174
17-5	WRITE (Write Memory) Command	174
17-6	IREAD (Indexed Read) Command	175
17-7	IWRITE (Indexed Write) Command	175
17-8	READSP (Read Stack Pointer) Command	176
17-9	RUN (Run User Program) Command	176
21-1	MC Order Numbers	197

List of Tables

Section 1. General Description

1.1 Contents

1.2	Features	24
1.3	MCU Block Diagram	25
1.4	Pin Assignments	27
1.5	Pin Functions	27
1.5.1	V_{DD} and V_{SS}	27
1.5.2	BATT	28
1.5.3	External Interrupt Pin ($\overline{IRQ1}$)	28
1.5.4	OSC1 and OSC2	29
1.5.5	RST	29
1.5.6	IRO	29
1.5.7	Port A Input/Output Pins (PTA7–PTA0)	29
1.5.8	Port B Input/Output Pins (PTB7/ $\overline{KBD7}$ –PTB0/ $\overline{KBD0}$)	29
1.5.9	Port C Input/Output Pins (PTC3–PTC0)	30

1.2 Features

Features of the MC68HC08RC16 include:

- High performance M68HC08 architecture
- Fully upward-compatible object code with M6805, M146805, and M68HC05 Families
- 8-MHz maximum oscillator frequency at 2.0-volt supply
- 16,384 bytes of on-chip read-only memory (ROM)
- ROM memory data security⁽¹⁾
- 352 bytes of on-chip random-access memory (RAM)
- Low-voltage inhibit (LVI) module:
 - 1.8-V detection forces the microprocessor unit (MCU) into low-power state
 - 2.0-V detection sets indicator flag
- Low-power design, fully static with low-power reset, stop, and wait modes
- Battery removal detection circuits
- Computer operating properly (COP) watchdog resets
- Carrier modulator transmitter (CMT) supporting baseband, pulse length modulator (PLM), and frequency shift keying (FSK) protocols
- 16-bit, modulo timer module (TIM01)
- Available packaging:
 - 28-pin plastic dual in-line package (PDIP)
 - 28-pin small-outline integrated circuit package (SOIC)
- 20 bidirectional input/output (I/O) lines
- 8-bit keyboard wakeup port

1. No security feature is absolutely secure. However, Motorola's strategy is to make reading or copying the ROM difficult for unauthorized users.

- High-current infrared (IR) drive pin (IRO)
- High-current port pins (PC0–PC3)

Features of the CPU08 include:

- Enhanced HC05 programming model
- Extensive loop control functions
- 16 addressing modes (eight more than the HC05)
- 16-bit index register and stack pointer
- Memory-to-memory data transfers
- Fast 8×8 multiply instruction
- Fast 16/8 divide instruction
- Binary-coded decimal (BCD) instructions
- Optimization for controller applications
- Third party C language support

1.3 MCU Block Diagram

Figure 1-1 shows the structure of the MC68HC08RC16.

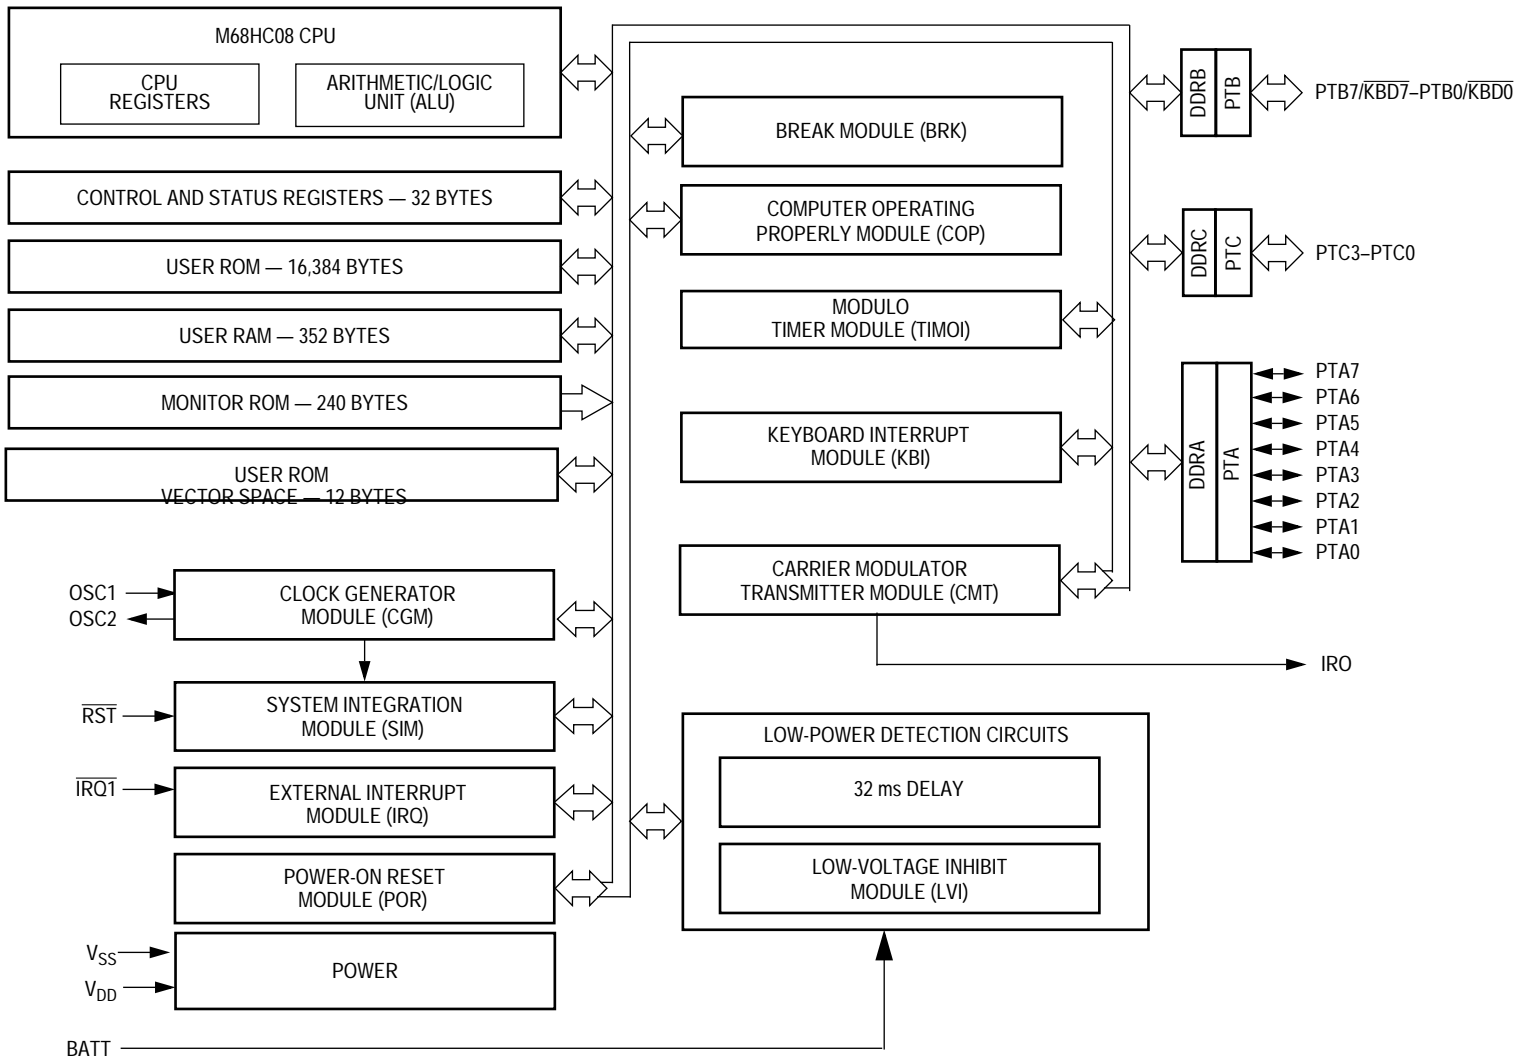


Figure 1-1. MCU Block Diagram for the MC68HC08RC16

1.4 Pin Assignments

Figure 1-2 shows the pin assignments for both the DIP and SOIC packages.

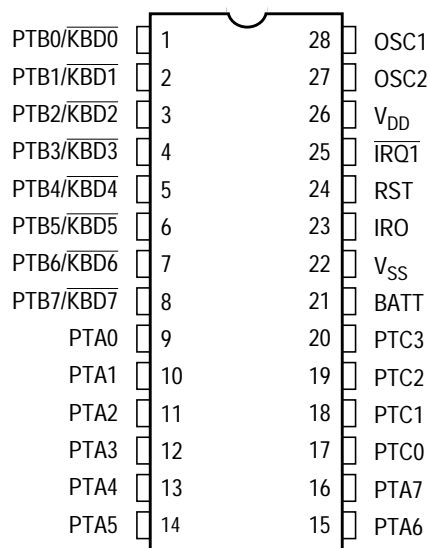


Figure 1-2. DIP and SOIC Pin Assignments

1.5 Pin Functions

This section provides a brief description of the pin functions. Where applicable, references are made to other sections for more detailed information.


1.5.1 V_{DD} and V_{SS}

V_{DD} is the supply node for the MCU. Under normal operation, power is supplied to V_{DD} from the BATT pin through an internal MOSFET device. When the battery is removed, power is temporarily supplied from an external electrolytic capacitor through V_{DD} . V_{SS} is ground.

Fast signal transitions on MCU pins place high, short-duration current demands on the power supply. To prevent noise problems, take special care to provide power supply bypassing at the MCU as **Figure 1-3** shows. Place the C_{VBYP} and C_{BATT} bypass capacitors as close to the

General Description

MCU as possible. Use a high-frequency-response ceramic capacitor for C_{VBYP} and C_{BATT} . C_{VBULK} is used for bulk current requirements in applications that require the port pins to source high current levels during normal operation. C_{VBULK} is also used for RAM retention when batteries are removed.

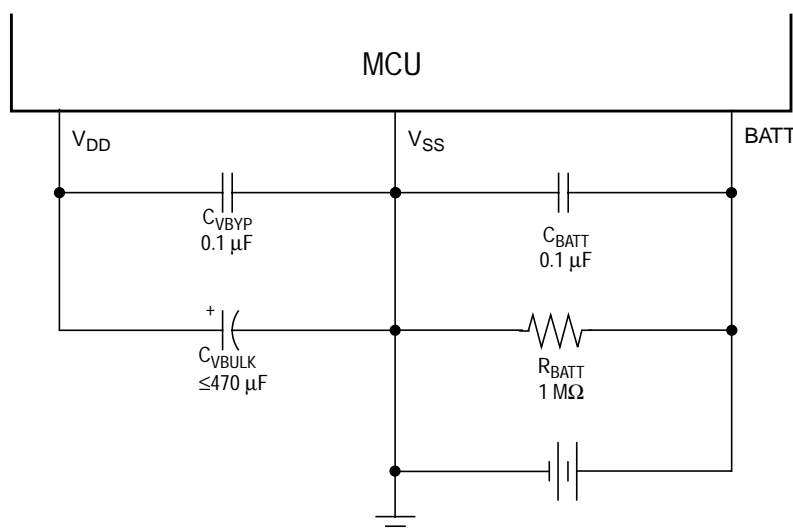

Note: Component values shown represent typical applications.

Figure 1-3. Power Supply Bypassing

1.5.2 BATT

The voltage on BATT is passed to V_{DD} through an internal P-channel MOSFET transistor and supplies power to the MCU. This pin also detects battery removal and insertion. See [Section 7. Low-Power Modes](#).

1.5.3 External Interrupt Pin ($\overline{IRQ1}$)

$\overline{IRQ1}$ is an asynchronous external interrupt pin. See [Section 14. External Interrupt \(IRQ\)](#).

NOTE: The IRQ circuits are powered by the chip V_{DD} . External circuits should drive the pin between V_{DD} and V_{SS} levels. If external circuits use a pullup device on $\overline{IRQ1}$, the pin must be pulled to V_{DD} and **not** to BATT.

1.5.4 OSC1 and OSC2

The OSC1 and OSC2 pins are the connections for the on-chip oscillator circuit. See [Section 7. Low-Power Modes](#).

1.5.5 $\overline{\text{RST}}$

A logic 0 on the $\overline{\text{RST}}$ pin forces the MCU to a known startup state. $\overline{\text{RST}}$ is bidirectional, allowing a reset of the entire system. It is driven low when any internal reset source is asserted. See [Section 6. Resets and Interrupts](#).

NOTE: *The reset circuits are powered by the chip V_{DD} . External circuits should drive the pin through a resistor between V_{DD} and V_{SS} levels. If external circuits use a pullup device on $\overline{\text{RST}}$, the pin must be pulled to V_{DD} and **not** to BATT.*

1.5.6 IRO

The IRO pin is the high-current source and sink output of the carrier modulator transmitter (CMT) subsystem which is suitable for driving infrared (IR) light-emitting diode (LED) biasing logic. See [Section 12. Carrier Modulator Transmitter \(CMT\)](#).

1.5.7 Port A Input/Output Pins (PTA7–PTA0)

PTA7–PTA0 are general-purpose bidirectional I/O port pins. See [Section 11. Input/Output Ports \(I/O\)](#).

1.5.8 Port B Input/Output Pins (PTB7/ $\overline{\text{KBD7}}$ –PTB0/ $\overline{\text{KBD0}}$)

PTB7/ $\overline{\text{KBD7}}$ –PTB0/ $\overline{\text{KBD0}}$ are general-purpose bidirectional I/O port pins. Any or all of the port B lines can be programmed to serve as external interrupt pins with internal pullups. See [Section 11. Input/Output Ports \(I/O\)](#).

1.5.9 Port C Input/Output Pins (PTC3–PTC0)

PTC3–PTC0 are general-purpose bidirectional I/O port pins that have high-current drive capability. The state of any pin is software programmable and all port C lines are configured as input during power-on or reset. See [Section 11. Input/Output Ports \(I/O\)](#).

NOTE: *Any unused inputs and I/O ports should be tied to an appropriate logic level (either V_{DD} or V_{SS}). Although the I/O ports of the MC68HC08RC16 do not require termination, termination is recommended to reduce the possibility of static damage.*

Section 2. Memory Map

2.1 Contents

2.2	Introduction	31
2.3	I/O Section	33
2.4	Monitor ROM (MON).	39

2.2 Introduction

The CPU08 can address 64 Kbytes of memory space. The memory map, shown in **Figure 2-1**, includes:

- 16,384 bytes of read-only memory (ROM)
- 352 bytes of random-access memory (RAM)
- 12 bytes of user-defined vectors
- 240 bytes of monitor ROM (MON)

Memory Map

\$0000 ↓ \$001F	I/O REGISTERS 32 BYTES
\$0020 ↓ \$017F	RAM 352 BYTES
\$0180 ↓ \$BDFF	UNIMPLEMENTED 48,256 BYTES
\$BE00 ↓ \$FDFF	ROM MEMORY 16,384 BYTES
\$FE00	BREAK STATUS REGISTER (BSR)
\$FE01	RESET STATUS REGISTER (RSR)
\$FE02	RESERVED
\$FE03	BREAK FLAG CONTROL REGISTER (BFCR)
\$FE04	INTERRUPT STATUS REGISTER 1 (INT1)
\$FE05 ↓ \$FE0B	RESERVED 7 BYTES
\$FE0C	BREAK ADDRESS HIGH REGISTER (BRKH)
\$FE0D	BREAK ADDRESS LOW REGISTER (BRKL)
\$FE0E	BREAK STATUS AND CONTROL REGISTER (BSCR)
\$FE0F	RESERVED
\$FE10 ↓ \$FEFF	MONITOR ROM 240 BYTES
\$FF00 ↓ \$FF7F	UNIMPLEMENTED 128 BYTES
\$FF80	RESERVED
\$FF81 ↓ \$FFF3	UNIMPLEMENTED 115 BYTES
\$FFF4 ↓ \$FFFE	ROM VECTORS 12 BYTES
\$FFFF	COP CONTROL REGISTER (COPCTL)

Figure 2-1. Memory Map

2.3 I/O Section

Most of the control, status, and data registers are in the zero page area of \$0000–\$001F. Additional input/output (I/O) registers have these addresses:

- \$FE00 — Break status register, BSR
- \$FE01 — Reset status register, RSR
- \$FE03 — Break flag control register, BFCR
- \$FE04 — Interrupt status register 1, INT1
- \$FE0C and \$FE0D — Break address registers, BRKH and BRKL
- \$FE0E — Break status and control register, BSCR
- \$FFFF — Computer operating properly (COP) control register, COPCTL

Memory Map

Addr.	Register Name	Bit 7	6	5	4	3	2	1	Bit 0
\$0000	Port A Data Register (PTA) See page 105 .	Read: PTA7 Write: PTA7	PTA6	PTA5	PTA4	PTA3	PTA2	PTA1	PTA0
		Reset: Unaffected by reset							
\$0001	Port B Data Register (PTB) See page 107 .	Read: PTB7 Write: PTB7	PTB6	PTB5	PTB4	PTB3	PTB2	PTB1	PTB0
		Reset: Unaffected by reset							
\$0002	Port C Data Register (PTC) See page 110 .	Read: [Unimplemented] Write: [Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	PTC3	PTC2	PTC1	PTC0
		Reset: Unaffected by reset							
\$0003	Unimplemented	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]
\$0004	Data Direction Register A (DDRA) See page 105 .	Read: DDRA7 Write: DDRA7	DDRA6	DDRA5	DDRA4	DDRA3	DDRA2	DDRA1	DDRA0
		Reset: 0 0 0 0 0 0 0 0							
\$0005	Data Direction Register B (DDRB) See page 108 .	Read: DDRB7 Write: DDRB7	DDRB6	DDRB5	DDRB4	DDRB3	DDRB2	DDRB1	DDRB0
		Reset: 0 0 0 0 0 0 0 0							
\$0006	Data Direction Register C (DDRC) See page 111 .	Read: [Unimplemented] Write: [Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	DDRC3	DDRC2	DDRC1	DDRC0
		Reset: Unaffected by reset 0 0 0 0							
\$0007	Unimplemented	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]
\$0008	Unimplemented	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]
\$0009	Unimplemented	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]
\$000A	Unimplemented	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]
\$000B	Unimplemented	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]
\$000C	Unimplemented	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]	[Unimplemented]

[Unimplemented] = Unimplemented R = Reserved X = Indeterminate

Figure 2-2. Control, Status, and Data Registers (Sheet 1 of 5)

Addr.	Register Name	Bit 7	6	5	4	3	2	1	Bit 0
\$000D	Keyboard Status and Control Register (KBSCR) See page 159 .	Read: 0	0	0	0	KEYF	0	IMASKK	MODEK
		Write:					ACKK		
		Reset:	0	0	0	0	0	0	0
\$000E	Keyboard Interrupt Enable Register (KBIER) See page 160 .	Read: KBIE7	KBIE6	KBIE5	KBIE4	KBIE3	KBIE2	KBIE1	KBIE0
		Write:							
		Reset:	0	0	0	0	0	0	0
\$000F	IRQ Status and Control Register (ISCR) See page 151 .	Read: 0	0	0	0	IRQF1	0	IMASK1	MODE1
		Write:					ACK1		
		Reset:	0	0	0	0	0	0	0
\$0010	CMT Carrier Generator High Data Register 1 (CCH1) See page 129 .	Read: IROLN	CMPOL	PH5	PH4	PH3	PH2	PH1	PH0
		Write:							
		Reset:	0	0	Unaffected by reset				
\$0011	CMT Carrier Generator Low Data Register 1 (CCL1) See page 129 .	Read: IROLP	0	PL5	PL4	PL3	PL2	PL1	PL0
		Write:							
		Reset:	0	0	Unaffected by reset				
\$0012	CMT Carrier Generator High Data Register 2 (CCH2) See page 129 .	Read: 0	0	SH5	SH4	SH3	SH2	SH1	SH0
		Write:							
		Reset:	0	0	Unaffected by reset				
\$0013	CMT Carrier Generator Low Data Register 2 (CCL2) See page 129 .	Read: 0	0	SL5	SL4	SL3	SL2	SL1	SL0
		Write:							
		Reset:	0	0	Unaffected by reset				
\$0014	CMT Modulator Control and Status Register (CMCS) See page 132 .	Read: EOCF	DIV2	0	EXSPC	BASE	MODE	EOCIE	MCGEN
		Write:							
		Reset:	0	0	0	0	0	0	0
\$0015	CMT Modulator Data Register 1 (CMD1) See page 135 .	Read: MB11	MB10	MB9	MB8	SB11	SB10	SB9	SB8
		Write:							
		Reset:	Unaffected by reset						

= Unimplemented
 R = Reserved
 X = Indeterminate

Figure 2-2. Control, Status, and Data Registers (Sheet 2 of 5)

Memory Map

Addr.	Register Name		Bit 7	6	5	4	3	2	1	Bit 0
\$0016	CMT Modulator Data Register 2 (CMD2) See page 135 .	Read:	MB7	MB6	MB5	MB4	MB3	MB2	MB1	MB0
		Write:								
		Reset:	Unaffected by reset							
\$0017	CMT Modulator Data Register 3 (CMD3) See page 135 .	Read:	SB7	SB6	SB5	SB4	SB3	SB2	SB1	SB0
		Write:								
		Reset:	Unaffected by reset							
\$0018	TIMOI Status and Control Register (TSC) See page 142 .	Read:	TOF	TOIE	TSTOP	0	0	PS2	PS1	PS0
		Write:	0			TRST				
		Reset:	0	0	1	0	0	0	0	0
\$0019	TIMOI Counter Register High (TCNTH) See page 144 .	Read:	Bit 15	14	13	12	11	10	9	Bit 8
		Write:								
		Reset:	0	0	0	0	0	0	0	0
\$001A	TIMOI Counter Register Low (TCNTL) See page 144 .	Read:	Bit 7	6	5	4	3	2	1	Bit 0
		Write:								
		Reset:	0	0	0	0	0	0	0	0
\$001B	TIMOI Counter Modulo Register High (TMODH) See page 145 .	Read:	Bit 15	14	13	12	11	10	9	Bit 8
		Write:								
		Reset:	1	1	1	1	1	1	1	1
\$001C	TIMOI Counter Modulo Register Low (TMODL) See page 145 .	Read:	Bit 7	6	5	4	3	2	1	Bit 0
		Write:								
		Reset:	1	1	1	1	1	1	1	1
\$001D	LVI Status Register (LVISR) See page 92 .	Read:	R	R	LOWV	0	0	0	0	R
		Write:								
		Reset:	0	0	0	0	0	0	0	0
\$001E	Unimplemented									
			= Unimplemented			R	= Reserved		X = Indeterminate	

Figure 2-2. Control, Status, and Data Registers (Sheet 3 of 5)

Addr.	Register Name		Bit 7	6	5	4	3	2	1	Bit 0
\$001F	Mask Option Register (MOR) See page 100 .	Read:	0	0	0	ROMSEC	SSREC	COPRS	STOP	COPD
		Write:								
		Reset:	Unaffected by reset							
\$FE00	Break Status Register (BSR) See page 183 .	Read:	0	0	0	1	0	0	BW	0
		Write:	R	R	R	R	R	R	Note	R
		Reset:	0	0	0	1	0	0	0	0
Note: Writing a logic 0 clears BW.										
\$FE01	Reset Status Register (RSR) See page 67 .	Read:	POR	PIN	COP	ILOP	ILAD	0	LPRST	0
		Write:								
		POR:	1	X	0	0	0	0	1	0
\$FE02	Unimplemented									
\$FE03	Break Flag Control Register (BFCR) See page 186 .	Read:	BCFE	R	R	R	R	R	R	R
		Write:								
		Reset:	0							
\$FE04	Interrupt Status Register 1 (INT1) See page 75 .	Read:	IF6	IF5	IF4	IF3	IF2	IF1	0	0
		Write:	R	R	R	R	R	R	R	R
		Reset:	0	0	0	0	0	0	0	0
\$FE05	Interrupt Status Register 2 (INT2) See page 76 .	Read:	IF14	IF13	IF12	IF11	IF10	IF9	IF8	IF7
		Write:	R	R	R	R	R	R	R	R
		Reset:	0	0	0	0	0	0	0	0
\$FE06	Reserved		R	R	R	R	R	R	R	R
\$FE07	Unimplemented									
\$FE08	Reserved		R	R	R	R	R	R	R	R
\$FE09	Unimplemented									
				= Unimplemented		R	= Reserved		X = Indeterminate	

Figure 2-2. Control, Status, and Data Registers (Sheet 4 of 5)

Memory Map

Addr.	Register Name	Bit 7	6	5	4	3	2	1	Bit 0
\$FE0A	Unimplemented								
\$FE0B	Unimplemented								
\$FE0C	Break Address Register High (BRKH) See page 184 .	Read:	14	13	12	11	10	9	Bit 8
		Write:	Bit 15						
		Reset:	0	0	0	0	0	0	0
\$FE0D	Break Address Register Low (BRKL) See page 184 .	Read:	6	5	4	3	2	1	Bit 0
		Write:	Bit 7						
		Reset:	0	0	0	0	0	0	0
\$FE0E	Break Status and Control Register (BSCR) See page 183 .	Read:	BRKE	BRKA	0	0	0	0	0
		Write:							
		Reset:	0	0	0	0	0	0	0
\$FFFF	COP Control Register (COPCTL) See page 165 .	Read:	Low byte of reset vector						
		Write:	Writing clears COP counter (any value)						
		Reset:	Unaffected by reset						

= Unimplemented
 R = Reserved
 X = Indeterminate

Figure 2-2. Control, Status, and Data Registers (Sheet 5 of 5)

Table 2-1 is a list of vector locations.

Table 2-1. Vector Addresses

<div> <div>Low</div> <div>↑</div> <div>Priority</div> <div>↓</div> <div>High</div> </div>	Address	Vector
	\$FFF4	Keyboard vector (high)
	\$FFF5	Keyboard vector (low)
	\$FFF6	TIM overflow vector (high)
	\$FFF7	TIM overflow vector (low)
	\$FFF8	CMT vector (high)
	\$FFF9	CMT vector (low)
	\$FFFA	IRQ1 vector (high)
	\$FFFFB	IRQ1 vector (low)
	\$FFFC	SWI vector (high)
	\$FFFD	SWI vector (low)
	\$FFFE	Reset vector (high)
	\$FFFF	Reset vector (low)

2.4 Monitor ROM (MON)

The 240 bytes at addresses \$FE10–\$FEFF are reserved ROM addresses that contain the instructions for the monitor functions.

Section 3. Random-Access Memory (RAM)

3.1 Contents

3.2	Introduction	41
3.3	Functional Description	41

3.2 Introduction

This section describes the 352 bytes of random-access memory (RAM).

3.3 Functional Description

Addresses \$0020–\$017F are RAM locations. The location of the stack RAM is programmable. The 16-bit stack pointer allows the stack to be anywhere in the 64-Kbyte memory space.

NOTE: *For correct operation, the stack pointer must point only to RAM locations.*

Within page zero are 224 bytes of RAM. Because the location of the stack RAM is programmable, all page zero RAM locations can be used for input/output (I/O) control and user data or code. When the stack pointer is moved from its reset location at \$00FF out of page zero, direct addressing mode instructions can efficiently access all page zero RAM locations. Page zero RAM, therefore, provides ideal locations for frequently accessed global variables.

Before processing an interrupt, the central processor unit (CPU) uses five bytes of the stack to save the contents of the CPU registers.

NOTE: *For M6805 compatibility, the H register is not stacked.*

Random-Access Memory (RAM)

During a subroutine call, the CPU uses two bytes of the stack to store the return address. The stack pointer decrements during pushes and increments during pulls.

NOTE: *Be careful when using nested subroutines. The CPU may overwrite data in the RAM during a subroutine or during the interrupt stacking operation.*

Section 4. Read-Only Memory (ROM)

4.1 Contents

4.2	Introduction	43
4.3	Functional Description	43

4.2 Introduction

This section describes the 16 Kbytes of read-only memory (ROM) and 12 bytes of user vectors.

4.3 Functional Description

An unprogrammed location reads as \$00. These addresses are user ROM locations:

- \$BE00–\$FDFF
- \$FFF4–\$FFFF — Reserved for user-defined interrupt and reset vectors

NOTE: *A security feature prevents viewing of the ROM contents.⁽¹⁾*

1. No security feature is absolutely secure. However, Motorola's strategy is to make reading or copying the ROM contents difficult for unauthorized users.

Section 5. Central Processor Unit (CPU)

5.1 Contents

5.2	Introduction	46
5.3	Features	46
5.4	CPU Registers	46
5.4.1	Accumulator	47
5.4.2	Index Register	47
5.4.3	Stack Pointer	48
5.4.4	Program Counter	49
5.4.5	Condition Code Register	49
5.5	Arithmetic/Logic Unit (ALU)	51
5.6	Low-Power Modes	51
5.6.1	Wait Mode	52
5.6.2	Stop Mode	52
5.7	CPU During Break Interrupts	52
5.8	Instruction Set Summary	52
5.9	Opcode Map	59

5.2 Introduction

The M68HC08 CPU is an enhanced and fully object-code-compatible version of the M68HC05 CPU. The *CPU08 Reference Manual*, Motorola document order number CPU08RM/AD, contains a description of the CPU instruction set, addressing modes, and architecture.

5.3 Features

Features of the CPU include:

- Object code fully upward-compatible with M68HC05 Family
- 16-bit stack pointer with stack manipulation instructions
- 16-bit index register with X-register manipulation instructions
- 8-MHz CPU internal bus frequency
- 64-Kbyte program/data memory space
- 16 addressing modes
- Memory-to-memory data moves without using accumulator
- Fast 8-bit by 8-bit multiply and 16-bit by 8-bit divide instructions
- Enhanced binary-coded decimal (BCD) data handling
- Modular architecture with expandable internal bus definition for extension of addressing range beyond 64 Kbytes
- Low-power stop and wait modes

5.4 CPU Registers

Figure 5-1 shows the five CPU registers. CPU registers are not part of the memory map.

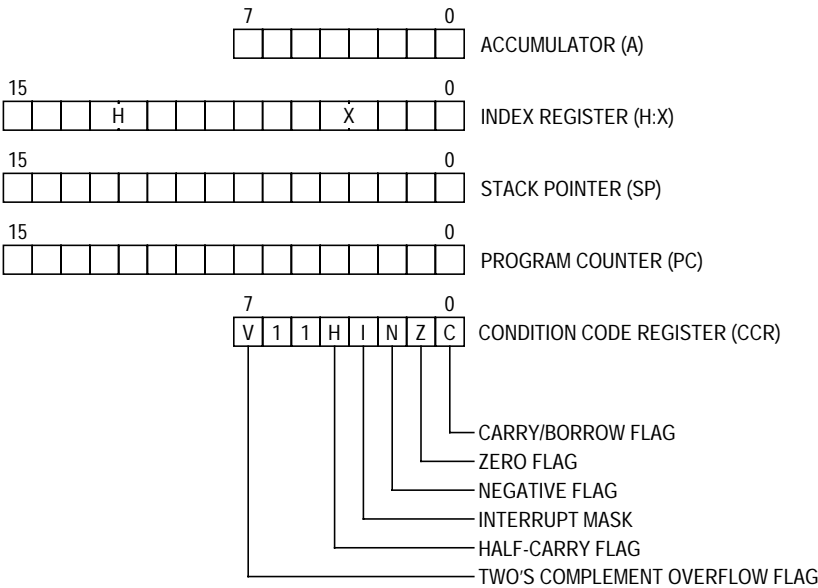


Figure 5-1. CPU Registers

5.4.1 Accumulator

The accumulator is a general-purpose 8-bit register. The CPU uses the accumulator to hold operands and the results of arithmetic/logic operations.

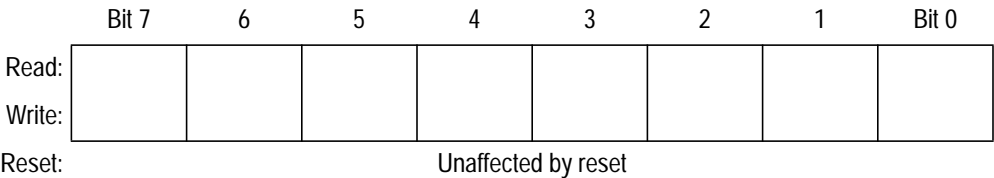


Figure 5-2. Accumulator (A)

5.4.2 Index Register

The 16-bit index register allows indexed addressing of a 64-Kbyte memory space. H is the upper byte of the index register, and X is the lower byte. H:X is the concatenated 16-bit index register.

In the indexed addressing modes, the CPU uses the contents of the index register to determine the conditional address of the operand.

The index register can serve also as a temporary data storage location.

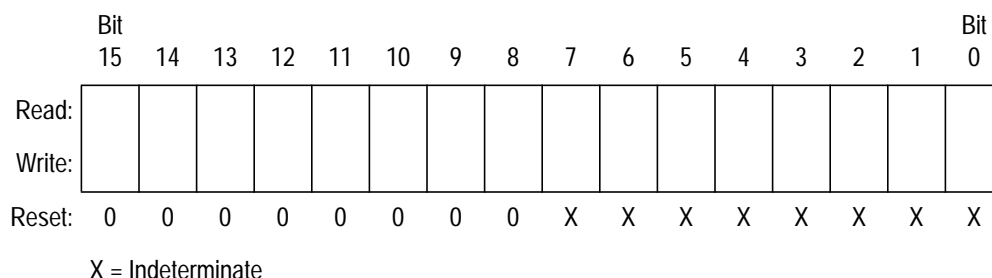


Figure 5-3. Index Register (H:X)

5.4.3 Stack Pointer

The stack pointer is a 16-bit register that contains the address of the next location on the stack. During a reset, the stack pointer is preset to \$00FF. The reset stack pointer (RSP) instruction sets the least significant byte (LSB) to \$FF and does not affect the most significant byte (MSB). The stack pointer decrements as data is pushed onto the stack and increments as data is pulled from the stack.

In the stack pointer 8-bit offset and 16-bit offset addressing modes, the stack pointer can function as an index register to access data on the stack. The CPU uses the contents of the stack pointer to determine the conditional address of the operand.

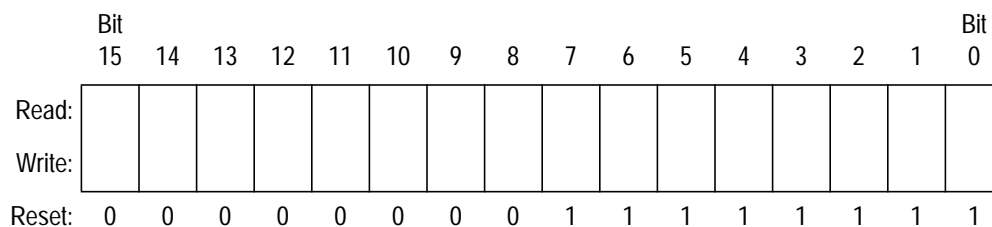


Figure 5-4. Stack Pointer (SP)

NOTE: For correct operation, the stack pointer must point only to RAM locations.

5.4.4 Program Counter

The program counter is a 16-bit register that contains the address of the next instruction or operand to be fetched.

Normally, the program counter automatically increments to the next sequential memory location every time an instruction or operand is fetched. Jump, branch, and interrupt operations load the program counter with an address other than that of the next sequential location.

During reset, the program counter is loaded with the reset vector address located at \$FFFE and \$FFFF. The vector address is the address of the first instruction to be executed after exiting the reset state.

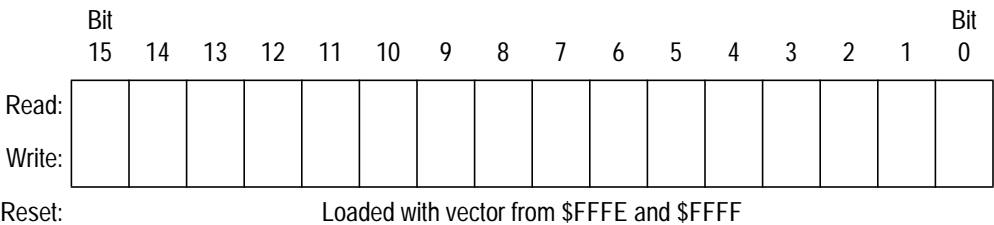


Figure 5-5. Program Counter (PC)

5.4.5 Condition Code Register

The 8-bit condition code register contains the interrupt mask and five flags that indicate the results of the instruction just executed. Bits 6 and 5 are set permanently to logic 1. The following paragraphs describe the functions of the condition code register.

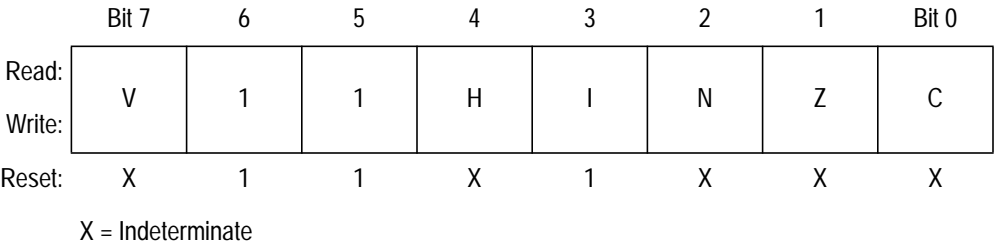


Figure 5-6. Condition Code Register (CCR)

V — Overflow Flag

The CPU sets the overflow flag when a two's complement overflow occurs. The signed branch instructions BGT, BGE, BLE, and BLT use the overflow flag.

1 = Overflow

0 = No overflow

H — Half-Carry Flag

The CPU sets the half-carry flag when a carry occurs between accumulator bits 3 and 4 during an add-without-carry (ADD) or add-with-carry (ADC) operation. The half-carry flag is required for binary-coded decimal (BCD) arithmetic operations. The DAA instruction uses the states of the H and C flags to determine the appropriate correction factor.

1 = Carry between bits 3 and 4

0 = No carry between bits 3 and 4

I — Interrupt Mask

When the interrupt mask is set, all maskable CPU interrupts are disabled. CPU interrupts are enabled when the interrupt mask is cleared. When a CPU interrupt occurs, the interrupt mask is set automatically after the CPU registers are saved on the stack, but before the interrupt vector is fetched.

1 = Interrupts disabled

0 = Interrupts enabled

NOTE: *To maintain M6805 compatibility, the upper byte of the index register (H) is not stacked automatically. If the interrupt service routine modifies H, then the user must stack and unstack H using the PSHH and PULH instructions.*

After the I bit is cleared, the highest-priority interrupt request is serviced first.

A return-from-interrupt (RTI) instruction pulls the CPU registers from the stack and restores the interrupt mask from the stack. After any reset, the interrupt mask is set and can be cleared only by the clear interrupt mask software instruction (CLI).

N — Negative Flag

The CPU sets the negative flag when an arithmetic operation, logic operation, or data manipulation produces a negative result, setting bit 7 of the result.

- 1 = Negative result
- 0 = Non-negative result

Z — Zero Flag

The CPU sets the zero flag when an arithmetic operation, logic operation, or data manipulation produce a result of \$00.

- 1 = Zero result
- 0 = Non-zero result

C — Carry/Borrow Flag

The CPU sets the carry/borrow flag when an addition operation produces a carry out of bit 7 of the accumulator or when a subtraction operation requires a borrow. Some instructions — such as bit test and branch, shift, and rotate — also clear or set the carry/borrow flag.

- 1 = Carry out of bit 7
- 0 = No carry out of bit 7

5.5 Arithmetic/Logic Unit (ALU)

The ALU performs the arithmetic and logic operations defined by the instruction set.

Refer to the *CPU08 Reference Manual*, Motorola document order number CPU08RM/AD, for a description of the instructions and addressing modes and more detail about the architecture of the CPU.

5.6 Low-Power Modes

The WAIT and STOP instructions put the MCU in low power-consumption standby modes.

5.6.1 Wait Mode

The WAIT instruction:

- Clears the interrupt mask (I bit) in the condition code register, enabling interrupts. After exit from wait mode by interrupt, the I bit remains clear. After exit by reset, the I bit is set.
- Disables the CPU clock

5.6.2 Stop Mode

The STOP instruction:

- Clears the interrupt mask (I bit) in the condition code register, enabling external interrupts. After exit from stop mode by external interrupt, the I bit remains clear. After exit by reset, the I bit is set.
- Disables the CPU clock

After exiting stop mode, the CPU clock begins running after the oscillator stabilization delay.

5.7 CPU During Break Interrupts

If the break module is enabled, a break interrupt causes the CPU to execute the software interrupt instruction (SWI) at the completion of the current CPU instruction. (See [Section 18. Break Module \(BRK\)](#).) The program counter vectors to \$FFFC–\$FFFD (\$FEFC–\$FEFD in monitor mode).

A return-from-interrupt instruction (RTI) in the break routine ends the break interrupt and returns the MCU to normal operation if the break interrupt has been deasserted.

5.8 Instruction Set Summary

[Table 5-1](#) provides a summary of the M68HC08 instruction set.

Table 5-1. Instruction Set Summary (Sheet 1 of 7)



Source Form	Operation	Description	Effect on CCR						Address Mode	Opcode	Operand	Cycles
			V	H	I	N	Z	C				
ADC #opr ADC opr ADC opr ADC opr,X ADC opr,X ADC ,X ADC opr,SP ADC opr,SP	Add with Carry	$A \leftarrow (A) + (M) + (C)$	↑	↑	—	↑	↑	↑	IMM DIR EXT IX2 IX1 IX SP1 SP2	A9 B9 C9 D9 E9 F9 9EE9 9ED9	ii dd hh ll ee ff ff ff ff ee ff	2 3 4 4 3 2 4 5
ADD #opr ADD opr ADD opr ADD opr,X ADD opr,X ADD ,X ADD opr,SP ADD opr,SP	Add without Carry	$A \leftarrow (A) + (M)$	↑	↑	—	↑	↑	↑	IMM DIR EXT IX2 IX1 IX SP1 SP2	AB BB CB DB EB FB 9EEB 9EDB	ii dd hh ll ee ff ff ff ff ee ff	2 3 4 4 3 2 4 5
AIS #opr	Add Immediate Value (Signed) to SP	$SP \leftarrow (SP) + (16 \ll M)$	—	—	—	—	—	—	IMM	A7	ii	2
AIX #opr	Add Immediate Value (Signed) to H:X	$H:X \leftarrow (H:X) + (16 \ll M)$	—	—	—	—	—	—	IMM	AF	ii	2
AND #opr AND opr AND opr AND opr,X AND opr,X AND ,X AND opr,SP AND opr,SP	Logical AND	$A \leftarrow (A) \& (M)$	0	—	—	↑	↑	—	IMM DIR EXT IX2 IX1 IX SP1 SP2	A4 B4 C4 D4 E4 F4 9EE4 9ED4	ii dd hh ll ee ff ff ff ff ee ff	2 3 4 4 3 2 4 5
ASL opr ASLA ASLX ASL opr,X ASL ,X ASL opr,SP	Arithmetic Shift Left (Same as LSL)		↑	—	—	↑	↑	↑	DIR INH INH IX1 IX SP1	38 48 58 68 78 9E68	dd ff ff	4 1 1 4 3 5
ASR opr ASRA ASRX ASR opr,X ASR opr,X ASR opr,SP	Arithmetic Shift Right		↑	—	—	↑	↑	↑	DIR INH INH IX1 IX SP1	37 47 57 67 77 9E67	dd ff ff	4 1 1 4 3 5
BCC rel	Branch if Carry Bit Clear	$PC \leftarrow (PC) + 2 + rel ? (C) = 0$	—	—	—	—	—	—	REL	24	rr	3
BCLR n, opr	Clear Bit n in M	$M_n \leftarrow 0$	—	—	—	—	—	—	DIR (b0) DIR (b1) DIR (b2) DIR (b3) DIR (b4) DIR (b5) DIR (b6) DIR (b7)	11 13 15 17 19 1B 1D 1F	dd dd dd dd dd dd dd dd	4 4 4 4 4 4 4 4
BCS rel	Branch if Carry Bit Set (Same as BLO)	$PC \leftarrow (PC) + 2 + rel ? (C) = 1$	—	—	—	—	—	—	REL	25	rr	3
BEQ rel	Branch if Equal	$PC \leftarrow (PC) + 2 + rel ? (Z) = 1$	—	—	—	—	—	—	REL	27	rr	3
BGE opr	Branch if Greater Than or Equal To (Signed Operands)	$PC \leftarrow (PC) + 2 + rel ? (N \oplus V) = 0$	—	—	—	—	—	—	REL	90	rr	3
BGT opr	Branch if Greater Than (Signed Operands)	$PC \leftarrow (PC) + 2 + rel ? (Z) (N \oplus V) = 0$	—	—	—	—	—	—	REL	92	rr	3

Table 5-1. Instruction Set Summary (Sheet 2 of 7)

Source Form	Operation	Description	Effect on CCR						Address Mode	Opcode	Operand	Cycles
			V	H	I	N	Z	C				
BHCC <i>rel</i>	Branch if Half Carry Bit Clear	$PC \leftarrow (PC) + 2 + rel ? (H) = 0$	–	–	–	–	–	–	REL	28	rr	3
BHCS <i>rel</i>	Branch if Half Carry Bit Set	$PC \leftarrow (PC) + 2 + rel ? (H) = 1$	–	–	–	–	–	–	REL	29	rr	3
BHI <i>rel</i>	Branch if Higher	$PC \leftarrow (PC) + 2 + rel ? (C) \mid (Z) = 0$	–	–	–	–	–	–	REL	22	rr	3
BHS <i>rel</i>	Branch if Higher or Same (Same as BCC)	$PC \leftarrow (PC) + 2 + rel ? (C) = 0$	–	–	–	–	–	–	REL	24	rr	3
BIH <i>rel</i>	Branch if \overline{IRQ} Pin High	$PC \leftarrow (PC) + 2 + rel ? \overline{IRQ} = 1$	–	–	–	–	–	–	REL	2F	rr	3
BIL <i>rel</i>	Branch if \overline{IRQ} Pin Low	$PC \leftarrow (PC) + 2 + rel ? \overline{IRQ} = 0$	–	–	–	–	–	–	REL	2E	rr	3
BIT # <i>opr</i> BIT <i>opr</i> BIT <i>opr</i> BIT <i>opr</i> ,X BIT <i>opr</i> ,X BIT ,X BIT <i>opr</i> ,SP BIT <i>opr</i> ,SP	Bit Test	(A) & (M)	0	–	–	↑	↑	–	IMM DIR EXT IX2 IX1 IX SP1 SP2	A5 B5 C5 D5 E5 F5 9EE5 9ED5	ii dd hh ll ee ff ff ff ff ff	2 3 4 4 3 2 4 5
BLE <i>opr</i>	Branch if Less Than or Equal To (Signed Operands)	$PC \leftarrow (PC) + 2 + rel ? (Z) \mid (N \oplus V) = 1$	–	–	–	–	–	–	REL	93	rr	3
BLO <i>rel</i>	Branch if Lower (Same as BCS)	$PC \leftarrow (PC) + 2 + rel ? (C) = 1$	–	–	–	–	–	–	REL	25	rr	3
BLS <i>rel</i>	Branch if Lower or Same	$PC \leftarrow (PC) + 2 + rel ? (C) \mid (Z) = 1$	–	–	–	–	–	–	REL	23	rr	3
BLT <i>opr</i>	Branch if Less Than (Signed Operands)	$PC \leftarrow (PC) + 2 + rel ? (N \oplus V) = 1$	–	–	–	–	–	–	REL	91	rr	3
BMC <i>rel</i>	Branch if Interrupt Mask Clear	$PC \leftarrow (PC) + 2 + rel ? (I) = 0$	–	–	–	–	–	–	REL	2C	rr	3
BMI <i>rel</i>	Branch if Minus	$PC \leftarrow (PC) + 2 + rel ? (N) = 1$	–	–	–	–	–	–	REL	2B	rr	3
BMS <i>rel</i>	Branch if Interrupt Mask Set	$PC \leftarrow (PC) + 2 + rel ? (I) = 1$	–	–	–	–	–	–	REL	2D	rr	3
BNE <i>rel</i>	Branch if Not Equal	$PC \leftarrow (PC) + 2 + rel ? (Z) = 0$	–	–	–	–	–	–	REL	26	rr	3
BPL <i>rel</i>	Branch if Plus	$PC \leftarrow (PC) + 2 + rel ? (N) = 0$	–	–	–	–	–	–	REL	2A	rr	3
BRA <i>rel</i>	Branch Always	$PC \leftarrow (PC) + 2 + rel$	–	–	–	–	–	–	REL	20	rr	3
BRCLR <i>n,opr,rel</i>	Branch if Bit <i>n</i> in M Clear	$PC \leftarrow (PC) + 3 + rel ? (Mn) = 0$	–	–	–	–	–	↑	DIR (b0) DIR (b1) DIR (b2) DIR (b3) DIR (b4) DIR (b5) DIR (b6) DIR (b7)	01 03 05 07 09 0B 0D 0F	dd rr dd rr dd rr dd rr dd rr dd rr dd rr dd rr	5 5 5 5 5 5 5 5
BRN <i>rel</i>	Branch Never	$PC \leftarrow (PC) + 2$	–	–	–	–	–	–	REL	21	rr	3
BRSET <i>n,opr,rel</i>	Branch if Bit <i>n</i> in M Set	$PC \leftarrow (PC) + 3 + rel ? (Mn) = 1$	–	–	–	–	–	↑	DIR (b0) DIR (b1) DIR (b2) DIR (b3) DIR (b4) DIR (b5) DIR (b6) DIR (b7)	00 02 04 06 08 0A 0C 0E	dd rr dd rr dd rr dd rr dd rr dd rr dd rr dd rr	5 5 5 5 5 5 5 5

Table 5-1. Instruction Set Summary (Sheet 3 of 7)

Source Form	Operation	Description	Effect on CCR						Address Mode	Opcode	Operand	Cycles
			V	H	I	N	Z	C				
BSET <i>n,opr</i>	Set Bit <i>n</i> in <i>M</i>	$M_n \leftarrow 1$	–	–	–	–	–	–	DIR (b0) DIR (b1) DIR (b2) DIR (b3) DIR (b4) DIR (b5) DIR (b6) DIR (b7)	10 12 14 16 18 1A 1C 1E	dd dd dd dd dd dd dd dd	4 4 4 4 4 4 4 4
BSR <i>rel</i>	Branch to Subroutine	$PC \leftarrow (PC) + 2$; push (PCL) $SP \leftarrow (SP) - 1$; push (PCH) $SP \leftarrow (SP) - 1$ $PC \leftarrow (PC) + rel$	–	–	–	–	–	–	REL	AD	rr	4
CBEQ <i>opr,rel</i> CBEQA <i>#opr,rel</i> CBEQX <i>#opr,rel</i> CBEQ <i>opr,X+,rel</i> CBEQ <i>X+,rel</i> CBEQ <i>opr,SP,rel</i>	Compare and Branch if Equal	$PC \leftarrow (PC) + 3 + rel$? (A) – (M) = \$00 $PC \leftarrow (PC) + 3 + rel$? (A) – (M) = \$00 $PC \leftarrow (PC) + 3 + rel$? (X) – (M) = \$00 $PC \leftarrow (PC) + 3 + rel$? (A) – (M) = \$00 $PC \leftarrow (PC) + 2 + rel$? (A) – (M) = \$00 $PC \leftarrow (PC) + 4 + rel$? (A) – (M) = \$00	–	–	–	–	–	–	DIR IMM IMM IX1+ IX+ SP1	31 41 51 61 71 9E61	dd rr ii rr ii rr ff rr rr ff rr	5 4 4 5 4 6
CLC	Clear Carry Bit	$C \leftarrow 0$	–	–	–	–	–	0	INH	98		1
CLI	Clear Interrupt Mask	$I \leftarrow 0$	–	–	0	–	–	–	INH	9A		2
CLR <i>opr</i> CLRA CLRX CLR H CLR <i>opr,X</i> CLR <i>,X</i> CLR <i>opr,SP</i>	Clear	$M \leftarrow \$00$ $A \leftarrow \$00$ $X \leftarrow \$00$ $H \leftarrow \$00$ $M \leftarrow \$00$ $M \leftarrow \$00$ $M \leftarrow \$00$	0	–	–	0	1	–	DIR INH INH INH IX1 IX SP1	3F 4F 5F 8C 6F 7F 9E6F	dd ff ff ff	3 1 1 1 3 2 4
CMP <i>#opr</i> CMP <i>opr</i> CMP <i>opr</i> CMP <i>opr,X</i> CMP <i>opr,X</i> CMP <i>,X</i> CMP <i>opr,SP</i> CMP <i>opr,SP</i>	Compare A with M	(A) – (M)	↑	–	–	↑	↑	↑	IMM DIR EXT IX2 IX1 IX SP1 SP2	A1 B1 C1 D1 E1 F1 9EE1 9ED1	ii dd hh ll ee ff ff ff ff ee ff	2 3 4 4 3 2 4 5
COM <i>opr</i> COMA COMX COM <i>opr,X</i> COM <i>,X</i> COM <i>opr,SP</i>	Complement (One's Complement)	$M \leftarrow (\overline{M}) = \$FF - (M)$ $A \leftarrow (\overline{A}) = \$FF - (M)$ $X \leftarrow (\overline{X}) = \$FF - (M)$ $M \leftarrow (\overline{M}) = \$FF - (M)$ $M \leftarrow (\overline{M}) = \$FF - (M)$ $M \leftarrow (\overline{M}) = \$FF - (M)$	0	–	–	↑	↑	1	DIR INH INH IX1 IX SP1	33 43 53 63 73 9E63	dd ff ff ff	4 1 1 4 3 5
CPHX <i>#opr</i> CPHX <i>opr</i>	Compare H:X with M	(H:X) – (M:M + 1)	↑	–	–	↑	↑	↑	IMM DIR	65 75	ii ii+1 dd	3 4
CPX <i>#opr</i> CPX <i>opr</i> CPX <i>opr</i> CPX <i>,X</i> CPX <i>opr,X</i> CPX <i>opr,X</i> CPX <i>opr,SP</i> CPX <i>opr,SP</i>	Compare X with M	(X) – (M)	↑	–	–	↑	↑	↑	IMM DIR EXT IX2 IX1 IX SP1 SP2	A3 B3 C3 D3 E3 F3 9EE3 9ED3	ii dd hh ll ee ff ff ff ff ee ff	2 3 4 4 3 2 4 5
DAA	Decimal Adjust A	(A) ₁₀	U	–	–	↑	↑	↑	INH	72		2

Table 5-1. Instruction Set Summary (Sheet 4 of 7)

Source Form	Operation	Description	Effect on CCR						Address Mode	Opcode	Operand	Cycles
			V	H	I	N	Z	C				
DBNZ <i>opr,rel</i> DBNZA <i>rel</i> DBNZX <i>rel</i> DBNZ <i>opr,X,rel</i> DBNZ <i>X,rel</i> DBNZ <i>opr,SP,rel</i>	Decrement and Branch if Not Zero	$A \leftarrow (A) - 1$ or $M \leftarrow (M) - 1$ or $X \leftarrow (X) - 1$ $PC \leftarrow (PC) + 3 + rel ? (result) \neq 0$ $PC \leftarrow (PC) + 2 + rel ? (result) \neq 0$ $PC \leftarrow (PC) + 2 + rel ? (result) \neq 0$ $PC \leftarrow (PC) + 3 + rel ? (result) \neq 0$ $PC \leftarrow (PC) + 2 + rel ? (result) \neq 0$ $PC \leftarrow (PC) + 4 + rel ? (result) \neq 0$	-	-	-	-	-	-	DIR INH INH IX1 IX SP1	3B 4B 5B 6B 7B 9E6B	dd rr rr rr ff rr rr rr ff rr	5 3 3 5 4 6
DEC <i>opr</i> DECA DECX DEC <i>opr,X</i> DEC <i>,X</i> DEC <i>opr,SP</i>	Decrement	$M \leftarrow (M) - 1$ $A \leftarrow (A) - 1$ $X \leftarrow (X) - 1$ $M \leftarrow (M) - 1$ $M \leftarrow (M) - 1$ $M \leftarrow (M) - 1$	↑	-	-	↑	↑	-	DIR INH INH IX1 IX SP1	3A 4A 5A 6A 7A 9E6A	dd ff ff	4 1 1 4 3 5
DIV	Divide	$A \leftarrow (H:A)/(X)$ $H \leftarrow \text{Remainder}$	-	-	-	-	↑	↑	INH	52		7
EOR # <i>opr</i> EOR <i>opr</i> EOR <i>opr</i> EOR <i>opr,X</i> EOR <i>opr,X</i> EOR <i>,X</i> EOR <i>opr,SP</i> EOR <i>opr,SP</i>	Exclusive OR M with A	$A \leftarrow (A \oplus M)$	0	-	-	↑	↑	-	IMM DIR EXT IX2 IX1 IX SP1 SP2	A8 B8 C8 D8 E8 F8 9EE8 9ED8	ii dd hh ll ee ff ff ff ff ee ff	2 3 4 4 3 2 4 5
INC <i>opr</i> INCA INCX INC <i>opr,X</i> INC <i>,X</i> INC <i>opr,SP</i>	Increment	$M \leftarrow (M) + 1$ $A \leftarrow (A) + 1$ $X \leftarrow (X) + 1$ $M \leftarrow (M) + 1$ $M \leftarrow (M) + 1$ $M \leftarrow (M) + 1$	↑	-	-	↑	↑	-	DIR INH INH IX1 IX SP1	3C 4C 5C 6C 7C 9E6C	dd ff ff	4 1 1 4 3 5
JMP <i>opr</i> JMP <i>opr</i> JMP <i>opr,X</i> JMP <i>opr,X</i> JMP <i>,X</i>	Jump	$PC \leftarrow \text{Jump Address}$	-	-	-	-	-	-	DIR EXT IX2 IX1 IX	BC CC DC EC FC	dd hh ll ee ff ff	2 3 4 3 2
JSR <i>opr</i> JSR <i>opr</i> JSR <i>opr,X</i> JSR <i>opr,X</i> JSR <i>,X</i>	Jump to Subroutine	$PC \leftarrow (PC) + n$ ($n = 1, 2, \text{ or } 3$) Push (PCL); $SP \leftarrow (SP) - 1$ Push (PCH); $SP \leftarrow (SP) - 1$ $PC \leftarrow \text{Unconditional Address}$	-	-	-	-	-	-	DIR EXT IX2 IX1 IX	BD CD DD ED FD	dd hh ll ee ff ff	4 5 6 5 4
LDA # <i>opr</i> LDA <i>opr</i> LDA <i>opr</i> LDA <i>opr,X</i> LDA <i>opr,X</i> LDA <i>,X</i> LDA <i>opr,SP</i> LDA <i>opr,SP</i>	Load A from M	$A \leftarrow (M)$	0	-	-	↑	↑	-	IMM DIR EXT IX2 IX1 IX SP1 SP2	A6 B6 C6 D6 E6 F6 9EE6 9ED6	ii dd hh ll ee ff ff ff ff ee ff	2 3 4 4 3 2 4 5
LDHX # <i>opr</i> LDHX <i>opr</i>	Load H:X from M	$H:X \leftarrow (M:M + 1)$	0	-	-	↑	↑	-	IMM DIR	45 55	ii jj dd	3 4
LDX # <i>opr</i> LDX <i>opr</i> LDX <i>opr</i> LDX <i>opr,X</i> LDX <i>opr,X</i> LDX <i>,X</i> LDX <i>opr,SP</i> LDX <i>opr,SP</i>	Load X from M	$X \leftarrow (M)$	0	-	-	↑	↑	-	IMM DIR EXT IX2 IX1 IX SP1 SP2	AE BE CE DE EE FE 9EEE 9EDE	ii dd hh ll ee ff ff ff ff ee ff	2 3 4 4 3 2 4 5

Table 5-1. Instruction Set Summary (Sheet 5 of 7)

Source Form	Operation	Description	Effect on CCR						Address Mode	Opcode	Operand	Cycles
			V	H	I	N	Z	C				
LSL <i>opr</i> LSLA LSLX LSL <i>opr</i> ,X LSL ,X LSL <i>opr</i> ,SP	Logical Shift Left (Same as ASL)		↑	—	—	—	↑	↑	DIR INH IX1 IX SP1	38 48 58 68 78 9E68	dd ff ff	4 1 1 4 3 5
LSR <i>opr</i> LSRA LSRX LSR <i>opr</i> ,X LSR ,X LSR <i>opr</i> ,SP	Logical Shift Right		↑	—	—	0	↑	↑	DIR INH IX1 IX SP1	34 44 54 64 74 9E64	dd ff ff	4 1 1 4 3 5
MOV <i>opr</i> , <i>opr</i> MOV <i>opr</i> ,X+ MOV # <i>opr</i> , <i>opr</i> MOV X+, <i>opr</i>	Move	(M) _{Destination} ← (M) _{Source} H:X ← (H:X) + 1 (IX+D, DIX+)	0	—	—	—	↑	↑	DD DIX+ IMD IX+D	4E 5E 6E 7E	dd dd dd ii dd dd dd dd	5 4 4 4
MUL	Unsigned multiply	X:A ← (X) × (A)	—	0	—	—	—	0	INH	42		5
NEG <i>opr</i> NEGA NEGX NEG <i>opr</i> ,X NEG ,X NEG <i>opr</i> ,SP	Negate (Two's Complement)	M ← -(M) = \$00 - (M) A ← -(A) = \$00 - (A) X ← -(X) = \$00 - (X) M ← -(M) = \$00 - (M) M ← -(M) = \$00 - (M)	↑	—	—	—	↑	↑	DIR INH INH IX1 IX SP1	30 40 50 60 70 9E60	dd ff ff ff ff	4 1 1 4 3 5
NOP	No Operation	None	—	—	—	—	—	—	INH	9D		1
NSA	Nibble Swap A	A ← (A[3:0]:A[7:4])	—	—	—	—	—	—	INH	62		3
ORA # <i>opr</i> ORA <i>opr</i> ORA <i>opr</i> ORA <i>opr</i> ,X ORA <i>opr</i> ,X ORA ,X ORA <i>opr</i> ,SP ORA <i>opr</i> ,SP	Inclusive OR A and M	A ← (A) (M)	0	—	—	—	↑	↑	IMM DIR EXT IX2 IX1 IX SP1 SP2	AA BA CA DA EA FA 9EEA 9EDA	ii dd hh ll ee ff ff ff ff ee ff	2 3 4 4 3 2 4 5
PSHA	Push A onto Stack	Push (A); SP ← (SP) - 1	—	—	—	—	—	—	INH	87		2
PSHH	Push H onto Stack	Push (H); SP ← (SP) - 1	—	—	—	—	—	—	INH	8B		2
PSHX	Push X onto Stack	Push (X); SP ← (SP) - 1	—	—	—	—	—	—	INH	89		2
PULA	Pull A from Stack	SP ← (SP + 1); Pull (A)	—	—	—	—	—	—	INH	86		2
PULH	Pull H from Stack	SP ← (SP + 1); Pull (H)	—	—	—	—	—	—	INH	8A		2
PULX	Pull X from Stack	SP ← (SP + 1); Pull (X)	—	—	—	—	—	—	INH	88		2
ROL <i>opr</i> ROLA ROLX ROL <i>opr</i> ,X ROL ,X ROL <i>opr</i> ,SP	Rotate Left through Carry		↑	—	—	—	↑	↑	DIR INH INH IX1 IX SP1	39 49 59 69 79 9E69	dd ff ff ff	4 1 1 4 3 5
ROR <i>opr</i> RORA RORX ROR <i>opr</i> ,X ROR ,X ROR <i>opr</i> ,SP	Rotate Right through Carry		↑	—	—	—	↑	↑	DIR INH INH IX1 IX SP1	36 46 56 66 76 9E66	dd ff ff ff	4 1 1 4 3 5

Table 5-1. Instruction Set Summary (Sheet 6 of 7)

Source Form	Operation	Description	Effect on CCR						Address Mode	Opcode	Operand	Cycles
			V	H	I	N	Z	C				
RSP	Reset Stack Pointer	$SP \leftarrow \$FF$	–	–	–	–	–	–	INH	9C		1
RTI	Return from Interrupt	$SP \leftarrow (SP) + 1$; Pull (CCR) $SP \leftarrow (SP) + 1$; Pull (A) $SP \leftarrow (SP) + 1$; Pull (X) $SP \leftarrow (SP) + 1$; Pull (PCH) $SP \leftarrow (SP) + 1$; Pull (PCL)	↑	↑	↑	↑	↑	↑	INH	80		7
RTS	Return from Subroutine	$SP \leftarrow SP + 1$; Pull (PCH) $SP \leftarrow SP + 1$; Pull (PCL)	–	–	–	–	–	–	INH	81		4
SBC #opr SBC opr SBC opr SBC opr,X SBC opr,X SBC ,X SBC opr,SP SBC opr,SP	Subtract with Carry	$A \leftarrow (A) - (M) - (C)$	↑	–	–	↑	↑	↑	IMM DIR EXT IX2 IX1 IX SP1 SP2	A2 B2 C2 D2 E2 F2 9EE2 9ED2	ii dd hh ll ee ff ee ff ff ff ee ff	2 3 4 4 3 2 4 5
SEC	Set Carry Bit	$C \leftarrow 1$	–	–	–	–	–	1	INH	99		1
SEI	Set Interrupt Mask	$I \leftarrow 1$	–	–	1	–	–	–	INH	9B		2
STA opr STA opr STA opr,X STA opr,X STA ,X STA opr,SP STA opr,SP	Store A in M	$M \leftarrow (A)$	0	–	–	↑	↑	–	DIR EXT IX2 IX1 IX SP1 SP2	B7 C7 D7 E7 F7 9EE7 9ED7	dd hh ll ee ff ee ff ff ff ee ff	3 4 4 3 2 4 5
STHX opr	Store H:X in M	$(M:M + 1) \leftarrow (H:X)$	0	–	–	↑	↑	–	DIR	35	dd	4
STOP	Enable \overline{IRQ} Pin; Stop Oscillator	$I \leftarrow 0$; Stop Oscillator	–	–	0	–	–	–	INH	8E		1
STX opr STX opr STX opr,X STX opr,X STX ,X STX opr,SP STX opr,SP	Store X in M	$M \leftarrow (X)$	0	–	–	↑	↑	–	DIR EXT IX2 IX1 IX SP1 SP2	BF CF DF EF FF 9EEF 9EDF	dd hh ll ee ff ee ff ff ff ee ff	3 4 4 3 2 4 5
SUB #opr SUB opr SUB opr SUB opr,X SUB opr,X SUB ,X SUB opr,SP SUB opr,SP	Subtract	$A \leftarrow (A) - (M)$	↑	–	–	↑	↑	↑	IMM DIR EXT IX2 IX1 IX SP1 SP2	A0 B0 C0 D0 E0 F0 9EE0 9ED0	ii dd hh ll ee ff ee ff ff ee ff	2 3 4 4 3 2 4 5
SWI	Software Interrupt	$PC \leftarrow (PC) + 1$; Push (PCL) $SP \leftarrow (SP) - 1$; Push (PCH) $SP \leftarrow (SP) - 1$; Push (X) $SP \leftarrow (SP) - 1$; Push (A) $SP \leftarrow (SP) - 1$; Push (CCR) $SP \leftarrow (SP) - 1$; $I \leftarrow 1$ PCH \leftarrow Interrupt Vector High Byte PCL \leftarrow Interrupt Vector Low Byte	–	–	1	–	–	–	INH	83		9
TAP	Transfer A to CCR	$CCR \leftarrow (A)$	↑	↑	↑	↑	↑	↑	INH	84		2
TAX	Transfer A to X	$X \leftarrow (A)$	–	–	–	–	–	–	INH	97		1

Table 5-1. Instruction Set Summary (Sheet 7 of 7)

Source Form	Operation	Description	Effect on CCR						Address Mode	Opcode	Operand	Cycles
			V	H	I	N	Z	C				
TPA	Transfer CCR to A	$A \leftarrow (\text{CCR})$	—	—	—	—	—	—	INH	85		1
TST <i>opr</i> TSTA TSTX TST <i>opr</i> ,X TST ,X TST <i>opr</i> ,SP	Test for Negative or Zero	$(A) - \$00$ or $(X) - \$00$ or $(M) - \$00$	0	—	—	↑	↑	—	DIR INH INH IX1 IX SP1	3D 4D 5D 6D 7D 9E6D	dd ff ff	3 1 1 3 2 4
TSX	Transfer SP to H:X	$H:X \leftarrow (\text{SP}) + 1$	—	—	—	—	—	—	INH	95		2
TXA	Transfer X to A	$A \leftarrow (X)$	—	—	—	—	—	—	INH	9F		1
TXS	Transfer H:X to SP	$(\text{SP}) \leftarrow (H:X) - 1$	—	—	—	—	—	—	INH	94		2

A	Accumulator	<i>n</i>	Any bit
C	Carry/borrow bit	<i>opr</i>	Operand (one or two bytes)
CCR	Condition code register	PC	Program counter
dd	Direct address of operand	PCH	Program counter high byte
dd rr	Direct address of operand and relative offset of branch instruction	PCL	Program counter low byte
DD	Direct to direct addressing mode	REL	Relative addressing mode
DIR	Direct addressing mode	<i>rel</i>	Relative program counter offset byte
DIX+	Direct to indexed with post increment addressing mode	rr	Relative program counter offset byte
ee ff	High and low bytes of offset in indexed, 16-bit offset addressing	SP1	Stack pointer, 8-bit offset addressing mode
EXT	Extended addressing mode	SP2	Stack pointer 16-bit offset addressing mode
ff	Offset byte in indexed, 8-bit offset addressing	SP	Stack pointer
H	Half-carry bit	U	Undefined
H	Index register high byte	V	Overflow bit
hh ll	High and low bytes of operand address in extended addressing	X	Index register low byte
I	Interrupt mask	Z	Zero bit
ii	Immediate operand byte	&	Logical AND
IMD	Immediate source to direct destination addressing mode		Logical OR
IMM	Immediate addressing mode	⊕	Logical EXCLUSIVE OR
INH	Inherent addressing mode	()	Contents of
IX	Indexed, no offset addressing mode	—()	Negation (two's complement)
IX+	Indexed, no offset, post increment addressing mode	#	Immediate value
IX+D	Indexed with post increment to direct addressing mode	«	Sign extend
IX1	Indexed, 8-bit offset addressing mode	←	Loaded with
IX1+	Indexed, 8-bit offset, post increment addressing mode	?	If
IX2	Indexed, 16-bit offset addressing mode	:	Concatenated with
M	Memory location	↑	Set or cleared
N	Negative bit	—	Not affected

5.9 Opcode Map

The opcode map is provided in [Table 5-2](#).

Table 5-2. Opcode Map

		Bit Manipulation		Branch	Read-Modify-Write					Control		Register/Memory																										
		DIR	DIR	REL	DIR	INH	INH	IX1	SP1	IX	INH	INH	IMM	DIR	EXT	IX2	SP2	IX1	SP1	IX																		
MSB LSB		0	1	2	3	4	5	6	9E6	7	8	9	A	B	C	D	9ED	E	9EE	F																		
0	5 3	BRSET0 DIR	4 2	BSET0 DIR	3 2	BRA REL	4 2	NEG DIR	1 1	NEGA INH	1 1	NEGX INH	4 2	NEG IX1	3 3	NEG SP1	5 4	NEG IX1	3 3	NEG SP1	2 1	SUB IX																
1	5 3	BRCLR0 DIR	4 2	BCLR0 DIR	3 2	BRN REL	5 3	CBEQ DIR	4 3	CBEQA IMM	4 3	CBEQX IMM	5 3	CBEQ IX1+	4 4	CBEQ SP1	2 2	CBEQ IX+	1 1	RTS INH	4 2	BLT REL																
2	5 3	BRSET1 DIR	4 2	BSET1 DIR	3 2	BHI REL	3 2	BRA REL	4 1	MUL INH	7 1	DIV INH	3 1	NSA INH	2 2	DAA INH	3 2	BGT REL	4 2	SBC IMM	3 2	SBC DIR	4 3	SBC EXT	4 3	SBC IX2	5 4	SBC SP2	3 2	SBC IX1	4 3	SBC SP1	2 1	SBC IX				
3	5 3	BRCLR1 DIR	4 2	BCLR1 DIR	3 2	BLS REL	4 2	COM DIR	1 1	COMA INH	1 1	COMX INH	2 2	COM IX1	3 3	COM SP1	1 1	COM IX	1 1	SWI INH	2 2	BLE REL	2 2	CPX IMM	3 2	CPX DIR	4 3	CPX EXT	3 3	CPX IX2	4 4	CPX SP2	2 2	CPX IX1	3 3	CPX SP1	1 1	CPX IX
4	5 3	BRSET2 DIR	4 2	BSET2 DIR	3 2	BCC REL	4 2	LSR DIR	1 1	LSRA INH	1 1	LSRX INH	2 2	LSR IX1	3 3	LSR SP1	1 1	LSR IX	1 1	TAP INH	1 1	TXS INH	2 2	AND IMM	2 2	AND DIR	3 3	AND EXT	3 3	AND IX2	4 4	AND SP2	2 2	AND IX1	3 3	AND SP1	1 1	AND IX
5	5 3	BRCLR2 DIR	4 2	BCLR2 DIR	3 2	BCS REL	4 2	STHX DIR	1 3	LDHX IMM	4 2	LDHX DIR	3 3	CPHX IMM	4 2	CPHX DIR	1 1	TPA INH	2 1	TSX INH	2 2	BIT IMM	3 2	BIT DIR	4 3	BIT EXT	3 3	BIT IX2	4 4	BIT SP2	2 2	BIT IX1	3 3	BIT SP1	1 1	BIT IX		
6	5 3	BRSET3 DIR	4 2	BSET3 DIR	3 2	BNE REL	4 2	ROR DIR	1 1	RORA INH	1 1	RORX INH	2 2	ROR IX1	5 3	ROR SP1	1 1	ROR IX	2 1	PULA INH	2 2	LDA IMM	3 2	LDA DIR	4 3	LDA EXT	3 3	LDA IX2	4 4	LDA SP2	2 2	LDA IX1	3 3	LDA SP1	1 1	LDA IX		
7	5 3	BRCLR3 DIR	4 2	BCLR3 DIR	3 2	BEQ REL	4 2	ASR DIR	1 1	ASRA INH	1 1	ASRX INH	2 2	ASR IX1	5 3	ASR SP1	1 1	ASR IX	2 1	PSHA INH	1 1	TAX INH	2 2	AIS IMM	3 2	STA DIR	4 3	STA EXT	3 3	STA IX2	4 4	STA SP2	2 2	STA IX1	3 3	STA SP1	1 1	STA IX
8	5 3	BRSET4 DIR	4 2	BSET4 DIR	3 2	BHCC REL	4 2	LSL DIR	1 1	LSLA INH	1 1	LSLX INH	2 2	LSL IX1	5 3	LSL SP1	1 1	LSL IX	2 1	PULX INH	1 1	CLC INH	2 2	EOR IMM	3 2	EOR DIR	4 3	EOR EXT	3 3	EOR IX2	4 4	EOR SP2	2 2	EOR IX1	3 3	EOR SP1	1 1	EOR IX
9	5 3	BRCLR4 DIR	4 2	BCLR4 DIR	3 2	BHCS REL	4 2	ROL DIR	1 1	ROLA INH	1 1	ROLX INH	2 2	ROL IX1	5 3	ROL SP1	1 1	ROL IX	2 1	PSHX INH	1 1	SEC INH	2 2	ADC IMM	3 2	ADC DIR	4 3	ADC EXT	3 3	ADC IX2	4 4	ADC SP2	2 2	ADC IX1	3 3	ADC SP1	1 1	ADC IX
A	5 3	BRSET5 DIR	4 2	BSET5 DIR	3 2	BPL REL	4 2	DEC DIR	1 1	DECA INH	1 1	DECX INH	2 2	DEC IX1	5 3	DEC SP1	1 1	DEC IX	2 1	PULH INH	1 1	CLI INH	2 2	ORA IMM	3 2	ORA DIR	4 3	ORA EXT	3 3	ORA IX2	4 4	ORA SP2	2 2	ORA IX1	3 3	ORA SP1	1 1	ORA IX
B	5 3	BRCLR5 DIR	4 2	BCLR5 DIR	3 2	BMI REL	5 3	DBNZ DIR	3 2	DBNZA INH	3 2	DBNZX INH	4 3	DBNZ IX1	6 4	DBNZ SP1	2 2	DBNZ IX	2 1	PSHH INH	1 1	SEI INH	2 2	ADD IMM	3 2	ADD DIR	4 3	ADD EXT	3 3	ADD IX2	4 4	ADD SP2	2 2	ADD IX1	3 3	ADD SP1	1 1	ADD IX
C	5 3	BRSET6 DIR	4 2	BSET6 DIR	3 2	BMC REL	4 2	INC DIR	1 1	INCA INH	1 1	INCX INH	2 2	INC IX1	5 3	INC SP1	1 1	INC IX	2 1	CLRH INH	1 1	RSP INH	2 2	JMP IMM	3 2	JMP DIR	4 3	JMP EXT	3 3	JMP IX2	4 4	JMP SP2	2 2	JMP IX1	3 3	JMP SP1	1 1	JMP IX
D	5 3	BRCLR6 DIR	4 2	BCLR6 DIR	3 2	BMS REL	4 2	TST DIR	1 1	TSTA INH	1 1	TSTX INH	2 2	TST IX1	3 3	TST SP1	1 1	TST IX	2 1	NOP INH	1 1	BSR REL	4 2	JSR DIR	5 3	JSR EXT	4 3	JSR IX2	5 4	JSR SP2	2 2	JSR IX1	3 3	JSR SP1	1 1	JSR IX		
E	5 3	BRSET7 DIR	4 2	BSET7 DIR	3 2	BIL REL	5 3	MOV DD	4 2	MOV DIX+	3 3	MOV IMD	4 2	MOV IX+D	1 1	STOP INH	1 1	TXA INH	2 2	AIX IMM	3 2	STX DIR	4 3	STX EXT	3 3	STX IX2	4 4	STX SP2	2 2	STX IX1	3 3	STX SP1	1 1	STX IX				
F	5 3	BRCLR7 DIR	4 2	BCLR7 DIR	3 2	BIH REL	4 2	CLR DIR	1 1	CLRA INH	1 1	CLR INH	2 2	CLR IX1	3 3	CLR SP1	1 1	CLR IX	2 1	WAIT INH	1 1	TXA INH	2 2	AIX IMM	3 2	STX DIR	4 3	STX EXT	3 3	STX IX2	4 4	STX SP2	2 2	STX IX1	3 3	STX SP1	1 1	STX IX

INH Inherent
 IMM Immediate
 DIR Direct
 EXT Extended
 DD Direct-Direct
 IX+D Indexed-Direct
 REL Relative
 IX Indexed, No Offset
 IX1 Indexed, 8-Bit Offset
 IX2 Indexed, 16-Bit Offset
 IMD Immediate-Direct
 DIX+ Direct-Indexed
 SP1 Stack Pointer, 8-Bit Offset
 SP2 Stack Pointer, 16-Bit Offset
 IX+ Indexed, No Offset with Post Increment
 IX1+ Indexed, 1-Byte Offset with Post Increment

Low Byte of Opcode in Hexadecimal

MSB	0	High Byte of Opcode in Hexadecimal
LSB	5 3	Cycles Opcode Mnemonic Number of Bytes / Addressing Mode
0	BRSET0 DIR	

Section 6. Resets and Interrupts

6.1 Contents

6.2	Introduction	62
6.3	Resets.	62
6.3.1	Reset Entry.	63
6.3.1.1	External Reset	63
6.3.1.2	COP Reset.	63
6.3.1.3	Illegal Opcode Reset	63
6.3.1.4	Illegal Address Reset.	64
6.3.1.5	Low-Power Reset.	64
6.3.2	Reset Recovery	64
6.3.2.1	External Reset Recovery	65
6.3.2.2	Active Reset Recovery.	65
6.3.2.3	Power-On Reset (POR) Recovery	65
6.3.3	Reset Status Register	67
6.3.4	Reset States.	68
6.4	Interrupts.	70
6.4.1	Effects	70
6.4.2	Sources	73
6.4.2.1	SWI Instruction.	73
6.4.2.2	Break Interrupt	73
6.4.2.3	IRQ1 Pin.	73
6.4.2.4	CMT Interrupt.	73
6.4.2.5	TIM0I Interrupt	74
6.4.2.6	KBD0–KBD7 Pins	74
6.4.3	Interrupt Status Registers.	74
6.4.3.1	Interrupt Status Register 1	75
6.4.3.2	Interrupt Status Register 2	76

6.2 Introduction

Resets and interrupts are responses to exceptional events during program execution. A reset re-initializes the MCU to its startup condition. An interrupt vectors the program counter to a service routine.

6.3 Resets

A reset immediately returns the MCU to a known startup condition and begins program execution from a user-defined memory location.

Figure 6-1 shows the structure of the reset circuits.

NOTE: The reset circuits are powered by the chip V_{DD} . External circuits should drive the \overline{RST} pin through a resistor between V_{DD} and V_{SS} levels. If external circuits use a pullup device on \overline{RST} , the pin must be pulled to V_{DD} and **not** to BATT.

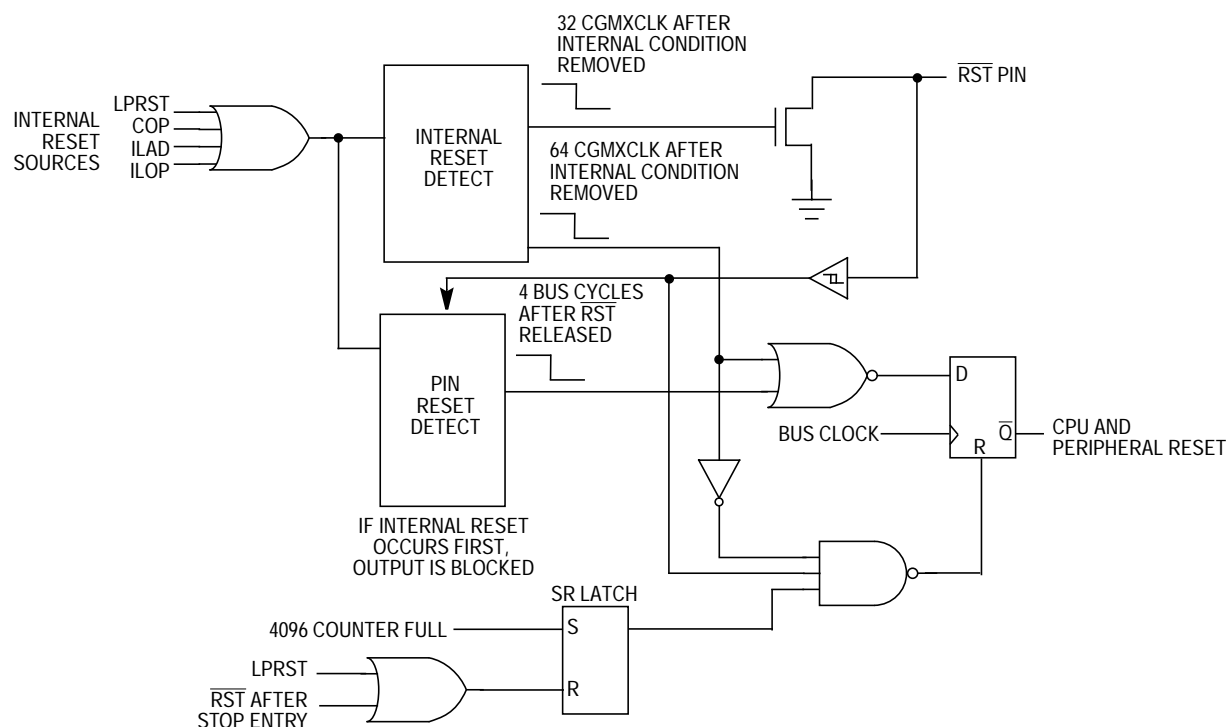


Figure 6-1. Reset Block Diagram

6.3.1 Reset Entry

Reset entry can be caused by an internal or external event. External events control reset by driving the $\overline{\text{RST}}$ pin.

Internal resets, which pull the $\overline{\text{RST}}$ pin low, have several sources:

- Computer operating properly (COP)
- Illegal opcode
- Illegal address
- Low-power reset

Reset entry immediately stops the operation of the instruction being executed.

6.3.1.1 External Reset

A logic 0 applied to the $\overline{\text{RST}}$ pin for a time, t_{IRL} , generates an external reset. After reset recovery, the PIN bit in the reset status register will be set.

6.3.1.2 COP Reset

A COP reset is an internal reset caused by an overflow of the COP counter. After reset recovery, the COP bit in the reset status register will be set.

To clear the COP counter and prevent a COP reset, write any value to the COP control register at location \$FFFF.

6.3.1.3 Illegal Opcode Reset

An illegal opcode reset is an internal reset caused by an opcode that is not in the instruction set. After reset recovery, the ILOP bit in the reset status register will be set.

If the stop enable bit, STOP, in the configuration register is a logic 0, the STOP instruction causes an illegal opcode reset.

6.3.1.4 Illegal Address Reset

An illegal address reset is an internal reset caused by opcode fetch from an unmapped address. After reset recovery, the ILAD bit in the reset status register will be set.

A data fetch from an unmapped address does not generate a reset.

6.3.1.5 Low-Power Reset

The MC68HC08RC16 is designed for remote control applications and has on-chip circuits that force the MCU into low-power reset mode to preserve RAM contents. The low-power reset mode is entered whenever batteries have been removed or when the V_{DD} voltage is detected below the V_{LVR} voltage (a low battery condition exists). The V_{LVR} threshold is defined in [19.10 LVI Characteristics](#).

A low-power reset:

- Puts the MCU into its low-power reset mode where the clocks to the CPU and modules are disabled
- Requires the BATT pin to be pulled low and battery reinsertion to exit this mode
- Upon exit, the system will go through the power-on reset recovery sequence.
- After reset recovery, the POR and LP bits in the reset status register will be set.

6.3.2 Reset Recovery

Reset recovery:

- Initializes certain control and status bits
- Loads the program counter with a user-defined reset vector address from locations \$FFFE and \$FFFF
- Selects CGMXCLK divided by four as the bus clock

6.3.2.1 External Reset Recovery

Figure 6-2 shows the relative timing of an external reset recovery.

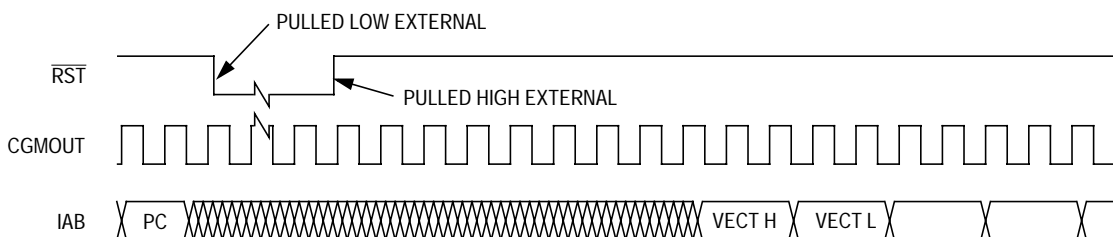


Figure 6-2. External Reset Recovery Timing

6.3.2.2 Active Reset Recovery

An active reset recovery occurs immediately after internal resets from a COP, illegal address, or illegal opcode have occurred. These reset sources pull the $\overline{\text{RST}}$ pin low for 32 CGMXCLK cycles to allow resetting of external devices. The MCU is held in reset for an additional 32 CGMXCLK cycles after releasing the $\overline{\text{RST}}$ pin. **Figure 6-3** shows the relative timing of an active reset recovery.

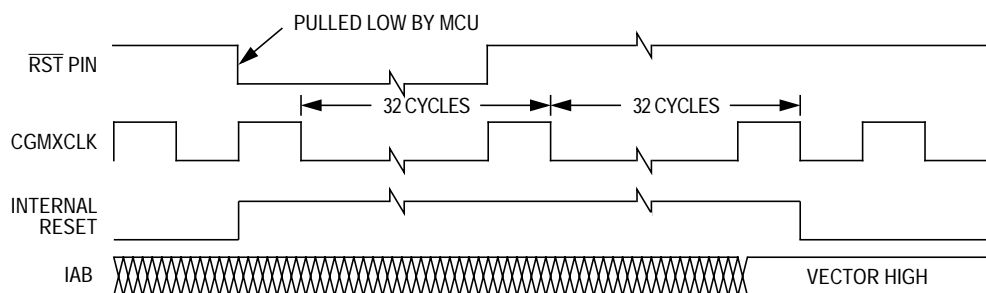


Figure 6-3. Active Reset Recovery Timing


6.3.2.3 Power-On Reset (POR) Recovery

A power-on reset (POR) is an internal reset caused by a positive transition on the BATT pin. This will occur when the entire system is initially powered up or when the system is experiencing a battery change.

A power-on reset:

- After the batteries have been inserted, holds the clocks to the CPU and modules inactive for 262,144 CGMXCLK cycles for the external capacitor charge time
- Keeps the clocks inactive for an additional 512 CGMXCLK cycles for LVI enable time: the LVI will force re-entry into low-power reset mode if V_{DD} is below the $V_{LVR} + H_{LVR}$ voltage
- Keeps the clocks inactive for a system stabilization delay of 4096 CGMXCLK cycles
- Drives the \overline{RST} pin low during the startup process and releases the \overline{RST} pin 32 CGMXCLK cycles after the system stabilization delay
- Releases the CPU to begin the reset vector sequence 64 CGMXCLK cycles after the system stabilization delay
- Sets the POR and LP bits in the reset status register and clears all other bits in the register

Figure 6-4 shows the relative timing of a power-on reset recovery.

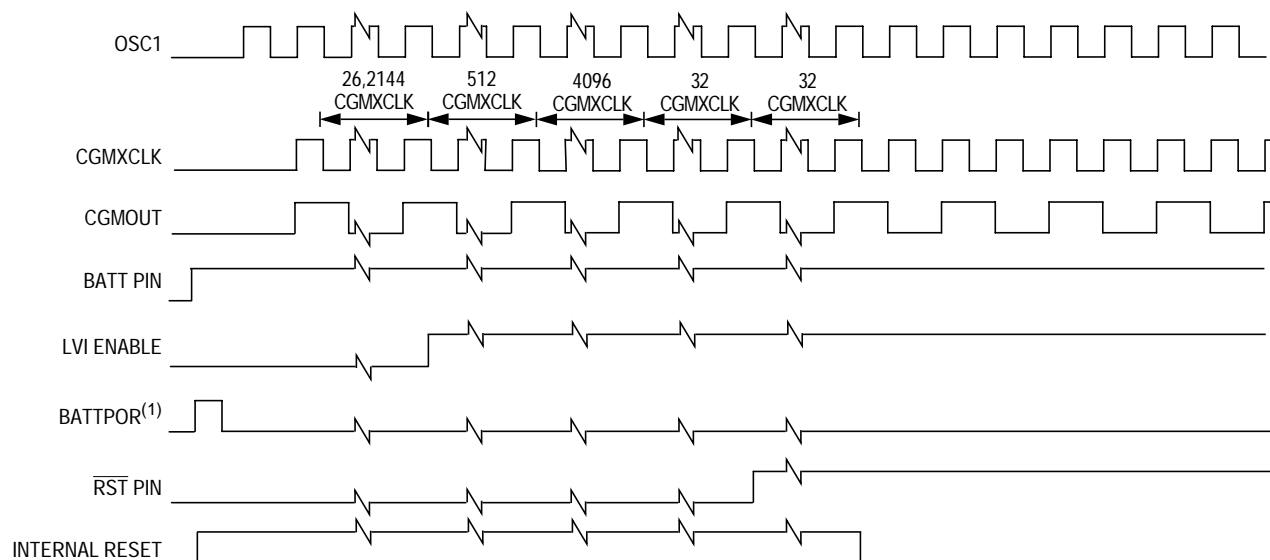

Note 1: POR is an internally generated power-on reset pulse.

Figure 6-4. Power-on Reset (POR) Recovery

6.3.3 Reset Status Register

This read-only register contains flags to show reset sources. All flag bits are cleared automatically following a read of the register. Reset service can read the reset status register to clear the register after power-on reset and to determine the source of any subsequent reset.

The register is initialized on power-up as shown with the POR and the LP bits set and all other bits cleared. During a POR or any other internal reset, the $\overline{\text{RST}}$ pin is pulled low. After the pin is released, it will be sampled 32 CGMXCLK cycles later. If the pin is not above a V_{IH} at that time, the PIN bit in the RSR may be set in addition to whatever other bits are set.

NOTE: *Only a read of the reset status register clears all reset flags. After multiple resets from different sources without reading the register, multiple flags remain set.*

Address: \$FE01

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	POR	PIN	COP	ILOP	ILAD	0	LPRST	0
Write:								
POR:	1	X	0	0	0	0	1	0


 = Unimplemented X = Indeterminate

Figure 6-5. Reset Status Register (RSR)

POR — Power-On Reset Flag

1 = Power-on reset since last read of RSR

0 = Read of RSR since last power-on reset

PIN — External Reset Flag

1 = External reset since last read of RSR

0 = Power-on reset or read of RSR since last external reset

COP — Computer Operating Properly Reset Bit

1 = Last reset caused by timeout of COP counter

0 = POR or read of RSR

ILOP — Illegal Opcode Reset Bit

1 = Last reset caused by an illegal opcode

0 = POR or read of RSR

ILAD — Illegal Address Reset Bit

1 = Last reset caused by an opcode fetch from an illegal address

0 = POR or read of RSR

LPRST — Low-Power Mode Reset Bit

1 = Last reset caused by low-power supply voltage

0 = POR or read of RSR

6.3.4 Reset States

A brief description of how the various resets initialize the MCU is given here.

- Central processor unit (CPU):
 - Accumulator (A) — Unaffected
 - Index register (H:X) — Bits 15:8 cleared, bits 7:0 indeterminate
 - Stack pointer (SP) — Loaded with \$FF
 - Program counter (PC) — Loaded with vector from locations \$FFFE and \$FFFF
 - Condition code register (CCR) — I bit is set, other bits indeterminate
- Resets:
 - Reset status register (RSR) — Bit indicating last cause of reset is set, other bits are unaffected by reset
- Interrupts:
 - Interrupt status register (INT1) — Cleared
- Low-voltage inhibit (LVI) reset:
 - LVI status register (LVISR) — Unaffected
- Configuration register (CONFIG):
 - CONFIG — Value fixed at time of manufacture

- Input/output (I/O) ports:
 - Data registers (PTA, PTB, and PTC) — Unaffected
 - Data direction registers (DDRA, DDRB, and DDRC) — Cleared
- Carrier modulator transmitter (CMT):
 - CMT primary carrier data registers (CCH1/CCL1) — IROLN, IROLP, and CMTPOL are cleared, all other bits are unaffected
 - CMT secondary carrier data registers (CCH2/CCL2) — Unaffected
 - CMT modulator control and status register (CMCS) — Cleared
 - CMT modulator data register (CMD1, CMD2, and CMD3) — Unaffected
- Modulo timer (TIM0I):
 - TIM status and control register (TSC) — TSTOP set, other bits cleared
 - TIM counter registers (TCNTH/TCNTL) — Cleared
 - TIM counter modulo registers (TMODH/TMODL) — Set
- External interrupt (IRQ):
 - IRQ status and control register (ISCR) — Cleared
- Keyboard interrupt module (KBI):
 - Keyboard status and control register (KBSCR) — Cleared
 - Keyboard interrupt enable register (KBIER) — Cleared
- Computer operating properly (COP):
 - COP control register (COPCTL) — Unaffected
- Break module (BRK):
 - Break status register (BSR) — Cleared
 - Break flag control register (BFCR) — Cleared
 - Break address registers (BRKH/BRKL) — Cleared
 - Break status and control register (BSCR) — Cleared

6.4 Interrupts

An interrupt temporarily changes the sequence of program execution to respond to a particular event. An interrupt does not stop the operation of the instruction being executed, but begins when the current instruction completes its operation.

6.4.1 Effects

An interrupt:

- Saves the CPU registers on the stack. At the end of the interrupt, the RTI instruction recovers the CPU registers from the stack so that normal processing can resume. See [Figure 6-6](#).
- Sets the interrupt mask (I bit) to prevent additional interrupts. Once an interrupt is latched, no other interrupt can take precedence, regardless of its priority.
- Loads the program counter with a user-defined vector address

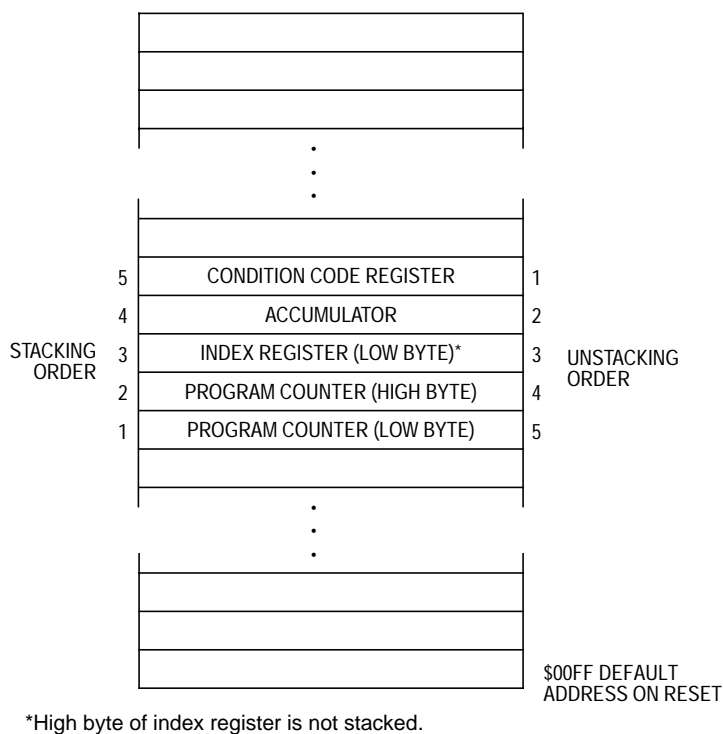


Figure 6-6. Interrupt Stacking Order

After every instruction, the CPU checks all pending interrupts if the I bit is not set. If more than one interrupt is pending when an instruction is done, the highest priority interrupt is serviced first. In the example shown in **Figure 6-7**, if an interrupt is pending upon exit from the interrupt service routine, the pending interrupt is serviced before the load accumulator from memory (LDA) instruction is executed.

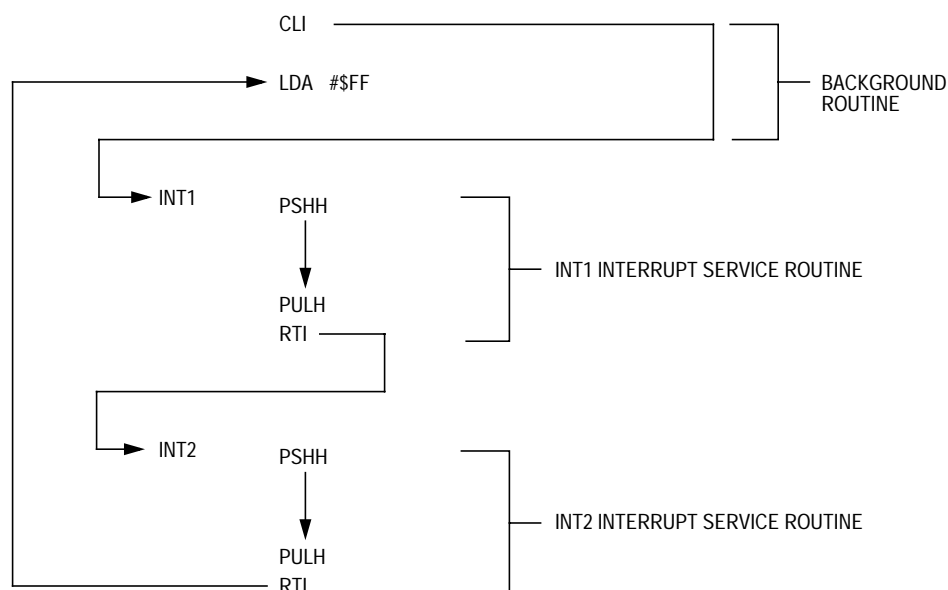


Figure 6-7. Interrupt Recognition Example

The LDA opcode is prefetched by both the interrupt 1 (INT1) and interrupt 2 (INT2) return-from-interrupt (RTI) instructions. However, in the case of the INT1 RTI prefetch, this is a redundant operation.

NOTE: *To maintain compatibility with the M6805 Family, the H register is not pushed on the stack during interrupt entry. If the interrupt service routine modifies the H register or uses the indexed addressing mode, save the H register and then restore it prior to exiting the routine.*

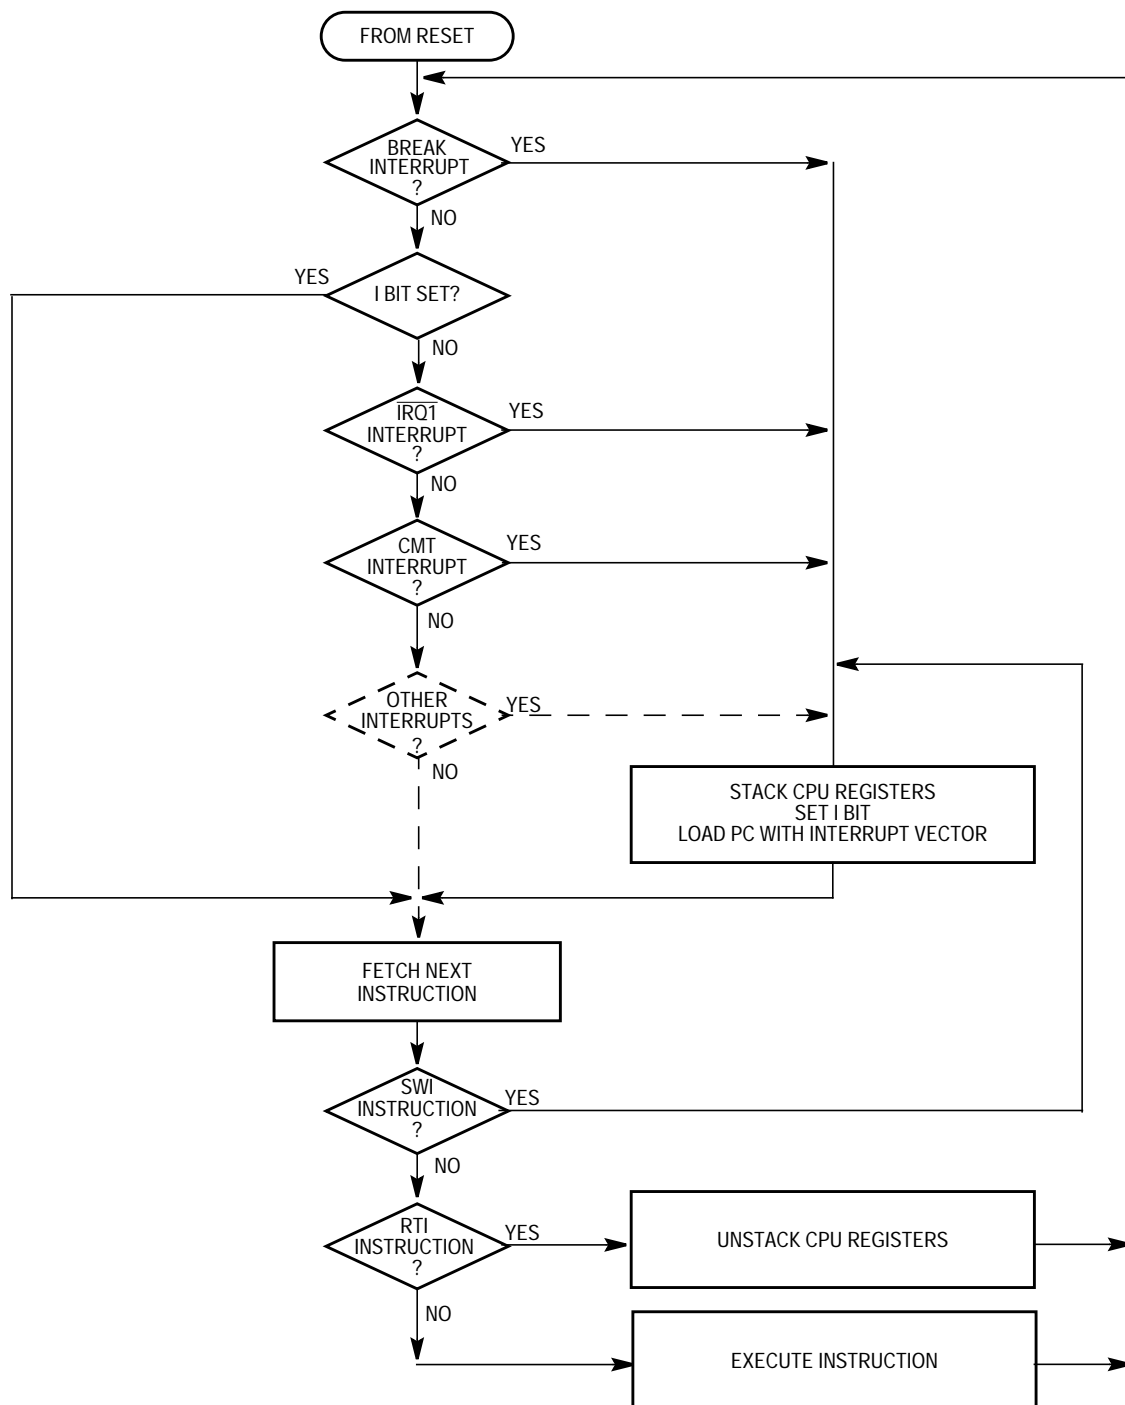


Figure 6-8. Interrupt Processing

6.4.2 Sources

The sources shown in [Table 6-1](#) can generate CPU interrupt requests.

Table 6-1. Interrupt Sources

Source	Flag	Mask ⁽¹⁾	INT Register Flag	Priority ⁽²⁾	Vector Address
SWI instruction	None	None	None	0	\$FFFC–\$FFFD
$\overline{\text{IRQ1}}$ pin	IRQ1F	IMASK1	IF1	1	\$FFFA–\$FFFB
CMT end of cycle	EOCF	EOCIE	IF2	2	\$FFF8–\$FFF9
TIM01 overflow	TOF	TOIE	IF3	3	\$FFF6–\$FFF7
Keyboard pin	KEYF	IMASKK	IF4	4	\$FFF4–\$FFF5

1. The I bit in the condition code register is a global mask for all interrupt sources except the SWI instruction.

2. 0 = highest priority

6.4.2.1 SWI Instruction

The software interrupt instruction (SWI) causes a non-maskable interrupt.

NOTE: A software interrupt pushes PC onto the stack. An SWI does **not** push PC – 1, as a hardware interrupt does.

6.4.2.2 Break Interrupt

The break module causes the CPU to execute an SWI instruction at a software-programmable break point.

6.4.2.3 $\overline{\text{IRQ1}}$ Pin

A logic 0 on the $\overline{\text{IRQ1}}$ pin latches an external interrupt request.

6.4.2.4 CMT Interrupt

The end-of-cycle flag (EOCF) can generate an interrupt request. The EOCF bit is set at the end of each modulation cycle. The EOC interrupt

enable (EOCIE) bit in the CMT control and status register enables CPU interrupt requests.

6.4.2.5 TIM0I Interrupt

The TIM0I overflow flag (TOF) can generate an interrupt request. The TOF bit is set when the TIM0I counter value rolls over to \$0000 after matching the value in the TIM0I counter modulo registers. The TIM0I overflow interrupt enable bit, TOIE, enables CPU interrupt requests. TOF and TOIE are in the TIM0I status and control register.

6.4.2.6 $\overline{KBD0}$ – $\overline{KBD7}$ Pins

A logic 0 on a keyboard interrupt pin latches an external interrupt request.

6.4.3 Interrupt Status Registers

The flags in the interrupt status registers identify maskable interrupt sources. [Table 6-2](#) summarizes the interrupt sources and the interrupt status register flags that they set. The interrupt status registers can be useful for debugging.

Table 6-2. Interrupt Source Flags

Interrupt Source	Interrupt Status Register Flag
Reset	—
SWI instruction	—
$\overline{IRQ1}$ pin	IF1
CMT	IF2
TIM0I	IF3
Keyboard pin	IF4

6.4.3.1 Interrupt Status Register 1

Address: \$FE04

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	IF6	IF5	IF4	IF3	IF2	IF1	0	0
Write:	R	R	R	R	R	R	R	R
Reset:	0	0	0	0	0	0	0	0

R

 = Reserved

Figure 6-9. Interrupt Status Register 1 (INT1)

IF6–IF5 — Interrupt Flags 6–5

Since the MC68HC08RC16 does not use these interrupt flags, these bits will always read 0.

IF4–IF1 — Interrupt Flags 4–1

These flags indicate the presence of interrupt requests from the sources shown in [Table 6-2](#).

- 1 = Interrupt request present
- 0 = No interrupt request present

Bit 0 and Bit 1 — Always read 0

6.4.3.2 Interrupt Status Register 2

Address: \$FE05

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	IF14	IF13	IF12	IF11	IF10	IF9	IF8	IF7
Write:	R	R	R	R	R	R	R	R
Reset:	0	0	0	0	0	0	0	0

R = Reserved

Figure 6-10. Interrupt Status Register 2 (INT2)

IF14–IF7 — Interrupt Flags 14–7

Since the MC68HC08RC16 does not use these interrupt flags, these bits will always read 0.

Section 7. Low-Power Modes

7.1 Contents

7.2	Introduction	78
7.3	Wait Mode	78
7.4	Stop Mode	78
7.5	Low-Power Reset Mode	78
7.5.1	External Circuits	79
7.5.2	Low-Power Reset Operation	80
7.5.3	RAM Retention Determination	81
7.6	Central Processor Unit (CPU).	82
7.6.1	Wait Mode	82
7.6.2	Stop Mode	82
7.7	Break Module (BRK).	83
7.7.1	Wait Mode	83
7.7.2	Stop Mode	83
7.8	Computer Operating Properly Module (COP).	83
7.8.1	Wait Mode	83
7.8.2	Stop Mode	83
7.9	External Interrupt Module (IRQ)	84
7.9.1	Wait Mode	84
7.9.2	Stop Mode	84
7.10	Keyboard Interrupt Module (KBI)	84
7.10.1	Wait Mode	84
7.10.2	Stop Mode	84
7.11	Low-Voltage Inhibit Module (LVI)	85
7.11.1	Wait Mode	85
7.11.2	Stop Mode	85

7.12	Carrier Modulator Transmitter (CMT)	85
7.12.1	Wait Mode	85
7.12.2	Stop Mode	85
7.13	Timer Interface Module (TIM0I)	86
7.13.1	Wait Mode	86
7.13.2	Stop Mode	86
7.14	Exiting Wait Mode	86
7.15	Exiting Stop Mode	87

7.2 Introduction

The MCU may enter three low-power modes. Two of the modes, wait mode and stop mode, are common to all HC08 MCUs and are entered through instruction execution. A third low-power mode, the low-power reset mode (LPRST), is entered when a low voltage condition exists.

7.3 Wait Mode

The WAIT instruction puts the MCU in a low-power standby mode in which the CPU clock is disabled but the bus clock continues to run.

7.4 Stop Mode

Stop mode is entered when a STOP instruction is executed. Both the CPU clock and the bus clock are disabled in stop mode.

7.5 Low-Power Reset Mode

The MC68HC08RC16 is designed for remote control applications and has on-chip circuits that force the MCU into low-power reset mode to preserve RAM contents. The low-power reset mode is entered whenever batteries have been removed or when the V_{DD} voltage is detected below the V_{LVR} voltage (a low battery condition exists). The V_{LVR} threshold is defined in [19.10 LVI Characteristics](#).

A low-power reset:

- Puts the MCU into its low-power reset mode where the clocks to the CPU and modules are disabled
- Requires the BATT pin to be pulled low and battery reinsertion to exit this mode
- Upon exit, the system will go through the power-on reset recovery sequence.
- After reset recovery, the POR and LP bits in the reset status register will be set.

7.5.1 External Circuits

The required external components for low-power mode operation are shown in [Figure 7-1](#). Refer to [19.11 Battery Detection Characteristics](#) for full component specifications. Power supply for the MCU is provided through the BATT pin.

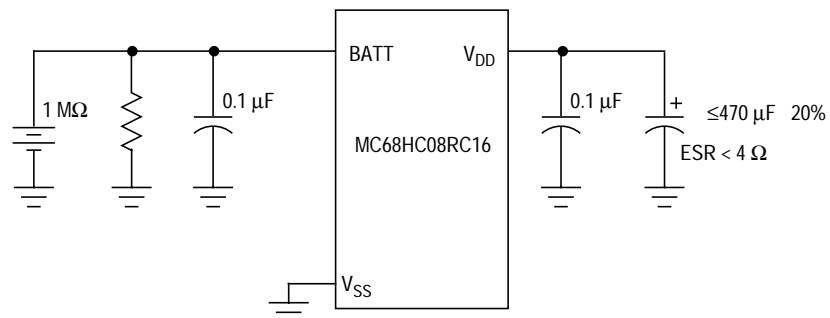


Figure 7-1. External Low-Power Circuit

NOTE: Other pin connections necessary for proper MCU operation (for example, $\overline{IRQ1}$ and \overline{RST}) are not shown. The reset and external interrupt circuits are powered by the chip V_{DD} . External circuits should drive these pins between V_{DD} and V_{SS} levels. If external circuits use a pullup device on \overline{RST} or $\overline{IRQ1}$, the pins must be pulled to V_{DD} and **not** to BATT.

7.5.2 Low-Power Reset Operation

A block diagram of the low-power reset circuit is shown in [Figure 7-2](#). The LPRST signal controls entry and exit from the low power reset mode. Low-power reset mode is entered whenever the batteries are removed or when V_{DD} is detected below V_{LVR} and is exited upon battery insertion.

The V_{DD} isolator is a MOSFET transistor connected to the BATT pin. This circuit blocks discharging of the external bulk capacitor when batteries have been removed.

When the batteries are removed, the external 1-M Ω pulldown resistor will force the BATT pin low. The external bulk capacitor continues to source the chip V_{DD} . The removed battery is detected and asserts LPRST. The low-power reset condition cannot be cleared until batteries have been reinstalled.

When new batteries are inserted, a 262,144 CGMXCLK cycle delay is started. This delay is used for charging the external bulk capacitor through the V_{DD} isolator. This delay (32 ms with an 8-MHz external crystal) provides enough time for the V_{DD} supply to get above V_{LVR} .

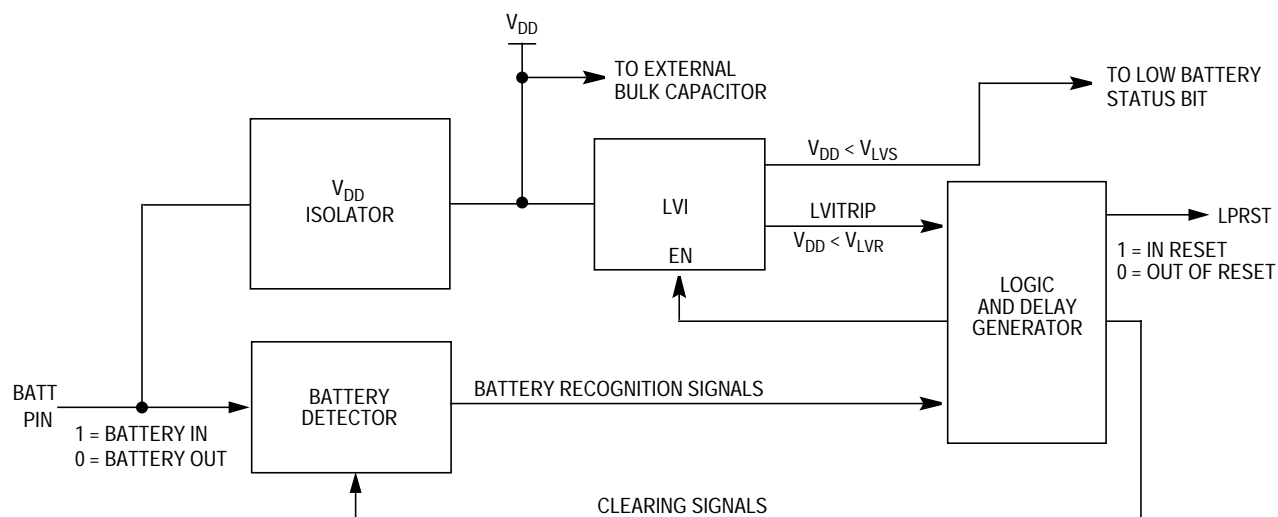


Figure 7-2. Internal Low-Battery Detection Block Diagram

After the 262,144 CGMXCLK cycle delay, a 512 CGMXCLK cycle delay occurs while the LVI is enabled and samples V_{DD} . The LVI is enabled at this time to sample V_{DD} to check if weak batteries were reinstalled. If V_{DD} is detected below V_{LVR} , the LVI will cause the MCU to re-enter the low-power reset mode before the CPU begins operation. The low-power reset mode cannot be exited until batteries have been removed and reinserted.

The low-power reset condition is cleared after the 512 CGMXCLK cycle delay and a system stabilization delay of 4096 CGMXCLK cycles occurs. The complete power-on reset recovery sequence is detailed in [6.3.2.3 Power-On Reset \(POR\) Recovery](#).

7.5.3 RAM Retention Determination

The external bulk capacitor is the power storage device used for RAM retention when the battery supply has been removed. The decay rate of the capacitor and the V_{DD} level at the time low-power reset mode is entered will determine actual retention time. The low-power mode is entered when the LVI forces entry into low-power reset mode or when batteries have been removed.

The LVI forced low-power reset provides the minimum data retention time. The retention time calculation is derived from:

$$i = C \frac{dV}{dt} \Rightarrow t_{RDR} = C \frac{\Delta V}{i}$$

where:

$$C = 100 \mu\text{F}$$

$$i = \text{Typical } I_{DD} \text{ current when battery removed @ } 25^{\circ}\text{C} = 100 \text{ nA}$$

$$\Delta V = \text{Voltage difference of where the LVI forces entry into low-power reset mode } (V_{DD} = V_{LVR}) \text{ to the guaranteed RAM retention voltage}$$

Assuming a run current less than 10 mA, the voltage drop from the time the LVI senses the low voltage to the time the LVI forces entry into low-power reset mode is negligible (< 1 mV).

Example calculation:

$$t_{\text{RDR}} = 100 \mu\text{F} \frac{1.8 \text{ V} - 1.3 \text{ V}}{0.1 \mu\text{A}} = 500 \text{ seconds}$$

7.6 Central Processor Unit (CPU)

7.6.1 Wait Mode

The WAIT instruction:

- Clears the interrupt mask (I bit) in the condition code register, enabling interrupts. After exit from wait mode by interrupt, the I bit remains clear. After exit by reset, the I bit is set.
- Disables the CPU clock

7.6.2 Stop Mode

The STOP instruction:

- Clears the interrupt mask (I bit) in the condition code register, enabling external interrupts. After exit from stop mode by external interrupt, the I bit remains clear. After exit by reset, the I bit is set.
- Disables the CPU clock

After exiting stop mode, the CPU clock begins running after the system stabilization delay.

7.7 Break Module (BRK)

7.7.1 Wait Mode

If enabled, the break module is active in wait mode. In the break routine, the user can subtract one from the return address on the stack if the BW bit in the break status register is set.

7.7.2 Stop Mode

The break module is inactive in stop mode. A break interrupt causes exit from stop mode and sets the BW bit in the break status register.

7.8 Computer Operating Properly Module (COP)

7.8.1 Wait Mode

The COP remains active in wait mode. To prevent a COP reset during wait mode, periodically clear the COP counter in a CPU interrupt routine.

7.8.2 Stop Mode

Stop mode turns off the CGMXCLK input to the COP and clears the COP prescaler. Service the COP immediately before entering or after exiting stop mode to ensure a full COP timeout period after entering or exiting stop mode.

The STOP bit in the configuration register (CONFIG) enables the STOP instruction. To prevent inadvertently turning off the COP with a STOP instruction, disable the STOP instruction by clearing the STOP bit.

7.9 External Interrupt Module (IRQ)

7.9.1 Wait Mode

The IRQ module remains active in wait mode. Clearing the IMASK1 bit in the IRQ status and control register enables $\overline{\text{IRQ1}}$ CPU interrupt requests to bring the MCU out of wait mode.

7.9.2 Stop Mode

The IRQ module remains active in stop mode. Clearing the IMASK1 bit in the IRQ status and control register enables $\overline{\text{IRQ1}}$ CPU interrupt requests to bring the MCU out of stop mode.

7.10 Keyboard Interrupt Module (KBI)

7.10.1 Wait Mode

The keyboard module remains active in wait mode. Clearing the IMASKK bit in the keyboard status and control register enables keyboard interrupt requests to bring the MCU out of wait mode.

7.10.2 Stop Mode

The keyboard module remains active in stop mode. Clearing the IMASKK bit in the keyboard status and control register enables keyboard interrupt requests to bring the MCU out of stop mode.

7.11 Low-Voltage Inhibit Module (LVI)

7.11.1 Wait Mode

The LVI module remains active in wait mode. The LVI module can force entry into the low-power reset mode if a V_{DD} voltage below the V_{LVR} threshold is detected.

7.11.2 Stop Mode

The LVI module is disabled in stop mode. The LVI module cannot generate a reset and bring the MCU out of stop mode.

7.12 Carrier Modulator Transmitter (CMT)

7.12.1 Wait Mode

The CMT remains active in wait mode. Any enabled CPU interrupt request from the CMT can bring the MCU out of wait mode.

If CMT functions are not required during wait mode, reduce power consumption by stopping the CMT before executing the WAIT instruction.

7.12.2 Stop Mode

The CMT is inactive in stop mode. The STOP instruction does not affect register states or the state of the CMT counter. CMT operation resumes when the MCU exits stop mode after an external interrupt.

7.13 Timer Interface Module (TIM0I)

7.13.1 Wait Mode

The TIM0I remains active in wait mode. Any enabled CPU interrupt request from the TIM0I can bring the MCU out of wait mode.

If TIM0I functions are not required during wait mode, reduce power consumption by stopping the TIM0I before executing the WAIT instruction.

7.13.2 Stop Mode

The TIM0I is inactive in stop mode. The STOP instruction does not affect register states or the state of the TIM0I counter. TIM0I operation resumes when the MCU exits stop mode after an external interrupt.

7.14 Exiting Wait Mode

These events restart the CPU clock and load the program counter with the reset vector or with an interrupt vector:

- External reset — A logic 0 on the $\overline{\text{RST}}$ pin resets the MCU and loads the program counter with the contents of locations \$FFFE and \$FFFF.
- External interrupt — A high-to-low transition on an external interrupt pin ($\overline{\text{IRQ1}}$ pin) loads the program counter with the contents of locations \$FFFA and \$FFFB.
- Break interrupt — A break interrupt loads the program counter with the contents of \$FFFC and \$FFFD.
- Computer operating properly module (COP) reset — A timeout of the COP counter resets the MCU and loads the program counter with the contents of \$FFFE and \$FFFF.
- Low-voltage inhibit module (LVI) reset — A V_{DD} voltage below the V_{LVR} voltage forces entry into the low-power reset mode.

- Carrier modulator transmitter module (CMT) interrupt — A CPU interrupt request from the CMT module (end of cycle detect) loads the program counter with the contents of \$FFF8 and \$FFF9.
- Timer interface module (TIM0I) interrupt — A CPU interrupt request from the TIM0I (TIM0I overflow) loads the program counter with the contents of \$FFF6 and \$FFE7.
- Keyboard module (KBI) interrupt — A CPU interrupt request from the KBI module loads the program counter with the contents of \$FFF4 and \$FFF5.

7.15 Exiting Stop Mode

These events restart the system clocks and load the program counter with the reset vector or with an interrupt vector:

- External reset — A logic 0 on the $\overline{\text{RST}}$ pin resets the MCU and loads the program counter with the contents of locations \$FFFE and \$FFFF.
- External interrupt — A high-to-low transition on an external interrupt pin loads the program counter with the contents of locations:
 - \$FFFA and \$FFFB ($\overline{\text{IRQ1}}$ pin)
 - \$FFF4 and \$FFF5 (keyboard interrupt pins)
- Break interrupt — A break interrupt loads the program counter with the contents of locations \$FFFC and \$FFFD.

Upon exit from stop mode, the system clocks begin running after the system stabilization delay. A 12-bit stop recovery counter inhibits the system clocks for 4096 CGMXCLK cycles after the reset or external interrupt.

During this stabilization period, the LVI is enabled and a low V_{DD} will force entry into the low-power reset mode.

The short stop recovery bit, SSREC, in the configuration register controls the system stabilization delay during stop recovery. When the

configuration is selected, stop recovery time is reduced from 4096 CGMXCLK cycles to 32 CGMXCLK cycles.

NOTE: *Use the full stop recovery time ($SSREC = 0$) in applications that use an external crystal.*

Section 8. Low-Voltage Inhibit (LVI)

8.1 Contents

8.2	Introduction	89
8.3	Features	90
8.4	Functional Description	90
8.4.1	False Trip Protection	91
8.4.2	Short Stop Recovery Option	92
8.5	LVI Status Register	92
8.6	LVI Interrupts	92
8.7	Low-Power Modes	93
8.7.1	Wait Mode	93
8.7.2	Stop Mode	93

8.2 Introduction

The low-voltage inhibit (LVI) module monitors the voltage on the V_{DD} pin and will set a low-voltage sense bit when V_{DD} voltage falls to the LVI sense voltage. The LVI will force a low-power reset when the V_{DD} voltage falls to the LVI trip voltage.

8.3 Features

Features of the LVI module include:

- Detects two levels of low battery condition
- Forces entry into low-power reset mode
- Disabled during stop mode
- Disabled during low-power reset mode

8.4 Functional Description

Figure 8-1 shows the structure of the LVI module, which contains a bandgap reference circuit and two comparators. The LVI monitors V_{DD} voltage during normal MCU operation and is disabled when in stop mode or low-power reset mode. When enabled, the LVI module forces entry into low-power reset mode when V_{DD} falls below the V_{LVR} threshold.

Once a low-power reset occurs, the MCU remains in low-power reset mode until the BATT pin sees a rising edge (batteries are removed and then reinstalled). That is, the LVI can force MCU entry into the low-power reset mode, but it is dependent on other chip circuits to bring the MCU out of a low-power reset. A low-power reset also drives the RST pin low to provide low-voltage protection to external peripheral devices.

See **7.5 Low-Power Reset Mode**.

In addition to forcing a reset condition, the LVI module has a second circuit dedicated to detecting low batteries. When V_{DD} falls below V_{LVS} , the output of the weak battery comparator asserts the LOWV flag in the LVI status register (LVISR). In applications that require detecting low batteries, software can monitor by polling the LOWV bit.

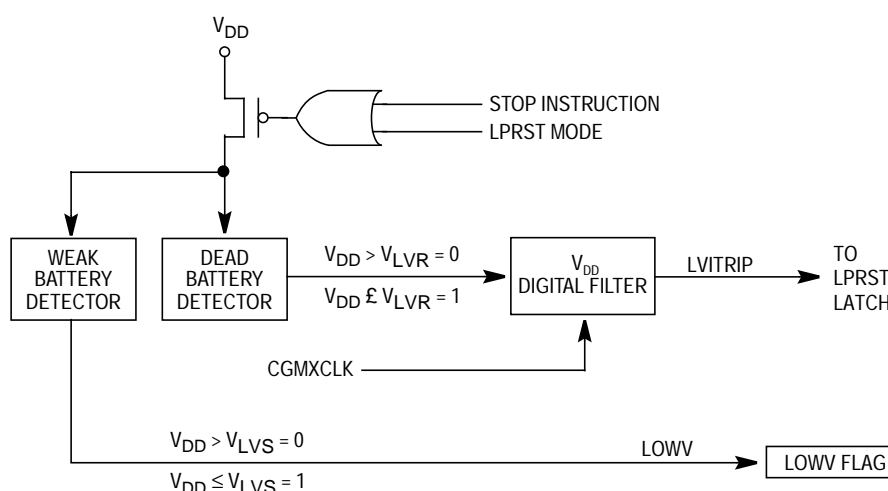


Figure 8-1. LVI Module Block Diagram

8.4.1 False Trip Protection

The V_{DD} pin level is digitally filtered to reduce false dead battery detection due to power supply noise. For the LVI module to reset due to a low-power supply, V_{DD} must remain at or below the V_{LVR} level for a minimum 32 to 40 CGMXCLK cycles. See [Table 8-1](#).

Table 8-1. LVI Digital Filter Characteristics

V_{DD}		Result
At Level:	For Number of CGMXCLK Cycles:	
$V_{DD} > V_{LVR}$	Any	Filter counter remains clear
$V_{DD} < V_{LVR}$	< 32 CGMXCLK cycles	No reset, continue counting CGMXCLK
$V_{DD} < V_{LVR}$	Between 32 and 40 CGMXCLK cycles	LVI may force entry into LPRST after 32 CGMXCLK
$V_{DD} < V_{LVR}$	> 40 CGMXCLK cycles	LVI guaranteed to force entry into LPRST mode

8.4.2 Short Stop Recovery Option

The LVI has an enable time of t_{EN} . The system stabilization time for power on reset and long stop recovery (both 4096 CGMXCLK cycles) gives a delay longer than the LVI enable time for these startup scenarios. There is no period where the MCU is not protected from a low-power condition. However, when using the short stop recovery mask option, the 32 CGMXCLK delay must be greater than the LVI turn on time to avoid a period in startup where the LVI is not protecting the MCU.

8.5 LVI Status Register

The LVI status register flags V_{DD} voltages below the V_{LVS} level.

Address: \$001D

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	R	R	LOWV	0	0	0	0	R
Write:								
Reset:	0	0	0	0	0	0	0	0

= Unimplemented
 R = Reserved

Figure 8-2. LVI Status Register (LVISR)

LOWV— LVI Low Indicator Bit

This read-only flag becomes set when the LVI is detecting V_{DD} voltage below the V_{LVS} threshold.

8.6 LVI Interrupts

The LVI module does not generate CPU interrupt requests.

8.7 Low-Power Modes

The STOP and WAIT instructions put the MCU in low power-consumption standby modes.

8.7.1 Wait Mode

The LVI module remains active in wait mode. The LVI module can force entry into the low-power reset mode if a V_{DD} voltage below the V_{LVR} voltage is detected.

8.7.2 Stop Mode

The LVI module is disabled in stop mode. The LVI module cannot generate a reset and bring the MCU out of stop mode.

Section 9. Oscillator

9.1 Contents

9.2	Introduction	95
9.3	Oscillator External Connections	96
9.4	I/O Signals	97
9.4.1	Crystal Amplifier Input Pin (OSC1)	97
9.4.2	Crystal Amplifier Output Pin (OSC2)	97
9.4.3	Oscillator Enable Signal (SIMOSCEN)	97
9.4.4	External Clock Source (CGMXCLK)	97
9.4.5	Oscillator Out (CGMOUT)	97
9.4.6	Bus Clocks	97
9.5	Low-Power Modes	98
9.5.1	Wait Mode	98
9.5.2	Stop Mode	98
9.6	Oscillator During Break Mode	98

9.2 Introduction

The oscillator circuit is designed for use with crystals or ceramic resonators. The oscillator circuit generates the crystal clock signal, CGMXCLK, at the frequency of the crystal. This signal is divided by two before being passed on to the system integration module (SIM) for bus clock generation.

Figure 9-1 shows the structure of the oscillator. The oscillator requires various external components.

9.3 Oscillator External Connections

In its typical configuration, the oscillator requires five external components. The crystal oscillator is normally connected in a Pierce oscillator configuration, as shown in [Figure 9-1](#). This figure shows only the logical representation of the internal components and may not represent actual circuitry. The oscillator configuration uses five components:

1. Crystal, X_1
2. Fixed capacitor, C_1
3. Tuning capacitor, C_2 , which can also be a fixed capacitor
4. Feedback resistor, R_B
5. Optional series resistor, R_S

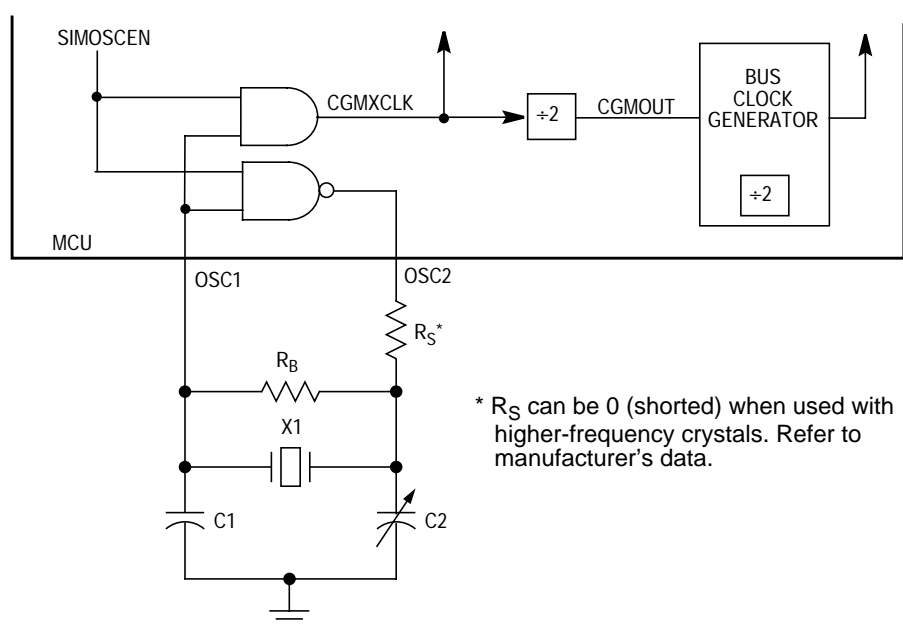


Figure 9-1. Oscillator External Connections

The series resistor (R_S) is included in the diagram to follow strict Pierce oscillator guidelines and may not be required for all ranges of operation, especially with high-frequency crystals. Refer to the crystal manufacturer's data for more information.

9.4 I/O Signals

This section describes the oscillator input/output (I/O) signals.

9.4.1 Crystal Amplifier Input Pin (OSC1)

The OSC1 pin is an input to the crystal oscillator amplifier.

9.4.2 Crystal Amplifier Output Pin (OSC2)

The OSC2 pin is the output of the crystal oscillator inverting amplifier.

9.4.3 Oscillator Enable Signal (SIMOSCEN)

The SIMOSCEN signal enables the oscillator.

9.4.4 External Clock Source (CGMXCLK)

CGMXCLK is the crystal oscillator output signal. It runs at the full speed of the crystal (f_{XCLK}) and comes directly from the crystal oscillator circuit. [Figure 9-1](#) shows only the logical relation of CGMXCLK to OSC1 and OSC2 and may not represent the actual circuitry. The duty cycle of CGMXCLK is unknown and may depend on the crystal and other external factors. Also, the frequency and amplitude of CGMXCLK can be unstable at startup.

9.4.5 Oscillator Out (CGMOUT)

CGMOUT is the clock output of the OSC circuits. This signal is used for generation of the MCU bus clocks. CGMOUT is a 50 percent duty cycle clock running at twice the bus frequency.

9.4.6 Bus Clocks

Several bus clocks that are derived from the CGMOUT signal are one fourth the CGMXCLK frequency.

9.5 Low-Power Modes

The WAIT and STOP instructions put the MCU in low power-consumption standby modes.

9.5.1 Wait Mode

The WAIT instruction has no effect on the oscillator logic. CGMXCLK and CGMOUT clocks continue to be driven out.

9.5.2 Stop Mode

The STOP instruction disables the CGMXCLK and CGMOUT outputs.

9.6 Oscillator During Break Mode

The oscillator continues to drive CGMXCLK when the chip enters the break state.

Section 10. Mask Option Register (MOR)

10.1 Contents

10.2	Introduction	99
10.3	Functional Description	100

10.2 Introduction

This section describes the mask option register (MOR). The mask options are hard-wired connections specified at the same time as the ROM code, which allow the user to customize the MCU. The MOR controls the enable or disable of these functions:

- ROM security⁽¹⁾
- Stop mode recovery time (32 CGMXCLK cycles or 4096 CGMXCLK cycles)
- COP timeout period ($2^{18} - 2^4$ or $2^{13} - 2^4$ CGMXCLK cycles)
- STOP instruction
- Computer operating properly module (COP)

1. No security feature is absolutely secure. However, Motorola's strategy is to make reading or copying the ROM contents difficult for unauthorized users.

10.3 Functional Description

The MOR is a read-only register. A write to this location will have no effect.

Address: \$001F

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	0	0	0	ROMSEC	SSREC	COPRS	STOP	COPD
Write:								
Reset:	Unaffected by reset							
	<div></div> = Unimplemented							

Figure 10-1. Mask Option Register (MOR)

ROMSEC — ROM Security Bit

ROMSEC enables the ROM security feature. Setting the ROMSEC prevents unauthorized reading of the ROM contents. Access is denied to unauthorized users of customer specific software.

- 1 = ROM security enabled
- 0 = ROM security disabled

SSREC — Short Stop Recovery Bit

SSREC enables the CPU to exit stop mode with a delay of 32 CGMXCLK cycles instead of a 4096 CGMXCLK cycle delay.

- 1 = Stop mode recovery after 32 CGMXCLK cycles
- 0 = Stop mode recovery after 4096 CGMXCLKC cycles

NOTE: *Exiting stop mode by pulling reset will result in the long stop recovery.*

If using an external crystal oscillator, do not set the SSREC bit.

The LVI has an enable time of t_{EN} . The standard system stabilization time for power on reset and long stop recovery (both 4096 CGMXCLK cycles) gives a delay longer than the LVI enable time for these startup scenarios. There is no period where the MCU is not protected from a low-power condition. However, when using the short stop recovery configuration option, the 32 CGMXCLK delay must be greater than the LVI's turn on time to avoid a period in startup where the LVI is not protecting the MCU.

COPRS — COP Rate Select Bit

COPRS selects the COP timeout period. Reset clears COPRS. (See [Section 16. Computer Operating Properly \(COP\)](#).)

1 = COP timeout period = $2^{13} - 2^4$ CGMXCLK cycles

0 = COP timeout period = $2^{18} - 2^4$ CGMXCLK cycles

STOP — STOP Instruction Enable Bit

STOP enables the STOP instruction.

1 = STOP instruction enabled

0 = STOP instruction treated as illegal opcode

COPD — COP Disable Bit

COPD disables the COP module. (See [Section 16. Computer Operating Properly \(COP\)](#).)

1 = COP module disabled

0 = COP module enabled

Mask Option Register (MOR)

Section 11. Input/Output Ports (I/O)

11.1 Contents

11.2	Introduction	103
11.3	Port A	105
11.3.1	Port A Data Register	105
11.3.2	Data Direction Register A	105
11.4	Port B	107
11.4.1	Port B Data Register	107
11.4.2	Data Direction Register B	108
11.5	Port C	110
11.5.1	Port C Data Register	110
11.5.2	Data Direction Register C	111

11.2 Introduction

Twenty bidirectional input/output (I/O) pins form three parallel ports. All I/O pins are programmable as inputs or outputs.

NOTE: *Connect any unused I/O pins to an appropriate logic level, either V_{DD} or V_{SS} . Although the I/O ports do not require termination for proper operation, termination reduces excess current consumption and the possibility of electrostatic damage.*

Input/Output Ports (I/O)

Addr.	Register Name		Bit 7	6	5	4	3	2	1	Bit 0
\$0000	Port A Data Register (PTA) See page 105 .	Read:	PTA7	PTA6	PTA5	PTA4	PTA3	PTA2	PTA1	PTA0
		Write:								
		Reset:	Unaffected by reset							
		\$0001	Port B Data Register (PTB) See page 107 .	Read:	PTB7	PTB6	PTB5	PTB4	PTB3	PTB2
Write:										
Reset:	Unaffected by reset									
\$0002	Port C Data Register (PTC) See page 110 .			Read:					PTC3	PTC2
		Write:								
		Reset:	Unaffected by reset							
		\$0004	Data Direction Register A (DDRA) See page 105 .	Read:	DDRA7	DDRA6	DDRA5	DDRA4	DDRA3	DDRA2
Write:										
Reset:	0			0	0	0	0	0	0	0
\$0005	Data Direction Register B (DDRB) See page 108 .			Read:	DDRB7	DDRB6	DDRB5	DDRB4	DDRB3	DDRB2
		Write:								
		Reset:	0	0	0	0	0	0	0	0
		\$0006	Data Direction Register C (DDRC) See page 111 .	Read:					DDRC3	DDRC2
Write:										
Reset:	Unaffected by reset				0	0	0	0		
				= Unimplemented						


 = Unimplemented

Figure 11-1. I/O Port Register Summary

11.3 Port A

Port A is an 8-bit, general-purpose, bidirectional I/O port.

11.3.1 Port A Data Register

The port A data register (PTA) contains a data latch for each of the eight port A pins.

Address: \$0000

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	PTA7	PTA6	PTA5	PTA4	PTA3	PTA2	PTA1	PTA0
Write:								
Reset:	Unaffected by reset							

Figure 11-2. Port A Data Register (PTA)

PTA7–PTA0 — Port A Data Bits

These read/write bits are software programmable. Data direction of each port A pin is under the control of the corresponding bit in data direction register A. Reset has no effect on port A data.

11.3.2 Data Direction Register A

Data direction register A (DDRA) determines whether each port A pin is an input or an output. Writing a logic 1 to a DDRA bit enables the output buffer for the corresponding port A pin; a logic 0 disables the output buffer.

Address: \$0004

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	DDRA7	DDRA6	DDRA5	DDRA4	DDRA3	DDRA2	DDRA1	DDRA0
Write:								
Reset:	0	0	0	0	0	0	0	0

Figure 11-3. Data Direction Register A (DDRA)

DDRA7–DDRA0 — Data Direction Register A Bits

These read/write bits control port A data direction. Reset clears DDRA7–DDRA0, configuring all port A pins as inputs.

1 = Corresponding port A pin configured as output

0 = Corresponding port A pin configured as input

NOTE: Avoid glitches on port A pins by writing to the port A data register before changing data direction register A bits from 0 to 1.

Figure 11-4 shows the port A I/O logic.

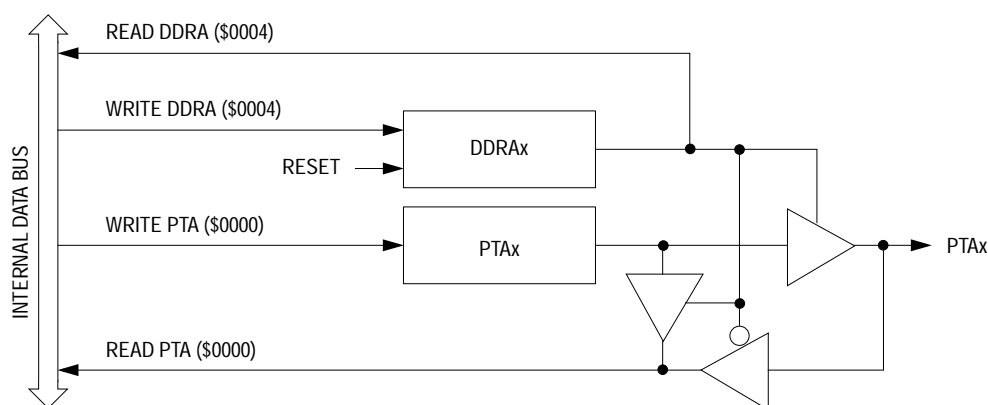


Figure 11-4. Port A I/O Circuit

When bit DDRAx is a logic 1, reading address \$0000 reads the PTAX data latch. When bit DDRAx is a logic 0, reading address \$0000 reads the voltage level on the pin. The data latch can always be written, regardless of the state of its data direction bit. Table 11-1 summarizes the operation of the port A pins.

Table 11-1. Port A Pin Functions

DDRA Bit	PTA Bit	I/O Pin Mode	Accesses to DDRA	Accesses to PTA	
			Read/Write	Read	Write
0	X ⁽¹⁾	Input, Hi-Z ⁽²⁾	DDRA7–DDRA0	Pin	PTA7–PTA0 ⁽³⁾
1	X	Output	DDRA7–DDRA0	PTA7–PTA0	PTA7–PTA0

1. X = Don't care

2. Hi-Z = High impedance

3. Writing affects data register, but does not affect input.

11.4 Port B

Port B is an 8-bit, general-purpose, bidirectional I/O port that shares its pins with the keyboard interrupt module (KBI).

11.4.1 Port B Data Register

The port B data register (PTB) contains a data latch for each of the eight port B pins.

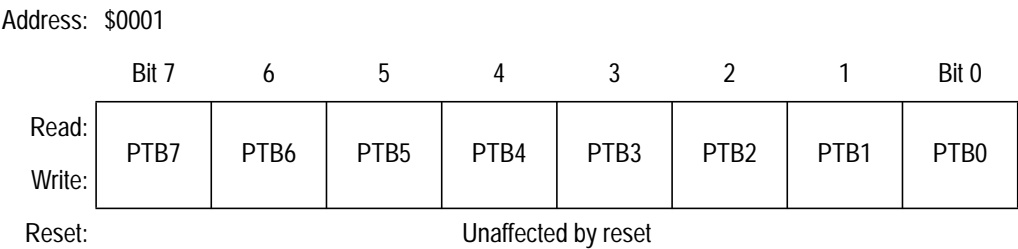


Figure 11-5. Port B Data Register (PTB)

PTB7–PTB0 — Port B Data Bits

These read/write bits are software-programmable. Data direction of each port B pin is under the control of the corresponding bit in data direction register B. Reset has no effect on port B data.

The keyboard interrupt enable bits, KBIE7–KBIE0, in the keyboard interrupt control register (KBICR), enable the port B pins as external interrupt pins. (See [Section 15. Keyboard Interrupt Module \(KBI\)](#).)

11.4.2 Data Direction Register B

Data direction register B (DDRB) determines whether each port B pin is an input or an output. Writing a logic 1 to a DDRB bit enables the output buffer for the corresponding port B pin; a logic 0 disables the output buffer.

Address: \$0005

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	DDRB7	DDRB6	DDRB5	DDRB4	DDRB3	DDRB2	DDRB1	DDRB0
Write:								
Reset:	0	0	0	0	0	0	0	0

Figure 11-6. Data Direction Register B (DDRB)

DDRB7–DDRB0 — Data Direction Register B Bits

These read/write bits control port B data direction. Reset clears DDRB7–DDRB0, configuring all port B pins as inputs.

1 = Corresponding port B pin configured as output

0 = Corresponding port B pin configured as input

NOTE: Avoid glitches on port B pins by writing to the port B data register before changing data direction register B bits from 0 to 1.

Figure 11-7 shows the port B I/O logic.

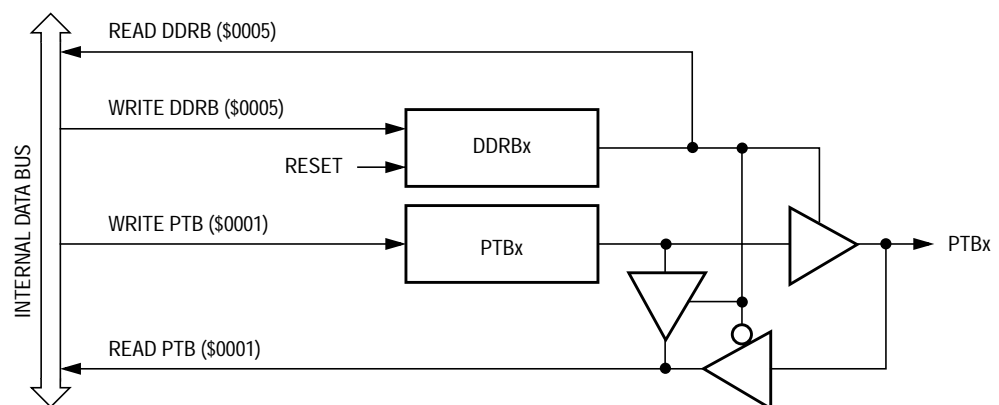


Figure 11-7. Port B I/O Circuit

When bit DDRBx is a logic 1, reading address \$0001 reads the PTBx data latch. When bit DDRBx is a logic 0, reading address \$0001 reads the voltage level on the pin. The data latch can always be written, regardless of the state of its data direction bit. [Table 11-2](#) summarizes the operation of the port B pins.

Table 11-2. Port B Pin Functions

DDRB Bit	PTB Bit	I/O Pin Mode	Accesses to DDRB	Accesses to PTB	
			Read/Write	Read	Write
0	X ⁽¹⁾	Input, Hi-Z ⁽²⁾	DDRB7–DDRB0	Pin	PTB7–PTB0 ⁽³⁾
1	X	Output	DDRB7–DDRB0	PTB7–PTB0	PTB7–PTB0

1. X = Don't care
2. Hi-Z = High impedance
3. Writing affects data register, but does not affect input.

11.5 Port C

Port C is an 8-bit, general-purpose, bidirectional I/O port. PTC0–PTC3 have higher than standard current drive capabilities. Refer to [Section 19. Electrical Specifications](#) for the port C drive specifications.

11.5.1 Port C Data Register

The port C data register (PTC) contains a data latch for each of the four port C pins.

Address: \$0002

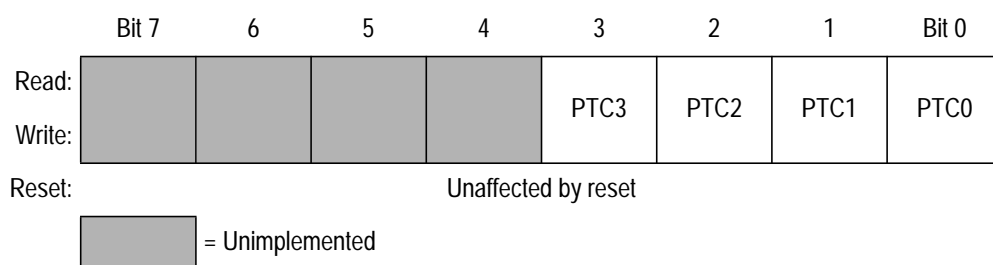


Figure 11-8. Port C Data Register (PTC)

PTC3–PTC0 — Port C Data Bits

These read/write bits are software-programmable. Data direction of each port C pin is under the control of the corresponding bit in data direction register C. Reset has no effect on port C data.

11.5.2 Data Direction Register C

Data direction register C (DDRC) determines whether each port C pin is an input or an output. Writing a logic 1 to a DDRC bit enables the output buffer for the corresponding port C pin; a logic 0 disables the output buffer.

Address: \$0006

	Bit 7	6	5	4	3	2	1	Bit 0
Read:					DDRC3	DDRC2	DDRC1	DDRC0
Write:								
Reset:	Unaffected by reset				0	0	0	0


 = Unimplemented

Figure 11-9. Data Direction Register C (DDRC)

DDRC3–DDRC0 — Data Direction Register C Bits

These read/write bits control port C data direction. Reset clears DDRC3–DDRC0, configuring all port C pins as inputs.

1 = Corresponding port C pin configured as output

0 = Corresponding port C pin configured as input

NOTE: *Avoid glitches on port C pins by writing to the port C data register before changing data direction register C bits from 0 to 1.*

Figure 11-10 shows the port C I/O logic.

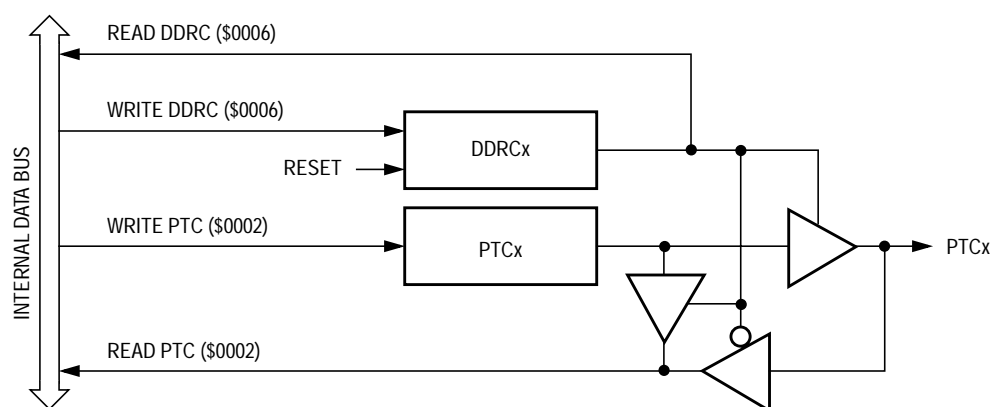


Figure 11-10. Port C I/O Circuit

When bit DDRCx is a logic 1, reading address \$0002 reads the PTCx data latch. When bit DDRCx is a logic 0, reading address \$0002 reads the voltage level on the pin. The data latch can always be written, regardless of the state of its data direction bit. [Table 11-3](#) summarizes the operation of the port C pins.

Table 11-3. Port C Pin Functions

DDRC Bit	PTC Bit	I/O Pin Mode	Accesses to DDRC	Accesses to PTC	
			Read/Write	Read	Write
0	X ⁽¹⁾	Input, Hi-Z ⁽²⁾	DDRC3–DDRC0	Pin	PTC3–PTC0 ⁽³⁾
1	X	Output	DDRC3–DDRC0	PTC3–PTC0	PTC3–PTC0

1. X = don't care
2. Hi-Z = high impedance
3. Writing affects data register, but does not affect input.

Section 12. Carrier Modulator Transmitter (CMT)

12.1 Contents

12.2	Introduction	114
12.3	Clock Generation	114
12.4	Overview	116
12.5	Carrier Generator	118
12.5.1	Time Counter	119
12.6	Modulator	120
12.6.1	Time Mode	122
12.6.1.1	Synchronization of Modulator and Carrier Generator in Time Mode	123
12.6.2	Baseband Mode	123
12.6.3	FSK Mode	124
12.6.4	Extended Space Operation	125
12.6.4.1	EXSPC Operation in Time Mode	125
12.6.4.2	EXSPC Operation in FSK Mode	126
12.7	Transmitter	127
12.8	IRO Latch	127
12.9	Flags and Interrupts	128
12.10	I/O Registers	129
12.10.1	Carrier Generator Data Registers (CCH1, CCL1, CCH2, and CCL2)	129
12.10.2	CMT Modulator Control and Status Register	132
12.10.3	CMT Modulator Data Registers (CMD1, CMD2, and CMD3)	135
12.11	Wait Mode Operation	136
12.12	Stop Mode Operation	136

12.2 Introduction

The carrier modulator transmitter (CMT) module provides a means to generate the protocol timing and carrier signals for a wide variety of encoding schemes. The CMT incorporates hardware to off-load the critical and/or lengthy timing requirements associated with code generation from the central processor unit (CPU), releasing much of its bandwidth to handle other tasks such as code data generation, data decompression, or keyboard scanning.

The CMT does not include dedicated hardware configurations for specific protocols but is intended to be sufficiently programmable in its function to handle the timing requirements of most protocols with minimal CPU intervention. When the modulator is disabled, certain CMT registers can be used to change the state of the infrared out pin (IRO) directly. This feature allows for the generation of future protocols not readily producible by the current architecture.

12.3 Clock Generation

The CMT module uses the CGMOUT signal from the oscillator circuits as a clock. With an 8-MHz crystal, CGMOUT is a 4-MHz clock. The DIV2 bit in the CMT modulator control and status register (CMCS) provides an option to divide the CMT clock source by another divide-by-2 circuit, thus extending the CMT periods. The block diagram for CMT clock circuits is shown in [Figure 12-1](#).

[Table 12-1](#) shows the relationship between typical system clock values and the CMT operating speeds.

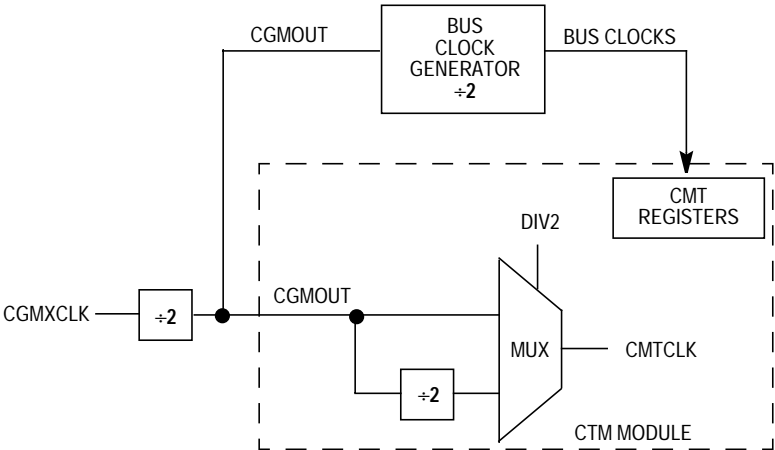


Figure 12-1. CMT Clock Generation

Table 12-1. System Clock Examples

Crystal (MHz)	Internal Bus (MHz)	CGMOUT (MHz) (Feed to CMT)	DIV2 Bit	Carrier Generator Resolution (μs)	Min Carrier Generator Period (μs)	Min Modulator Period (μs)
8	2	4	0	0.25	0.5	2
8	2	4	1	0.5	1	4
4	1	2	0	0.5	1	4
4	1	2	1	1	2	8

NOTE: Period and frequency calculations shown in [Table 12-1](#) will be affected by the state of the DIV2 bit.

When DIV2 is set:

$$\text{CMTCLK} = \frac{\text{CGMOUT}}{2} = \frac{\text{CGMXCLK}}{4}$$

When DIV2 is clear:

$$\text{CMTCLK} = \text{CGMOUT} = \frac{\text{CGMXCLK}}{2}$$

12.4 Overview

The module consists of:

- Carrier generator
- Modulator
- Transmitter output
- Registers

The block diagram is shown in **Figure 12-2**. The module has three main modes of operation: time, baseband, and frequency shift key (FSK).

When operating in time mode, the user independently defines the high and low times of the carrier signal to determine both period and duty cycle. The carrier generator resolution is 250 ns when operating with an 8-MHz crystal and the DIV2 bit in the CMCS clear. The carrier generator can generate signals with periods between 500 ns (2 MHz) and 31.5 μ s (31.75 kHz) in steps of 250 ns. The possible duty cycle options will depend upon the number of counts required to complete the carrier period.

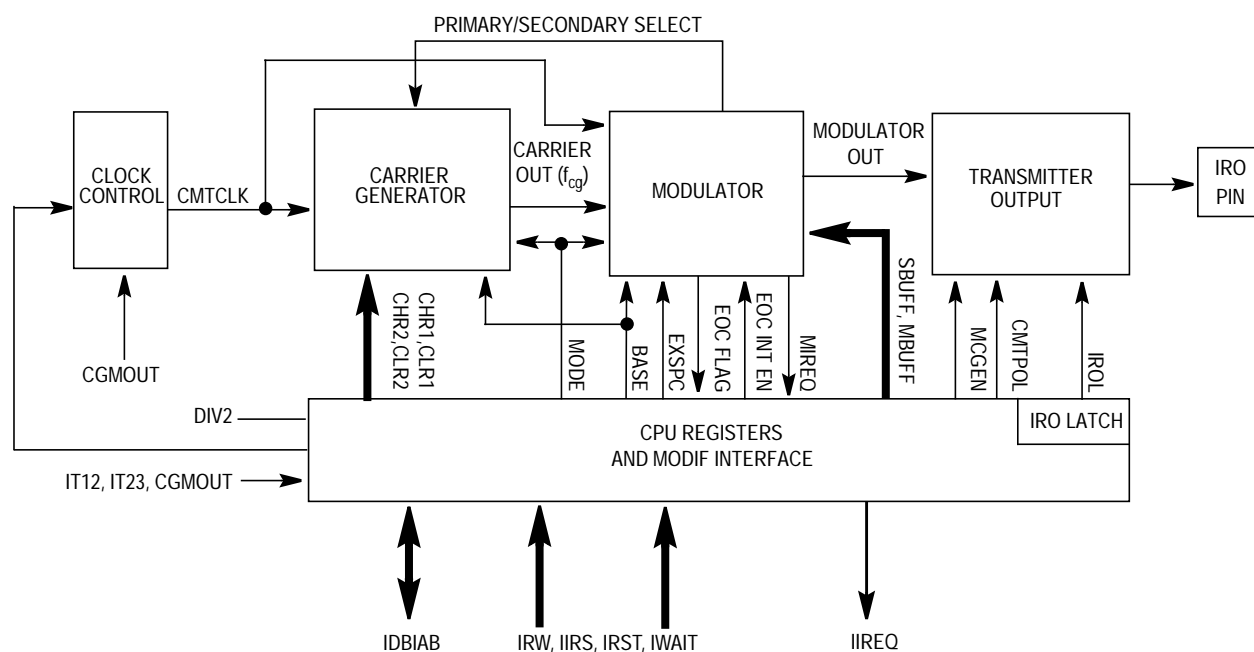


Figure 12-2. Carrier Modulator Transmitter Module Block Diagram

For example, an 800-kHz signal has a period of 1.25 μ s and will therefore require 5 x 250 ns counts to generate. These counts may be split between high and low times so the duty cycles available will be:

- 20 percent (one high, four low)
- 40 percent (two high, three low)
- 60 percent (three high, two low)
- 80 percent (four high, one low)

For lower frequency signals with larger periods, higher resolution (as a percentage of the total period) duty cycles are possible.

When the BASE bit in the CMT modulator control and status register (CMCS) is set, the carrier output to the modulator is held high continuously to allow for the generation of baseband protocols.

A third mode allows the carrier generator to alternate between two sets of high and low times. When operating in FSK mode, the generator will toggle between the two sets when instructed by the modulator, allowing the user to dynamically switch between two carrier frequencies without CPU intervention.

The modulator provides a simple method to control protocol timing. The modulator has a resolution of 2 μ s with an 8-MHz oscillator. It can count system clocks (to provide real-time control) or it can count carrier clocks (for self-clocked protocols). See [12.6 Modulator](#) for more details.

The transmitter output block controls the state of the infrared out pin (IRO). The modulator output is gated on to the IRO pin when the modulator/carrier generator is enabled. When the module is not enabled, the IRO pin is controlled by the state of the IRO latch. A polarity bit enables the IRO pin to be high true or low true. See [12.8 IRO Latch](#).

A summary of the possible modes is shown in [Table 12-2](#).

Table 12-2. CMT Modes of Operation

Mode	MCGEN Bit ⁽¹⁾	BASE Bit ⁽²⁾	MODE Bit ⁽²⁾	EXSPC Bit	Comment
Time	1	0	0	0	f_{cg} controlled by primary high and low registers. f_{cg} transmitted to IRO pin when modulator gate is open.
Baseband	1	1	0	0	f_{cg} is always high. IRO pin high when modulator gate is open.
FSK	1	0	1	0	f_{cg} control alternates between primary high/low registers and secondary high/low registers. f_{cg} transmitted to IRO pin when modulator gate is open.
Extended space	1	x	x	1	Setting the EXSPC bit causes subsequent modulator cycles to be spaces (modulator out not asserted) for the duration of the modulator period (mark and space times).
IRO latch	0	x	x	x	IRO latch controls state of IRO pin. The IRO latch can be written to on positive or negative edge of internal bus clock.

1. To prevent spurious operation, initialize all data and control registers before beginning a transmission (MCGEN = 1).
2. These bits are not double buffered and should not be changed during a transmission (while MCGEN = 1).

12.5 Carrier Generator

The carrier signal is generated by counting a register-selected number of input clocks (250 ns for an 8-MHz oscillator) for both the carrier high time and the carrier low time. The period is determined by the total number of clocks counted. The duty cycle is determined by the ratio of high time clocks to total clocks counted. The high and low time values are user programmable and are held in two registers.

An alternate set of high/low count values is held in another set of registers to allow the generation of dual frequency FSK (frequency shift keying) protocols without CPU intervention.

NOTE: *Data values for the high and low times should be non-zero to prevent spurious operation.*

The MCGEN bit in the CMCS must be set and the BASE bit in the CMCS must be cleared to enable carrier generator clocks. When the BASE bit in the CMT modulator control and status register (CMCS) is set, the carrier output to the modulator is held high continuously. The block diagram is shown in **Figure 12-3**.

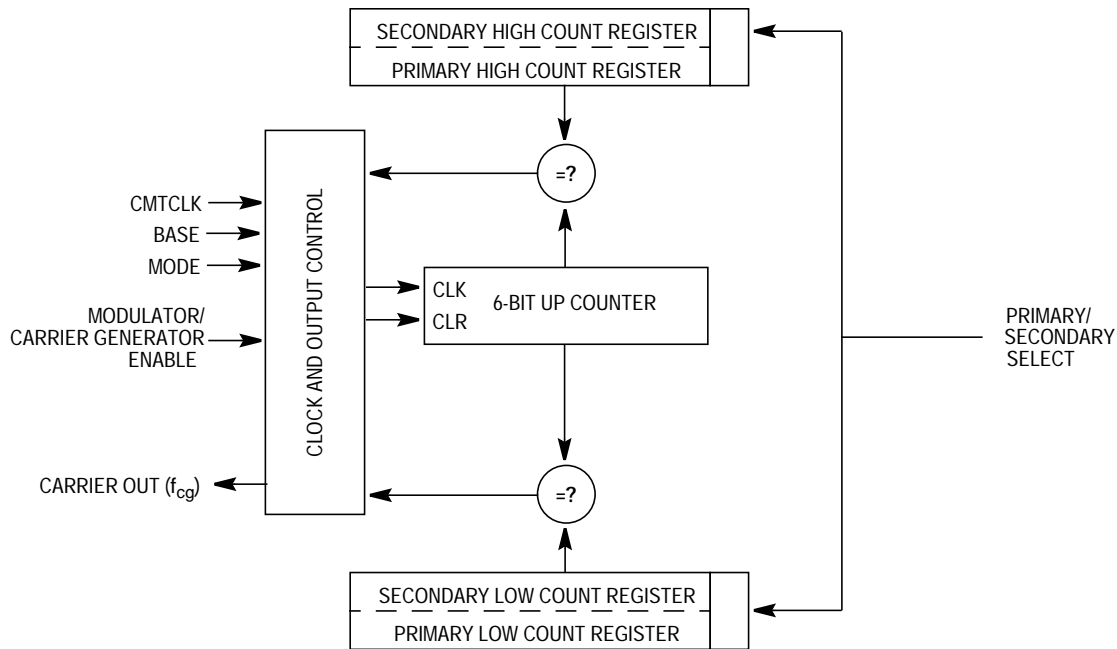


Figure 12-3. Carrier Generator Block Diagram

12.5.1 Time Counter

The high/low time counter is a 6-bit up counter. After each increment, the contents of the counter are compared with the appropriate high or low count value register. When the compare value is reached, the counter is reset (to a value of 1) and the compare is redirected to the other count value register.

Assuming that the high time count compare register is currently active, a valid compare will cause the carrier output to be driven low. The counter will continue to increment (starting at reset value of 1). When the value stored in the selected low count value register is reached, the counter will again be reset and the carrier output will be driven high.

Carrier Modulator Transmitter (CMT)

The cycle repeats, automatically generating a periodic signal which is directed to the modulator. The lowest frequency (maximum period) and highest frequency (minimum period) which can be generated are:

$$f_{\max} = \text{CMTCLK} \div (2 \times 1) \text{ Hz}$$

$$f_{\min} = \text{CMTCLK} \div (2 \times (2^6 - 1)) \text{ Hz}$$

In the general case, the carrier generator output frequency is:

$$f_{\text{cg}} = \text{CMTCLK} \div (\text{Highcount} + \text{Lowcount}) \text{ Hz}$$

Where:

$$0 < \text{Highcount} < 64$$

$$0 < \text{Lowcount} < 64$$

The duty cycle of the carrier signal is controlled by varying the ratio of high time to low + high time. As the input clock period is fixed, the duty cycle resolution will be proportional to the number of counts required to generate the desired carrier period.

$$\text{Duty Cycle} = \frac{\text{Highcount}}{\text{Highcount} + \text{Lowcount}}$$

12.6 Modulator

The modulator has three main modes of operation:

1. The modulator can gate the carrier onto the modulator output (TIME).
2. The modulator can control the logic level of the modulator output (BASEBAND).
3. The modulator can count carrier periods and instruct the carrier generator to alternate between two carrier frequencies whenever a modulation period (mark + space counts) expires (FSK)

The modulator includes a 13-bit down counter with underflow detection. The counter is loaded from the 12-bit modulation mark period buffer register, MBUFF. The most significant bit is loaded with a 0 and serves as a sign bit. When the counter holds a positive value, the modulator gate is open and the carrier signal is driven to the transmitter block.

When the counter underflows, the modulator gate is closed and a 12-bit comparator is enabled which compares the logical complement of the contents of the decrementing counter with the contents of the modulation space period register, SREG.

When a match is obtained, the cycle repeats by opening the modulator gate, reloading the counter with the contents of MBUFF and reloading SREG with the contents of SBUFF.

Should $SREG = 0$, the match will be immediate and no space period will be generated (for instance, for FSK protocols which require successive bursts of different frequencies).

The MCGEN bit in the CMCS must be set to enable the modulator timer. The 12-bit MBUFF and SBUFF registers are accessed through three 8-bit modulator period registers, CMD1, CMD2, and CMD3.

Refer to [Figure 12-4](#) for a block diagram of the modulator.

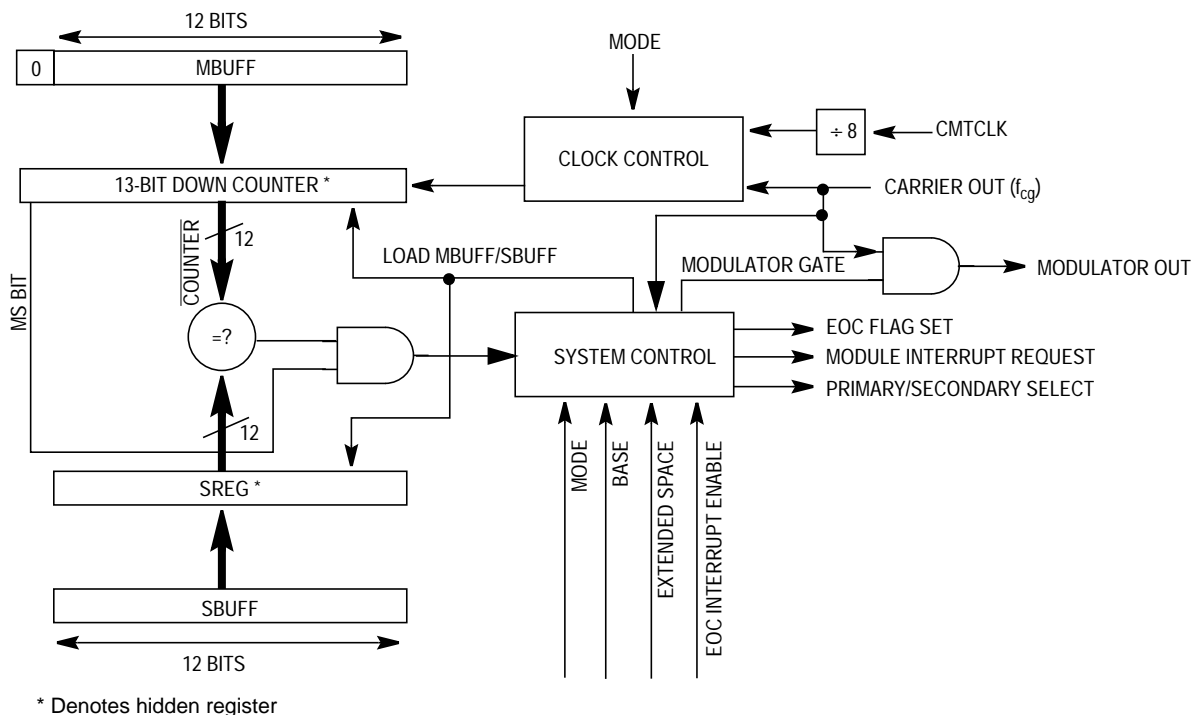


Figure 12-4. Modulator Block Diagram

12.6.1 Time Mode

When the modulator operates in time mode (BASE bit is clear, MODE bit is clear), the modulation mark period consists of an integer number of $\text{CMTCLK} \div 8$ clocks. The modulation space period consists of 0 or an integer number of $\text{CMTCLK} \div 8$ clocks. The mark and space periods are controlled by the MBUFF and SBUFF registers, respectively. With a 2-MHz crystal and $\text{DIV2} = 0$, the modulator resolution is 4 μs and has a maximum mark and space period of about 16 ms each. See [Figure 12-5](#) for an example of the time mode output.

The mark and space time equations for time and baseband mode are:

$$t_{\text{mark}} = \frac{(\text{MBUFF} + 1) \times 8}{\text{CMTCLK}} \text{ secs}$$

$$t_{\text{space}} = \frac{\text{SBUFF} \times 8}{\text{CMTCLK}} \text{ secs}$$

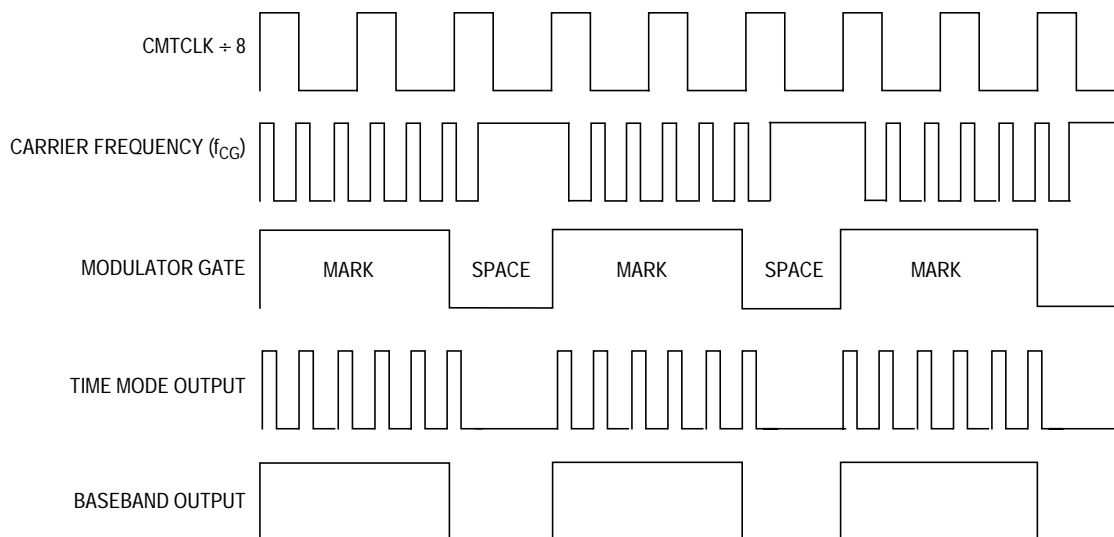


Figure 12-5. CMT Operation in Time Mode

12.6.1.1 Synchronization of Modulator and Carrier Generator in Time Mode

To prevent carrier glitches which could affect carrier spectral purity, the modulator control gate and carrier clock are synchronized. The carrier signal is activated when the modulator gate opens. The modulator gate can close only when the carrier signal is low (the output logic level during space periods is low).

When the modulator gate closes, the carrier is reset to a 1 on the next rising edge of CMTCLK. The carrier counter is held in the reset state until the beginning of the next mark period.

In some special cases, where the carrier is high for the duration of the space period, the modulator gate does not close and the carrier continues to be gated to the IRO output without interruption into the next mark period. These special cases can occur when modulation space periods are shorter than carrier high times.

12.6.2 Baseband Mode

Baseband mode (BASE bit is set, MODE bit is clear) is a derivative of time mode, where the mark and space period is based on $(\text{CMTCLK} \div 8)$ counts. The mark and space calculations are the same as in time mode. In this mode the modulator output will be at a logic 1 for the duration of the mark period and at a logic 0 for the duration of a space period. See [Figure 12-5](#).

12.6.3 FSK Mode

When the modulator operates in FSK mode, the modulation mark and space periods consist of an integer number of carrier clocks (space period can be 0). When the mark period expires, the space period is transparently started (as in time mode). The carrier generator toggles between primary and secondary data register values whenever the modulator space period expires.

The space period provides an interpulse gap (no carrier). If SBUFF = 0, then the modulator and carrier generator will switch between carrier frequencies without a gap or any carrier glitches (0 space).

Using timing data for carrier burst and interpulse gap length calculated by the CPU, FSK mode can automatically generate a phase-coherent, dual-frequency FSK signal with programmable burst and interburst gaps.

The mark and space time equations for FSK mode are:

$$t_{\text{mark}} = \frac{\text{MBUFF} + 1}{f_{\text{CG}}} \text{secs}$$

$$t_{\text{space}} = \frac{\text{SBUFF}}{f_{\text{CG}}} \text{secs}$$

Where f_{CG} is the frequency output from the carrier generator.

12.6.4 Extended Space Operation

In either time, baseband, or FSK mode, the space period can be made longer than the maximum possible value of SBUFF. Setting the EXSPC bit in the CMCS will force the modulator to treat the next modulation period (beginning with the next load of MBUFF/SBUFF) as a space period equal in length to the mark and space counts combined. Subsequent modulation periods will consist entirely of these extended space periods with no mark periods. Clearing EXSPC will return the modulator to standard operation at the beginning of the next modulation period.

12.6.4.1 EXSPC Operation in Time Mode

To calculate the length of an extended space in time or baseband modes, use the equation:

$$t_{\text{espace}} = \frac{((\text{SBUFF}_1) + (\text{MBUFF}_2 + 1 + \text{SBUFF}_2) + \dots (\text{MBUFF}_n + 1 + \text{SBUFF}_n)) \times 8}{\text{CMTCLK}} \text{ secs}$$

Where the subscripts 1, 2, ... n refer to the modulation periods that elapsed while the EXSPC bit was set.

For an example of extended space operation, see [Figure 12-6](#).

NOTE: The EXSPC feature can be used to emulate a zero mark event.

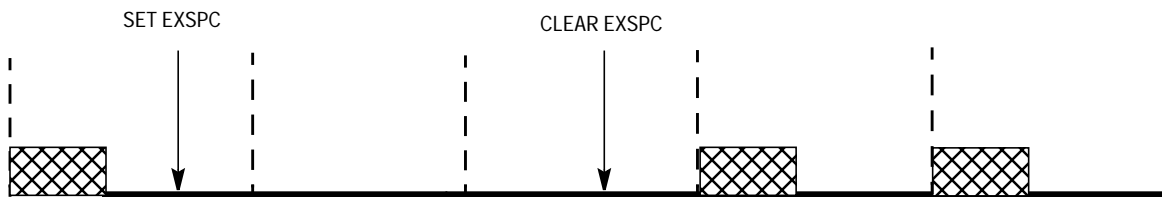


Figure 12-6. Extended Space Operation

12.6.4.2 EXSPC Operation in FSK Mode

In FSK mode, the modulator continues to count f_{CG} clocks, alternating between the primary and secondary registers at the end of each modulation period.

To calculate the length of an extended space in FSK mode, one needs to know whether the EXSPC bit was set on a primary or secondary modulation period. A status bit for the current modulation is not accessible to the CPU. If necessary, software should maintain tracking of the current modulation cycle (primary or secondary).

If the EXSPC bit was set during a primary modulation cycle, use the equation:

$$t_{EXSPACE} = \frac{SBUF_1}{f_{CG1}} + \frac{MBUFF_2 + 1 + SBUF_2}{f_{CG2}} + \frac{MBUFF_3 + 1 + SBUF_3}{f_{CG1}} + \dots \text{secs}$$

Where:

- The subscripts 1, 2, ... n refer to the modulation periods that elapsed while the EXSPC bit was set.
- f_{cg1} is the frequency output from the carrier generator for the primary registers.
- f_{cg2} is the frequency output from the carrier generator for the secondary registers.

If the EXSPC bit was set during a secondary modulation cycle, use the equation:

$$t_{EXSPACE} = \frac{SBUF_1}{f_{CG2}} + \frac{MBUFF_2 + 1 + SBUF_2}{f_{CG1}} + \frac{MBUFF_3 + 1 + SBUF_3}{f_{CG2}} + \dots \text{secs}$$

12.7 Transmitter

The transmitter output block controls the state of the infrared out pin (IRO). The modulator output is gated onto the IRO pin when the modulator/carrier generator is enabled. When the modulator/carrier generator is disabled, the IRO pin is controlled by the state of the IRO latch.

A polarity bit in the CCH1 register enables the IRO pin to be high true or low true.

12.8 IRO Latch

The IRO latch is accessible to the CPU through bit 7 of the carrier generator data registers CCH1 (IROLN bit) and CCL1 (IROLP bit). When the MCGEN bit is clear, the IRO latch is driven to the IRO pin.

Through the IROLN and IROLP bits, the IRO latch can be written on either edge of the internal bus clock, allowing for IR waveforms which have a resolution of twice the bus clock frequency (CGMOUT).

When IROLN is written, the IRO latch will be updated with the new data on the negative edge of the internal bus clock.

When IROLP is written, the IRO latch will be updated with the new data on the positive edge of the internal bus clock.

12.9 Flags and Interrupts

The end-of-cycle (EOCF) flag is set:

- When the modulator is not currently active and the MCGEN bit is set to begin the initial CMT transmission
- At the end of each modulation cycle (when the counter is reloaded from MBUFF) while the MCGEN bit is set

In the condition where the MCGEN bit is cleared and then set before the end of the modulation cycle, the EOC will not be set when the MCGEN is set, but will become set at the end of the current modulation cycle.

When the MCGEN becomes disabled, the CMT module does not set the EOC flag at the end of the last modulation cycle.

The EOCF bit is cleared by reading the CMT modulator control and status register (CMCS) followed by an access of CMD2 or CMD3.

If the EOC interrupt enable (EOCIE) bit was previously set, the CMT module will generate an interrupt request to the CPU. The EOCF bit must be cleared within the interrupt service routine (ISR) to prevent another interrupt being generated after exiting the ISR. If the EOC interrupt is not being used (EOCIE = 0), the EOCF flag need not be cleared.

The EOC interrupt is coincidental with reloading the down-counter with the contents of MBUFF and reloading the SREG with the contents of SBUFF. The EOC interrupt provides a means for the user to reload new mark/space values into the MBUFF and SBUFF registers. An MBUFF and/or SBUFF update will take effect at the end of the current modulation cycle.

NOTE: *The down-counter and SREG are updated at the end of every modulation cycle, irrespective of interrupt handling and the state of the EOCF flag.*

12.10 I/O Registers

These I/O registers control and monitor CMT operation:

- CMT carrier generator data registers (CCH1, CCL1, CCH2, CCL2)
- CMT modulator control and status register (CMCS)
- CMT modulator period data registers (CMD1, CMD2, CMD3)

12.10.1 Carrier Generator Data Registers (CCH1, CCL1, CCH2, and CCL2)

The carrier generator contains:

- One 8-bit data register — CMT primary high time, CCH1
- One 7-bit data register — CMT primary low time, CCL1
- Two 6-bit data registers:
 - CMT secondary high time, CCH2
 - CMT secondary low time, CCL2

Bit 7 of CCH1 and CCL1 is used to read and write the IRO latch.

Register Name and Address: CCH1—\$0010

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	IROLN	CMPOL	PH5	PH4	PH3	PH2	PH1	PH0
Write:								
Reset:	0	0	Unaffected by reset					

Register Name and Address: CCL1—\$0011

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	IROLP	0	PL5	PL4	PL3	PL2	PL1	PL0
Write:								
Reset:	0	0	0	Unaffected by reset				

**Figure 12-7. CMT Carrier Generator Data Register
(CCH1, CCL1, CCH2, and CCL2)**

Carrier Modulator Transmitter (CMT)

Register Name and Address: CCH2—\$0012

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	0	0	SH5	SH4	SH3	SH2	SH1	SH0
Write:								
Reset:	0	0	0	Unaffected by reset				

Register Name and Address: CCL2—\$0013

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	0	0	SL5	SL4	SL3	SL2	SL1	SL0
Write:								
Reset:	0	0	0	Unaffected by reset				


 = Unimplemented

Figure 12-7. CMT Carrier Generator Data Register (CCH1, CCL1, CCH2, and CCL2) (Continued)

PH0–PH5 and PL0–PL5 — Primary Carrier High and Low Time Data Values

When selected, these bits contain the number of input clocks required to generate the carrier high and low time periods. When operating in time mode (see [12.6.1 Time Mode](#)), this register pair is always selected. When operating in FSK mode (see [12.6.3 FSK Mode](#)), this register pair and the secondary register pair are alternately selected under control of the modulator. The primary carrier high and low time values are undefined out of reset. These bits must be written to non-zero values before the carrier generator is enabled to avoid spurious results.

NOTE: Writing to CCH1 to update PH0–PH5 or to CCL1 to update PL0–PL5 will also update the IRO latch. When MCGEN (bit 0 in the CMCS) is clear, the IRO latch value appears on the IRO output pin. Care should be taken that bit 7 of the data to be written to CCH1 or CCL1 should contain the desired state of the IRO latch.

Additionally, writing to CCH1 to update PH0–PH5 will also update the CMT polarity bit. Care should be taken that bit 6 of the data to be written to CCH1 should contain the desired state of the polarity bit.

SH0–SH5 and SL0–SL5 — Secondary Carrier High and Low Time Data Values

When selected, these bits contain the number of input clocks required to generate the carrier high and low time periods. When operating in time mode (see [12.6.1 Time Mode](#)), this register pair is never selected. When operating in FSK mode (see [12.6.3 FSK Mode](#)), this register pair and the primary register pair are alternately selected under control of the modulator. The secondary carrier high and low time values are undefined out of reset. These bits must be written to non-zero values before the carrier generator is enabled when operating in FSK mode.

CMPOL — CMT Output Polarity Bit

This bit controls the polarity of the CMT output (IRO). When this bit is a 0, then the CMT output is active high. When this bit is set to 1 the CMT output is active low, in other words inverted. The reset state of this bit is 0.

IROLN and IROLP — IRO Latch Control Bit

Reading IROLN or IROLP reads the state of the IRO latch. Writing IROLN updates the IRO latch with the data being written on the negative edge of the internal processor clock (IT12). Writing IROLP updates the IRO latch on the positive edge of the internal processor clock; for example, one CGMOUT period later. The IRO latch is clear out of reset.

NOTE: *Writing to CCH1 to update IROLN or to CCL1 to update IROLP will also update the primary carrier high and low data values. Care should be taken that bits 5–0 of the data to be written to CCH1 or CCL1 should contain the desired values for the primary carrier high or low data.*

In addition, writing to CCH1 to update IROLN will update the CMT polarity bit. Care should be taken that bit 6 of the data to be written to CCH1 should contain the desired values for the polarity bit.

12.10.2 CMT Modulator Control and Status Register

The CMT modulator control and status register (CMCS) contains the modulator and carrier generator enable (MCGEN), interrupt enable (EOCIE), mode select (MODE), baseband enable (BASE), extended space (EXSPC), divide-by-two prescaler (DIV2) bit, and the end of cycle (EOCF) status bit.

Address: \$0014

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	EOCF		0	EXSPC	BASE	MODE	EOCIE	MCGEN
Write:		DIV2						
Reset:	0	0	0	0	0	0	0	0


 = Unimplemented

Figure 12-8. CMT Modulator Control and Status Register (CMCS)

EOCF — End-of-Cycle Status Flag

1 = End of modulator cycle has occurred.

0 = No end of modulation cycle occurrence since flag last cleared

EOCF is set when:

- The modulator is not currently active and the MCGEN bit is set to begin the initial CMT transmission.
- At the end of each modulation cycle while the MCGEN bit is set. This is recognized when a match occurs between the contents of the space period register, SREG, and the down counter. At this time, the counter is initialized with the (possibly new) contents of the mark period buffer, MBUFF, and the space period register, SREG, is loaded with the (possibly new) contents of the space period buffer, SBUFF.

This flag is cleared by a read of the CMCS followed by an access of CMD2 or CMD3. The EOC flag is cleared by reset.

In the condition where the MCGEN bit is cleared and then set before the end of the modulation cycle, the EOC will not be set when the MCGEN is set, but will become set at the end of the current modulation cycle.

When the MCGEN becomes disabled, the CMT module does not set the EOC flag at the end of the last modulation cycle.

DIV2 — Divide-by-Two Prescaler Bit

1 = Divide-by-two prescaler enabled

0 = Divide-by-two prescaler disabled

The divide-by-two prescaler causes the CMT to be clocked at the bus rate when enabled and 2 x the bus rate when disabled (CGMOUT).

Since this bit is not double buffered, it should not be set during a transmission.

EXSPC — Extended Space Enable Bit

1 = Extended space enabled

0 = Extended space disabled

For a description of the extended space enable bit, see [12.6.4 Extended Space Operation](#). This bit is cleared by reset.

BASE — Baseband Enable Bit

1 = Baseband enabled

0 = Baseband disabled

When set, the BASE bit disables the carrier generator and forces the carrier output high for generation of baseband protocols. When BASE is clear, the carrier generator is enabled and the carrier output toggles at the frequency determined by values stored in the carrier data registers. See [12.6.2 Baseband Mode](#). This bit is cleared by reset. This bit is not double buffered and should not be written to during a transmission.

MODE — Mode Select Bit

1 = CMT operates in FSK mode.

0 = CMT operates in time mode.

For a description of CMT operation in time mode, see [12.6.1 Time Mode](#). For a description of CMT operation in FSK mode, see [12.6.3 FSK Mode](#). This bit is cleared by reset. This bit is not double buffered and should not be written to during a transmission.

EOCIE — End-of-Cycle Interrupt Enable Bit

1 = CPU interrupt enabled

0 = CPU interrupt disabled

A CPU interrupt will be requested when EOCF is set if EOCIE was previously set. If EOCIE is clear, EOCF will not request a CPU interrupt.

MCGEN — Modulator and Carrier Generator Enable Bit

1 = Modulator and carrier generator enabled

0 = Modulator and carrier generator disabled

Setting MCGEN will initialize the carrier generator and modulator and will enable all clocks. Once enabled, the carrier generator and modulator will function continuously. When MCGEN is cleared, the current modulator cycle will be allowed to expire before all carrier and modulator clocks are disabled (to save power) and the modulator output is forced low. To prevent spurious operation, the user should initialize all data and control registers before enabling the system. This bit is cleared by reset.

12.10.3 CMT Modulator Data Registers (CMD1, CMD2, and CMD3)

The 12-bit MBUFF and SBUFF registers are accessed through three 8-bit registers, CMD1, CMD2, and CMD3. CMD2 and CMD3 contain the least significant eight bits of MBUFF and SBUFF respectively. CMD1 contains the two most significant nibbles of MBUFF and SBUFF. In many applications, periods greater than those obtained by eight bits will not be required. Splitting the registers up in this manner allows the user to clear CMD1 and generate 8-bit periods with just two data writes.

Register Name and Address: CMD1—\$0015

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	MB11	MB10	MB9	MB8	SB11	SB10	SB9	SB8
Write:								
Reset:	Unaffected by reset							

Register Name and Address: CMD2—\$0016

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	MB7	MB6	MB5	MB4	MB3	MB2	MB1	MB0
Write:								
Reset:	Unaffected by reset							

Register Name and Address: CMD3—\$0017

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	SB7	SB6	SB5	SB4	SB3	SB2	SB1	SB0
Write:								
Reset:	Unaffected by reset							

**Figure 12-9. CMT Modulator Data Registers
(CMD1, CMD2, and CMD3)**

12.11 Wait Mode Operation

During wait mode the CMT, if enabled, will continue to operate normally. However, there will be no new codes or changes of pattern mode while in wait mode, as the CPU is not operating.

12.12 Stop Mode Operation

During stop mode, clocks to the CMT module are halted. No registers are affected.

NOTE: *Notice that because the clocks are halted, the CMT will resume upon exit from stop. Software should ensure that the stop mode is not entered while the modulator is still in operation to prevent the IRO pin from being asserted while in stop mode. This may require a timeout period from the time that the MCGEN bit is cleared to allow the last modulator cycle to complete.*

Section 13. Modulo Timer (TIM0I)

13.1 Contents

13.2	Introduction	137
13.3	Features	138
13.4	Functional Description	138
13.4.1	TIM0I Counter Prescaler	139
13.5	Interrupts	140
13.6	Low-Power Modes	140
13.6.1	Wait Mode	140
13.6.2	Stop Mode	140
13.7	TIM0I During Break Interrupts	141
13.8	I/O Registers	141
13.8.1	TIM0I Status and Control Register	141
13.8.2	TIM0I Counter Registers	144
13.8.3	TIM0I Counter Modulo Registers	145

13.2 Introduction

This section describes the modulo timer (TIM0I) which is a periodic interrupt timer whose counter is clocked internally via software programmable options. **Figure 13-1** is a block diagram of the TIM0I.

13.3 Features

Features of the TIM0I include:

- Programmable TIM0I clock input
- Free-running or modulo up-count operation
- TIM0I counter stop and reset bits

13.4 Functional Description

Figure 13-1 shows the structure of the TIM0I. The central component of the TIM0I is the 16-bit TIM0I counter that can operate as a free-running counter or a modulo up-counter. The counter provides the timing reference for the interrupt. The TIM0I counter modulo registers, TMODH and TMDL, control the modulo value of the counter. Software can read the counter value at any time without affecting the counting sequence.

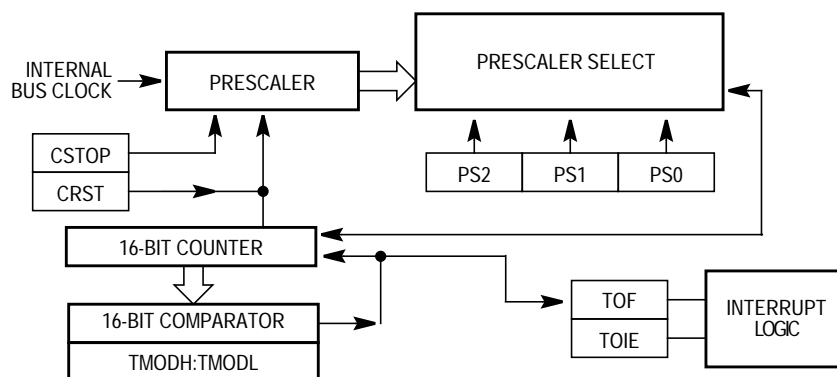


Figure 13-1. TIM0I Block Diagram

Addr.	Register Name		Bit 7	6	5	4	3	2	1	Bit 0
\$0018	TIM Status and Control Register (TSC) See page 142 .	Read:	TOF	TOIE	TSTOP	0	0	PS2	PS1	PS0
		Write:	0			TRST				
		Reset:	0	0	1	0	0	0	0	0
\$0019	TIM Counter Register High (TCNTH) See page 144 .	Read:	Bit 15	14	13	12	11	10	9	Bit 8
		Write:								
		Reset:	0	0	0	0	0	0	0	0
\$001A	TIM Counter Register Low (TCNTL) See page 144 .	Read:	Bit 7	6	5	4	3	2	1	Bit 0
		Write:								
		Reset:	0	0	0	0	0	0	0	0
\$001B	TIM Counter Modulo Register High (TMODH) See page 145 .	Read:	Bit 15	14	13	12	11	10	9	Bit 8
		Write:								
		Reset:	1	1	1	1	1	1	1	1
\$001C	TIM Counter Modulo Register Low (TMODL) See page 145 .	Read:	Bit 7	6	5	4	3	2	1	Bit 0
		Write:								
		Reset:	1	1	1	1	1	1	1	1


 = Unimplemented

Table 13-1. TIM0I Register Summary

13.4.1 TIM0I Counter Prescaler

The clock source can be one of the seven prescaler outputs. The prescaler generates seven clock rates from the internal bus clock. The prescaler select bits, PS2–PS0, in the status and control register select the TIM0I clock source.

The value in the TIM0I counter modulo registers and the selected prescaler output determines the frequency of the periodic interrupt. The TIM0I overflow flag (TOF) is set when the TIM0I counter value rolls over to \$0000 after matching the value in the TIM0I counter modulo registers. The TIM0I interrupt enable bit, TOIE, enables TIM0I overflow CPU interrupt requests. TOF and TOIE are in the TIM0I status and control register.

13.5 Interrupts

The TIM0I overflow flag (TOF) can generate an interrupt request. The TOF bit is set when the TIM0I counter value rolls over to \$0000 after matching the value in the TIM0I counter modulo registers. The TIM0I overflow interrupt enable bit, TOIE, enables TIM0I overflow CPU interrupt requests. TOF and TOIE are in the TIM0I status and control register.

13.6 Low-Power Modes

The WAIT and STOP instructions put the MCU in low power-consumption standby modes.

13.6.1 Wait Mode

The TIM0I remains active in wait mode. Any enabled CPU interrupt request from the TIM0I can bring the MCU out of wait mode.

If TIM0I functions are not required during wait mode, reduce power consumption by stopping the TIM0I before executing the WAIT instruction.

13.6.2 Stop Mode

The TIM0I is inactive in stop mode. The STOP instruction does not affect register conditions or the state of the TIM0I counter. TIM0I operation resumes when the MCU exits stop mode after an external interrupt.

13.7 TIM0I During Break Interrupts

A break interrupt stops the TIM0I counter.

The system integration module (SIM) controls whether status bits in other modules can be cleared during the break state. The BCFE bit in the break flag control register (BFCR) enables software to clear status bits during the break state. (See [Section 18. Break Module \(BRK\)](#).)

To allow software to clear status bits during a break interrupt, write a logic 1 to the BCFE bit. If a status bit is cleared during the break state, it remains cleared when the MCU exits the break state.

To protect status bits during the break state, write a logic 0 to the BCFE bit. With BCFE at logic 0 (its default state), software can read and write I/O registers during the break state without affecting status bits. Some status bits have a 2-step read/write clearing procedure. If software does the first step on such a bit before the break, the bit cannot change during the break state as long as BCFE is at logic 0. After the break, doing the second step clears the status bit.

13.8 I/O Registers

These I/O registers control and monitor operation of the TIM0I:

- TIM0I status and control register (TSC)
- TIM0I counter registers (TCNTH and TCNTL)
- TIM0I counter modulo registers (TMODH and TMODL)

13.8.1 TIM0I Status and Control Register

The TIM0I status and control register:

- Enables TIM0I overflow interrupt
- Flags TIM0I overflows
- Stops the TIM0I counter
- Resets the TIM0I counter
- Prescales the TIM0I counter clock

Modulo Timer (TIM0I)

Address: \$0018

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	TOF	TOIE	TSTOP	0	0	PS2	PS1	PS0
Write:	0			TRST				
Reset:	0	0	1	0	0	0	0	0


 = Unimplemented

Figure 13-2. TIM0I Status and Control Register (TSC)

TOF — TIM0I Overflow Flag Bit

This read/write flag is set when the TIM0I counter resets to \$0000 after reaching the modulo value programmed in the TIM0I counter modulo registers. Clear TOF by reading the TIM0I status and control register when TOF is set and then writing a logic 0 to TOF. If another TIM0I overflow occurs before the clearing sequence is complete, then writing logic 0 to TOF has no effect. Therefore, a TOF interrupt request cannot be lost due to inadvertent clearing of TOF. Reset clears the TOF bit. Writing a logic 1 to TOF has no effect.

1 = TIM0I counter has reached modulo value.

0 = TIM0I counter has not reached modulo value.

TOIE — TIM0I Overflow Interrupt Enable Bit

This read/write bit enables TIM0I overflow interrupts when the TOF bit becomes set. Reset clears the TOIE bit.

1 = TIM0I overflow interrupts enabled

0 = TIM0I overflow interrupts disabled

TSTOP — TIM0I Stop Bit

This read/write bit stops the TIM0I counter. Counting resumes when TSTOP is cleared. Reset sets the TSTOP bit, stopping the TIM0I counter until software clears the TSTOP bit.

1 = TIM0I counter stopped

0 = TIM0I counter active

NOTE: Do not set the TSTOP bit before entering wait mode if the TIM0I is required to exit wait mode.

TRST — TIM0I Reset Bit

Setting this write-only bit resets the TIM0I counter and the TIM0I prescaler. Setting TRST has no effect on any other registers. Counting resumes from \$0000. TRST is cleared automatically after the TIM0I counter is reset and always reads as logic 0. Reset clears the TRST bit.

1 = Prescaler and TIM0I counter cleared

0 = No effect

NOTE: *Setting the TSTOP and TRST bits simultaneously stops the TIM0I counter at a value of \$0000.*

PS2–PS0 — Prescaler Select Bits

These read/write bits select one of the seven prescaler outputs as the input to the TIM0I counter as [Table 13-2](#) shows. Reset clears the PS2–PS0 bits.

Table 13-2. Prescaler Selection

PS2–PS0	TIM0I Clock Source
000	Internal bus clock ÷ 1
001	Internal bus clock ÷ 2
010	Internal bus clock ÷ 4
011	Internal bus clock ÷ 8
100	Internal bus clock ÷ 16
101	Internal bus clock ÷ 32
110	Internal bus clock ÷ 64
111	Internal bus clock ÷ 64

13.8.2 TIM0I Counter Registers

The two read-only TIM0I counter registers contain the high and low bytes of the value in the TIM0I counter. Reading the high byte (TCNTH) latches the contents of the low byte (TCNTL) into a buffer. Subsequent reads of TCNTH do not affect the latched TCNTL value until TCNTL is read. Reset clears the TIM0I counter registers. Setting the TIM0I reset bit (TRST) also clears the TIM0I counter registers.

NOTE: If TCNTH is read during a break interrupt, be sure to unlatch TCNTL by reading TCNTL before exiting the break interrupt. Otherwise, TCNTL retains the value latched during the break.

Register Name and Address: TCNTH—\$0019

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	Bit 15	14	13	12	11	10	9	Bit 8
Write:								
Reset:	0	0	0	0	0	0	0	0

Register Name and Address: TCNTL—\$001A

	Bit 7	6	5	4	3	2	1	Bit 0
Read:								
Write:								
Reset:	0	0	0	0	0	0	0	0

= Unimplemented

Figure 13-3. TIM0I Counter Registers (TCNTH and TCNTL)

13.8.3 TIM0I Counter Modulo Registers

The read/write TIM0I modulo registers contain the modulo value for the TIM0I counter. When the TIM0I counter reaches the modulo value, the overflow flag (TOF) becomes set, and the TIM0I counter resumes counting from \$0000 at the next clock. Writing to the high byte (TMODH) inhibits the TOF bit and overflow interrupts until the low byte (TMODL) is written. Reset sets the TIM0I counter modulo registers.

Register Name and Address: TMODH—\$001B

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	Bit 15	14	13	12	11	10	9	Bit 8
Write:								
Reset:	1	1	1	1	1	1	1	1

Register Name and Address: TMODL—\$001C

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	Bit 7	6	5	4	3	2	1	Bit 0
Write:								
Reset:	1	1	1	1	1	1	1	1

Figure 13-4. TIM0I Counter Modulo Registers
(TMODH and TMODL)

NOTE: Reset the TIM0I counter before writing to the TIM0I counter modulo registers.

At every system clock, the TMODH and TMODL value is compared to the TCNTH and TCNTL value. A valid compare flag is asserted on the first cycle in which the values match. If TMODH and TMODL are set to \$0000, a TOF is generated on the first cycle in which the match occurs, but not subsequently. The circuit detects a change in the match value at each clock.

Section 14. External Interrupt (IRQ)

14.1 Contents

14.2	Introduction	147
14.3	Features	147
14.4	Functional Description	148
14.5	$\overline{\text{IRQ1}}$ Pin	149
14.6	IRQ Module During Break Interrupts	150
14.7	IRQ Status and Control Register	151

14.2 Introduction

The external interrupt (IRQ) module provides a maskable interrupt input.

14.3 Features

Features of the IRQ module include:

- A dedicated external interrupt pin ($\overline{\text{IRQ1}}$)
- IRQ1 interrupt control bits
- Hysteresis buffer
- Programmable edge-only or edge- and level-interrupt sensitivity
- Automatic interrupt acknowledge

14.4 Functional Description

A logic 0 applied to the external interrupt pin can latch a central processor unit (CPU) interrupt request. **Figure 14-1** shows the structure of the IRQ module.

NOTE: The IRQ circuits are powered by the chip V_{DD} . External circuits should drive a logic 1 at the V_{DD} level. If external circuits use a pullup device on $\overline{IRQ1}$, the pin should be pulled to V_{DD} and **not** to BATT.

Interrupt signals on the $\overline{IRQ1}$ pin are latched into the IRQ1 latch. An interrupt latch remains set until one of these actions occurs:

- Vector fetch — A vector fetch automatically generates an interrupt acknowledge signal that clears the latch that caused the vector fetch.
- Software clear — Software can clear an interrupt latch by writing to the appropriate acknowledge bit in the interrupt status and control register (ISCR). Writing a logic 1 to the ACK1 bit clears the IRQ1 latch.
- Reset — A reset automatically clears the interrupt latch.

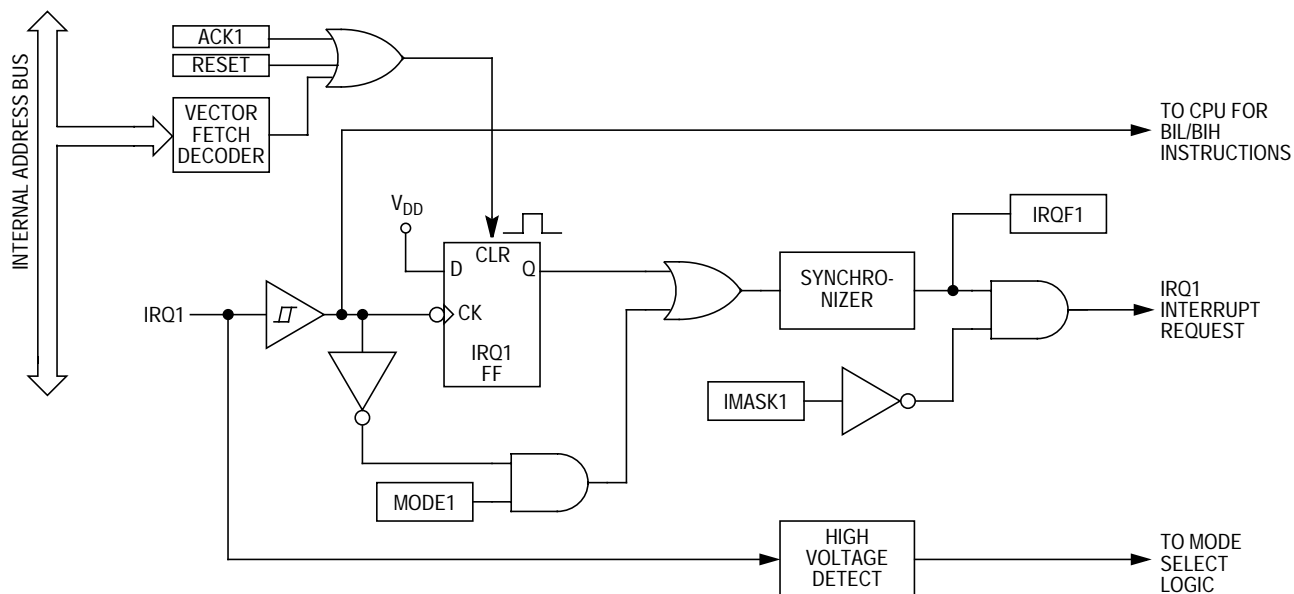


Figure 14-1. IRQ Module Block Diagram

The external interrupt pin is falling-edge-triggered and is software-configurable to be either falling-edge or low-level-triggered. The MODE1 bit in the ISCR controls the triggering sensitivity of the $\overline{\text{IRQ1}}$ pin.

When an interrupt pin is edge-triggered only, the interrupt remains set until a vector fetch, software clear, or reset occurs.

When an interrupt pin is both falling-edge and low-level-triggered, the interrupt remains set until both of these occur:

- Vector fetch or software clear
- Return of the interrupt pin to logic 1

The vector fetch or software clear may occur before or after the interrupt pin returns to logic 1. As long as the pin is low, the interrupt request remains pending. A reset will clear the latch and the MODE1 control bit, thereby clearing the interrupt even if the pin stays low.

When set, the IMASK1 bit in the ISCR masks all external interrupt requests. A latched interrupt request is not presented to the interrupt priority logic unless the IMASK1 bit is clear.

NOTE: *The interrupt mask (I) in the condition code register (CCR) masks all interrupt requests, including external interrupt requests.*

14.5 $\overline{\text{IRQ1}}$ Pin

A logic 0 on the $\overline{\text{IRQ1}}$ pin can latch an interrupt request into the IRQ1 latch. A vector fetch, software clear, or reset clears the IRQ1 latch.

If the MODE1 bit is set, the $\overline{\text{IRQ1}}$ pin is both falling-edge-sensitive and low-level-sensitive. With MODE1 set, both of these actions must occur to clear IRQ1:

- Vector fetch or software clear — A vector fetch generates an interrupt acknowledge signal to clear the latch. Software may generate the interrupt acknowledge signal by writing a logic 1 to the ACK1 bit in the interrupt status and control register (ISCR). The ACK1 bit is useful in applications that poll the $\overline{\text{IRQ1}}$ pin and require software to clear the IRQ1 latch. Writing to the ACK1 bit prior to leaving an interrupt service routine can also prevent

spurious interrupts due to noise. Setting ACK1 does not affect subsequent transitions on the $\overline{\text{IRQ1}}$ pin. A falling edge that occurs after writing to the ACK1 bit generates another interrupt request. If the IRQ1 mask bit, IMASK1, is clear, the CPU loads the program counter with the vector address at locations \$FFFA and \$FFFB.

- Return of the $\overline{\text{IRQ1}}$ pin to logic 1 — As long as the $\overline{\text{IRQ1}}$ pin is at logic 0, IRQ1 remains active.

The vector fetch or software clear and the return of the $\overline{\text{IRQ1}}$ pin to logic 1 may occur in any order. The interrupt request remains pending as long as the $\overline{\text{IRQ1}}$ pin is at logic 0. A reset will clear the latch and the MODE1 control bit, thereby clearing the interrupt even if the pin stays low.

If the MODE1 bit is clear, the $\overline{\text{IRQ1}}$ pin is falling-edge-sensitive only. With MODE1 clear, a vector fetch or software clear immediately clears the IRQ1 latch.

The IRQF1 bit in the ISCR register can be used to check for pending interrupts. The IRQF1 bit is not affected by the IMASK1 bit, which makes it useful in applications where polling is preferred.

Use the BIH or BIL instruction to read the logic level on the $\overline{\text{IRQ1}}$ pin.

NOTE: *When using the level-sensitive interrupt trigger, avoid false interrupts by masking interrupt requests in the interrupt routine.*

14.6 IRQ Module During Break Interrupts

The BCFE bit in the break flag control register (BFCR) enables software to clear the latch during the break state. See [Section 18. Break Module \(BRK\)](#). To allow software to clear the IRQ1 latch during a break interrupt, write a logic 1 to the BCFE bit. If a latch is cleared during the break state, it remains cleared when the MCU exits the break state.

To protect CPU interrupt flags during the break state, write a logic 0 to the BCFE bit. With BCFE at logic 0 (its default state), writing to the ACK1 bit in the IRQ status and control register during the break state has no effect on the IRQ interrupt flags.

14.7 IRQ Status and Control Register

The IRQ status and control register (ISCR) controls and monitors operation of the IRQ module. The ISCR has these functions:

- Shows the state of the IRQ1 flag
- Clears the IRQ1 latch
- Masks IRQ1 interrupt request
- Controls triggering sensitivity of the $\overline{\text{IRQ1}}$ interrupt pin

Address: \$000F

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	0	0	0	0	IRQF1	0	IMASK1	MODE1
Write:						ACK1		
Reset:	0	0	0	0	0	0	0	0


 = Unimplemented

Figure 14-2. IRQ Status and Control Register (ISCR)

IRQF1 — IRQ1 Flag

This read-only status bit is high when the IRQ1 interrupt is pending.

1 = $\overline{\text{IRQ1}}$ interrupt pending

0 = $\overline{\text{IRQ1}}$ interrupt not pending

ACK1 — IRQ1 Interrupt Request Acknowledge Bit

Writing a logic 1 to this write-only bit clears the IRQ1 latch. ACK1 always reads as logic 0. Reset clears ACK1.

IMASK1 — IRQ1 Interrupt Mask Bit

Writing a logic 1 to this read/write bit disables IRQ1 interrupt requests. Reset clears IMASK1.

1 = IRQ1 interrupt requests disabled

0 = IRQ1 interrupt requests enabled

MODE1 — IRQ1 Edge/Level Select Bit

This read/write bit controls the triggering sensitivity of the $\overline{\text{IRQ1}}$ pin. Reset clears MODE1.

1 = $\overline{\text{IRQ1}}$ interrupt requests on falling edges and low levels

0 = $\overline{\text{IRQ1}}$ interrupt requests on falling edges only

Section 15. Keyboard Interrupt Module (KBI)

15.1 Contents

15.2	Introduction	153
15.3	Features	154
15.4	Functional Description	155
15.5	Keyboard Initialization	156
15.6	Low-Power Modes	157
15.6.1	Wait Mode	157
15.6.2	Stop Mode	157
15.7	Keyboard Module During Break Interrupts	158
15.8	I/O Registers	158
15.8.1	Keyboard Status and Control Register	158
15.8.2	Keyboard Interrupt Enable Register	160

15.2 Introduction

The keyboard interrupt module (KBI) provides eight independently maskable external interrupts.

Keyboard Interrupt Module (KBI)

15.3 Features

Features of the KBI include:

- Eight keyboard interrupt pins with separate keyboard interrupt enable bits and one keyboard interrupt mask
- Hysteresis buffers
- Programmable edge-only or edge- and level- interrupt sensitivity
- Exit from low-power modes

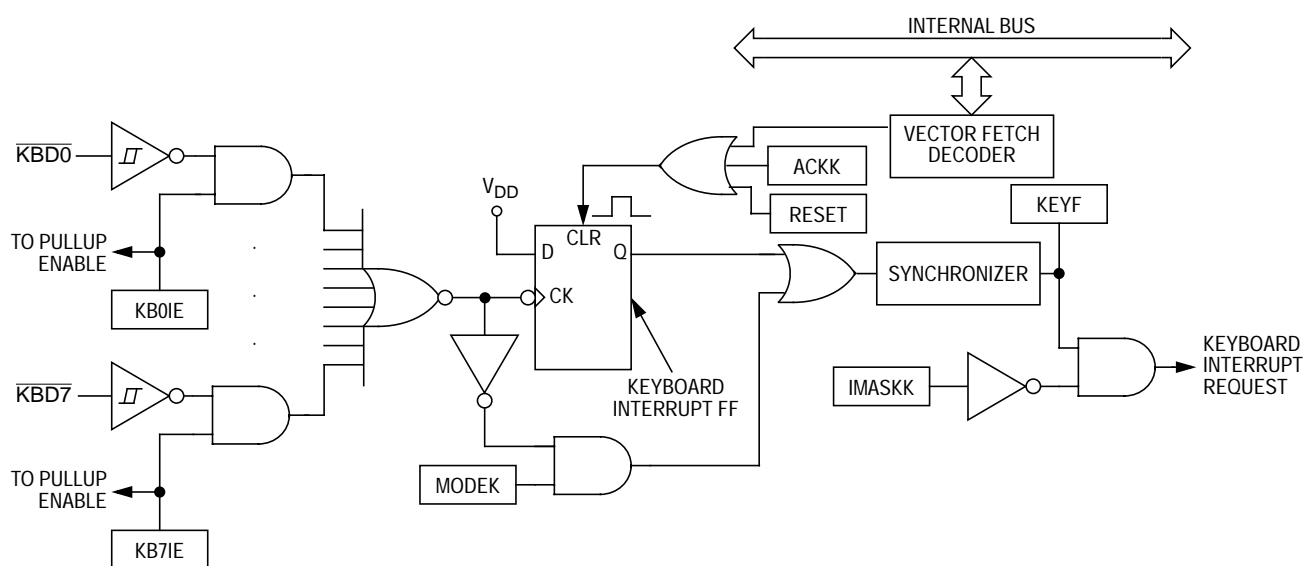


Figure 15-1. Keyboard Module Block Diagram

Addr.	Register Name		Bit 7	6	5	4	3	2	1	Bit 0
\$000D	Keyboard Status and Control Register (KBSCR) See page 159 .	Read:	0	0	0	0	KEYF	0	IMASKK	MODEK
		Write:						ACKK		
		Reset:	0	0	0	0	0	0	0	0
\$000E	Keyboard Interrupt Enable Register (KBIER) See page 160 .	Read:	KBIE7	KBIE6	KBIE5	KBIE4	KBIE3	KBIE2	KBIE1	KBIE0
		Write:								
		Reset:	0	0	0	0	0	0	0	0
			= Unimplemented							

Figure 15-2. Keyboard Module I/O Register Summary

15.4 Functional Description

Writing to the KBIE7–KBIE0 bits in the keyboard interrupt enable register independently enables or disables each port B pin as a keyboard interrupt pin. Enabling a keyboard interrupt pin also enables its internal pullup device. A logic 0 applied to an enabled keyboard interrupt pin latches a keyboard interrupt request.

A keyboard interrupt is latched when one or more keyboard pins goes low after all were high. The MODEK bit in the keyboard status and control register controls the triggering mode of the keyboard interrupt.

- If the keyboard interrupt is edge-sensitive only, a falling edge on a keyboard pin does not latch an interrupt request if another keyboard pin is already low. To prevent losing an interrupt request on one pin because another pin is still low, software can disable the latter pin while it is low.
- If the keyboard interrupt is falling edge- and low level-sensitive, an interrupt request is present as long as any keyboard pin is low.

If the MODEK bit is set, the keyboard interrupt pins are both falling edge- and low level-sensitive, and both of the following actions must occur to clear a keyboard interrupt request:

- Vector fetch or software clear — A vector fetch generates an interrupt acknowledge signal to clear the interrupt request. Software may generate the interrupt acknowledge signal by writing a logic 1 to the ACKK bit in the keyboard status and control register (KBSCR). The ACKK bit is useful in applications that poll the keyboard interrupt pins and require software to clear the keyboard interrupt request. Writing to the ACKK bit prior to leaving an interrupt service routine can also prevent spurious interrupts due to noise. Setting ACKK does not affect subsequent transitions on the keyboard interrupt pins. A falling edge that occurs after writing to the ACKK bit latches another interrupt request. If the keyboard interrupt mask bit, IMASKK, is clear, the CPU loads the program counter with the vector address at locations \$FFF4 and \$FFF5.

- Return of all enabled keyboard interrupt pins to logic 1 — As long as any enabled keyboard interrupt pin is at logic 0, the keyboard interrupt remains set.

The vector fetch or software clear and the return of all enabled keyboard interrupt pins to logic 1 may occur in any order.

If the MODEK bit is clear, the keyboard interrupt pin is falling-edge-sensitive only. With MODEK clear, a vector fetch or software clear immediately clears the keyboard interrupt request.

Reset clears the keyboard interrupt request and the MODEK bit, clearing the interrupt request even if a keyboard interrupt pin stays at logic 0.

The keyboard flag bit (KEYF) in the keyboard status and control register can be used to see if a pending interrupt exists. The KEYF bit is not affected by the keyboard interrupt mask bit (IMASKK) which makes it useful in applications where polling is preferred.

To determine the logic level on a keyboard interrupt pin, use the data direction register to configure the pin as an input and read the data register.

NOTE: *Setting a keyboard interrupt enable bit (KBIE_x) forces the corresponding keyboard interrupt pin to be an input, overriding the data direction register. However, the data direction register bit must be a logic 0 for software to read the pin.*

15.5 Keyboard Initialization

When a keyboard interrupt pin is enabled, the pin may initially be low and cause a false interrupt to occur. A false interrupt on an edge-triggered pin can be acknowledged immediately after enabling the pin. A false interrupt on an edge- and level-triggered interrupt pin must be acknowledged after the pin has been pulled high.

The internal pullup device, the pin capacitance, as well as the external load will factor into the actual amount of time it takes for the pin to pull high. Considering only an internal pullup of 48 k Ω and pin capacitance of 8 pF, the pullup time will be on the order of 1 μ s.

To prevent a false interrupt on keyboard initialization:

1. Mask keyboard interrupts by setting the IMASKK bit in the keyboard status and control register.
2. Enable the KBI pins by setting the appropriate KBIE_x bits in the keyboard interrupt enable register.
3. Write to the ACKK bit in the keyboard status and control register to clear any false interrupts.
4. Clear the IMASKK bit.

Another way to avoid a false interrupt:

1. Configure the keyboard pins as outputs by setting the appropriate DDRB bits in data direction register B.
2. Write logic 1s to the appropriate port B data register bits.
3. Enable the KBI pins by setting the appropriate KBIE_x bits in the keyboard interrupt enable register.

15.6 Low-Power Modes

The WAIT and STOP instructions put the MCU in low power-consumption standby modes.

15.6.1 Wait Mode

The keyboard module remains active in wait mode. Clearing the IMASKK bit in the keyboard status and control register enables keyboard interrupt requests to bring the MCU out of wait mode.

15.6.2 Stop Mode

The keyboard module remains active in stop mode. Clearing the IMASKK bit in the keyboard status and control register enables keyboard interrupt requests to bring the MCU out of stop mode.

15.7 Keyboard Module During Break Interrupts

The system integration module (SIM) controls whether the keyboard interrupt latch can be cleared during the break state. The BCFE bit in the break flag control register (BFCR) enables software to clear status bits during the break state.

To allow software to clear the keyboard interrupt latch during a break interrupt, write a logic 1 to the BCFE bit. If a latch is cleared during the break state, it remains cleared when the MCU exits the break state.

To protect the latch during the break state, write a logic 0 to the BCFE bit. With BCFE at logic 0 (its default state), writing to the keyboard acknowledge bit (ACKK) in the keyboard status and control register during the break state has no effect. See [15.8.1 Keyboard Status and Control Register](#).

15.8 I/O Registers

Two input/output registers control and monitor operation of the keyboard module:

- Keyboard status and control register (KBSCR)
- Keyboard interrupt enable register (KBIER)

15.8.1 Keyboard Status and Control Register

The keyboard status and control register (KBSCR):

- Flags keyboard interrupt requests
- Acknowledges keyboard interrupt requests
- Masks keyboard interrupt requests
- Controls keyboard interrupt triggering sensitivity

Address: \$000D

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	0	0	0	0	KEYF	0	IMASKK	MODEK
Write:						ACKK		
Reset:	0	0	0	0	0	0	0	0


 = Unimplemented

Figure 15-3. Keyboard Status and Control Register (KBSCR)

Bits 7–4 — Not used

These read-only bits always read as logic 0s.

KEYF — Keyboard Flag

This read-only bit is set when a keyboard interrupt is pending. Reset clears the KEYF bit.

1 = Keyboard interrupt pending

0 = No keyboard interrupt pending

ACKK — Keyboard Acknowledge Bit

Writing a logic 1 to this write-only bit clears the keyboard interrupt request. ACKK always reads as logic 0. Reset clears ACKK.

IMASKK — Keyboard Interrupt Mask Bit

Writing a logic 1 to this read/write bit prevents the output of the keyboard interrupt mask from generating interrupt requests. Reset clears the IMASKK bit.

1 = Keyboard interrupt requests masked

0 = Keyboard interrupt requests not masked

MODEK — Keyboard Triggering Sensitivity Bit

This read/write bit controls the triggering sensitivity of the keyboard interrupt pins. Reset clears MODEK.

1 = Keyboard interrupt requests on falling edges and low levels

0 = Keyboard interrupt requests on falling edges only

15.8.2 Keyboard Interrupt Enable Register

The keyboard interrupt enable register (KBIER) enables or disables each port B pin to operate as a keyboard interrupt pin.

Address: \$000E

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	KBIE7	KBIE6	KBIE5	KBIE4	KBIE3	KBIE2	KBIE1	KBIE0
Write:								
Reset:	0	0	0	0	0	0	0	0

Figure 15-4. Keyboard Interrupt Enable Register (KBIER)

KBIE7–KBIE0 — Keyboard Interrupt Enable Bits

Each of these read/write bits enables the corresponding keyboard interrupt pin to latch interrupt requests. Reset clears the keyboard interrupt enable register.

1 = PTBx pin enabled as keyboard interrupt pin

0 = PTBx pin not enabled as keyboard interrupt pin

Section 16. Computer Operating Properly (COP)

16.1 Contents

16.2	Introduction	162
16.3	Functional Description	162
16.4	I/O Signals	163
16.4.1	CGMXCLK	163
16.4.2	STOP Instruction	163
16.4.3	COPCTL Write	163
16.4.4	Power-On Reset	164
16.4.5	Internal Reset	164
16.4.6	Reset Vector Fetch	164
16.4.7	COPD (COP Disable)	164
16.4.8	COPRS (COP Rate Select)	164
16.5	COP Control Register	164
16.6	Interrupts	165
16.7	Monitor Mode	165
16.8	Low-Power Modes	165
16.8.1	Wait Mode	165
16.8.2	Stop Mode	165
16.9	COP Module During Break Mode	166

16.2 Introduction

This computer operating properly (COP) module contains a free-running counter that generates a reset if allowed to overflow. The COP module helps software recover from runaway code. Clearing the COP counter periodically prevents a reset.

16.3 Functional Description

Figure 16-1 shows the structure of the COP module.

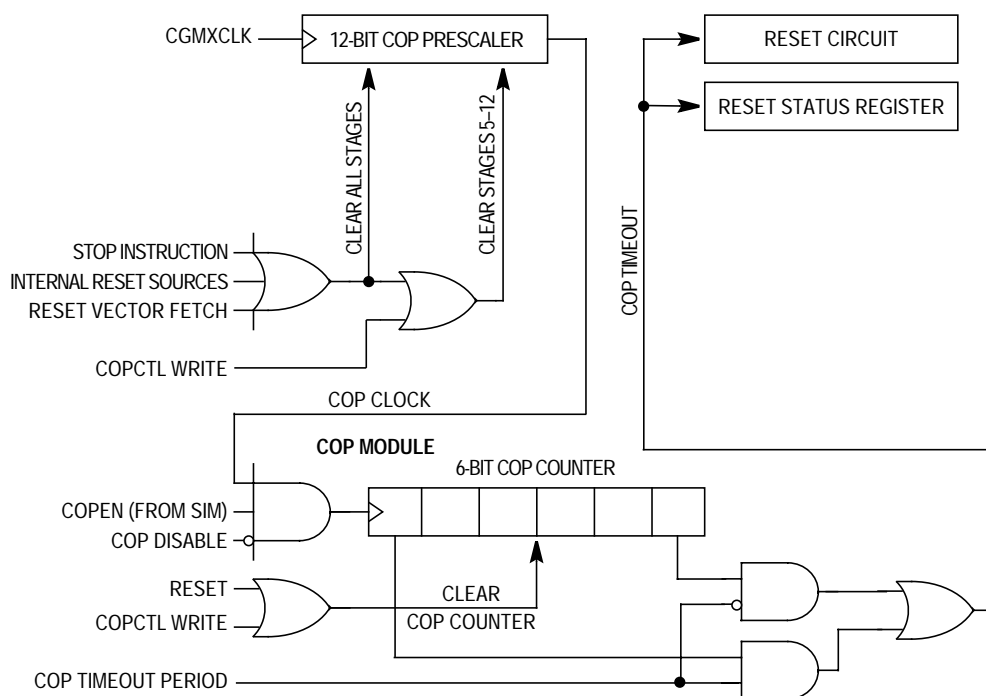


Figure 16-1. COP Block Diagram

The COP counter is a free-running 6-bit counter preceded by a 12-bit prescaler counter. If not cleared by software, the COP counter overflows and generates an asynchronous reset after $2^{18} - 2^4$ or $2^{13} - 2^4$ CGMXCLK cycles, depending on the state of the COP rate select bit COPRS, in the configuration register (CONFIG). With a $2^{18} - 2^4$ CGMXCLK cycle overflow option, a 4.9152-MHz crystal gives a COP timeout period is 53.3 ms. Writing any value to location \$FFFF before an

overflow occurs prevents a COP reset by clearing the COP counter and stages 12 through 5 of the prescaler.

NOTE: *Service the COP immediately after reset and before entering or after exiting stop mode to guarantee the maximum time before the first COP counter overflow.*

A COP reset pulls the $\overline{\text{RST}}$ pin low for 32 CGMXCLK cycles and sets the COP bit in the reset status register (RSR).

In monitor mode, the COP is disabled if the $\overline{\text{RST}}$ pin or the $\overline{\text{IRQ1}}$ is held at V_{TST} . During the break state, V_{TST} on the $\overline{\text{RST}}$ pin disables the COP.

NOTE: *Place COP clearing instructions in the main program and not in an interrupt subroutine. Such an interrupt subroutine could keep the COP from generating a reset even while the main program is not working properly.*

16.4 I/O Signals

This section describes the signals shown in [Figure 16-1](#).

16.4.1 CGMXCLK

CGMXCLK is the crystal oscillator output signal. CGMXCLK frequency is equal to the crystal frequency.

16.4.2 STOP Instruction

The STOP instruction clears the COP prescaler.

16.4.3 COPCTL Write

Writing any value to the COP control register (COPCTL) (see [16.5 COP Control Register](#)) clears the COP counter and clears bits 12–5 of the prescaler. Reading the COP control register returns the low byte of the reset vector.

16.4.4 Power-On Reset

The power-on reset (POR) circuit clears the COP prescaler 4096 CGMXCLK cycles after power-up.

16.4.5 Internal Reset

An internal reset clears the COP prescaler and the COP counter.

16.4.6 Reset Vector Fetch

A reset vector fetch occurs when the vector address appears on the data bus. A reset vector fetch clears the COP prescaler.

16.4.7 COPD (COP Disable)

The COPD signal reflects the state of the COP disable bit (COPD) in the configuration register (CONFIG).

16.4.8 COPRS (COP Rate Select)

The COPRS signal reflects the state of the COP rate select bit (COPRS) in the configuration register.

16.5 COP Control Register

The COP control register is located at address \$FFFF and overlaps the reset vector. Writing any value to \$FFFF clears the COP counter and starts a new timeout period. Reading location \$FFFF returns the low byte of the reset vector. See [Figure 16-2](#).

Address:	\$FFFF							
	Bit 7	6	5	4	3	2	1	Bit 0
Read:	Low byte of reset vector							
Write:	Writing clears COP counter (any value)							
Reset:	Unaffected by reset							

Figure 16-2. COP Control Register (COPCTL)

16.6 Interrupts

The COP does not generate central processor unit (CPU) interrupt requests.

16.7 Monitor Mode

The COP is disabled in monitor mode when V_{TST} is present on the $\overline{IRQ1}$ pin or on the \overline{RST} pin.

16.8 Low-Power Modes

The WAIT and STOP instructions put the MCU in low power-consumption standby modes.

16.8.1 Wait Mode

The COP remains active during wait mode. To prevent a COP reset during wait mode, periodically clear the COP counter in a CPU interrupt routine.

16.8.2 Stop Mode

Stop mode turns off the CGMXCLK input to the COP and clears the COP prescaler. Service the COP immediately before entering or after exiting stop mode to ensure a full COP timeout period after entering or exiting stop mode.

The STOP bit in the CONFIG register enables the STOP instruction. To prevent inadvertently turning off the COP with a STOP instruction, disable the STOP instruction by clearing the STOP bit.

16.9 COP Module During Break Mode

The COP is disabled during a break interrupt when V_{TST} is present on the \overline{RST} pin.

Section 17. Monitor ROM (MON)

17.1 Contents

17.2	Introduction	167
17.3	Features	168
17.4	Functional Description	168
17.4.1	Entering Monitor Mode	170
17.4.2	Data Format	171
17.4.3	Break Signal	172
17.4.4	Baud Rate	172
17.4.5	Commands	173
17.5	Security	177

17.2 Introduction

This section describes the monitor read-only memory (MON). The monitor ROM allows complete testing of the MCU through a single-wire interface with a host computer.

17.3 Features

Features of the monitor ROM include:

- Normal user-mode pin functionality
- One pin dedicated to serial communication between monitor ROM and host computer
- Standard mark/space non-return-to-zero (NRZ) communication with host computer
- Execution of code in random-access memory (RAM) or ROM
- ROM memory security⁽¹⁾

17.4 Functional Description

The monitor ROM receives and executes commands from a host computer. **Figure 17-1** shows an example circuit used to enter monitor mode and communicate with a host computer via a standard RS-232 interface.

Simple monitor commands can access any memory address. In monitor mode, the MCU can execute host-computer code in RAM while all MCU pins retain normal operating mode functions. All communication between the host computer and the MCU is through the PTA0 pin. A level-shifting and multiplexing interface is required between PTA0 and the host computer. PTA0 is used in a wired-OR configuration and requires a pullup resistor.

1. No security feature is absolutely secure. However, Motorola's strategy is to make reading or copying the ROM difficult for unauthorized users.

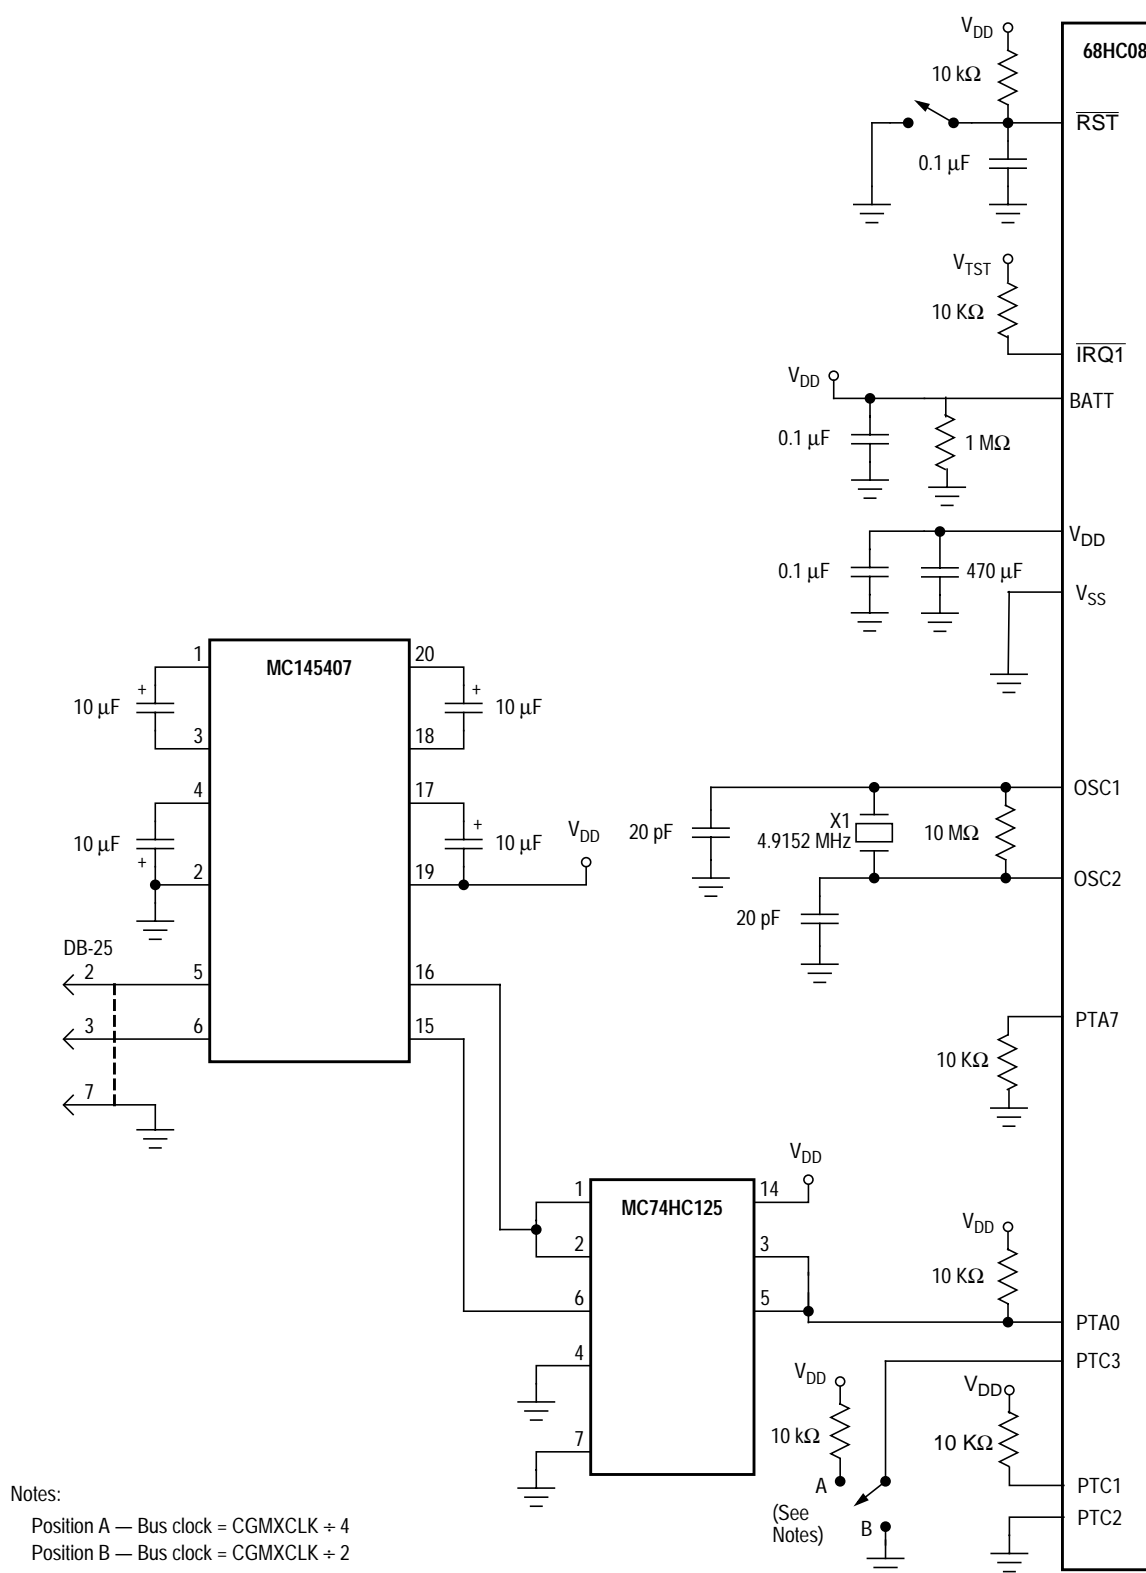


Figure 17-1. Monitor Mode Circuit

17.4.1 Entering Monitor Mode

Table 17-1 shows the pin conditions for entering monitor mode.

Table 17-1. Monitor Mode Entry

IRQ1 Pin	PTA7 Pin	PTC1 Pin	PTC2 Pin	PTA0 Pin	PTC3 Pin	CGMOUT	Bus Frequency
V_{TST}	0	1	0	1	1	$\frac{CGMXCLK}{2}$	$\frac{CGMOUT}{2}$
					0	CGMXCLK	

If PTC3 is low upon monitor mode entry, CGMOUT is equal to the crystal frequency. The bus frequency in this case is a divide-by-two of the input clock. If PTC3 is high upon monitor mode entry, the bus frequency will be a divide-by-four of the input clock.

NOTE: Holding the PTC3 pin low when entering monitor mode causes a bypass of a divide-by-two stage at the oscillator. The CGMOUT frequency is equal to the CGMXCLK frequency, and the OSC1 input directly generates internal bus clocks. In this case, the OSC1 signal must have a 50 percent duty cycle at maximum bus frequency.

Enter monitor mode with the pin configuration shown above by pulling \overline{RST} low and then high. The rising edge of \overline{RST} latches monitor mode. Once monitor mode is latched, the values on the specified pins can change.

NOTE: The PTA7 pin must remain at logic 0 for 24 bus cycles after the \overline{RST} pin goes high.

Once out of reset, the MCU waits for the host to send eight security bytes. (See [17.5 Security](#).) After the security bytes, the MCU sends a break signal (10 consecutive logic 0s) to the host, indicating that it is ready to receive a command.

In monitor mode, the MCU uses different vectors for reset, software interrupt (SWI), and break interrupt than those for user mode. The alternate vectors are in the \$FE page instead of the \$FF page and allow code execution from the internal monitor firmware instead of user code.

The COP module is disabled in monitor mode as long as V_{TST} is applied to either the \overline{IRQ} pin or the \overline{RST} pin.

Table 17-2 summarizes the differences between user mode and monitor mode.

Table 17-2. Mode Differences

Modes	Functions						
	COP	Reset Vector High	Reset Vector Low	Break Vector High	Break Vector Low	SWI Vector High	SWI Vector Low
User	Enabled	\$FFFE	\$FFFF	\$FFFC	\$FFFD	\$FFFC	\$FFFD
Monitor	Disabled ⁽¹⁾	\$FEFE	\$FEFF	\$FEFC	\$FEFD	\$FEFC	\$FEFD

1. If the high voltage (V_{TST}) is removed from the \overline{IRQ} pin or the \overline{RST} pin, the SIM asserts its COP enable output. The COP is a configuration option enabled or disabled by the COPD bit in the configuration register.

17.4.2 Data Format

Communication with the monitor ROM is in standard non-return-to-zero (NRZ) mark/space data format. Transmit and receive baud rates must be identical.




Figure 17-2. Monitor Data Format

17.4.3 Break Signal

A start bit (logic 0) followed by nine logic 0 bits is a break signal. When the monitor receives a break signal, it drives the PTA0 pin high for the duration of two bits and then echoes back the break signal.

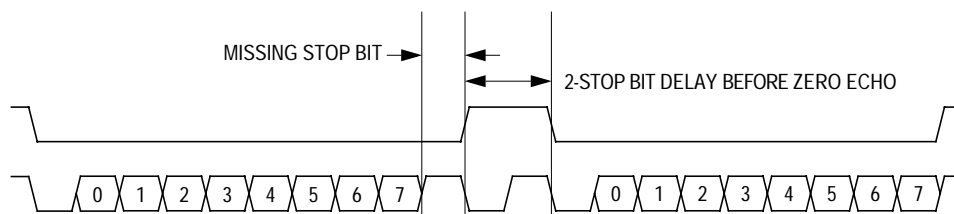


Figure 17-3. Break Transaction

17.4.4 Baud Rate

The communication baud rate is controlled by the crystal frequency and the state of the PTC3 pin upon entry into monitor mode. When PTC3 is high, the divide by ratio is 1024. If the PTC3 pin is at logic 0 upon entry into monitor mode, the divide by ratio is 512. [Table 17-3](#) lists crystal frequencies required to achieve standard baud rates. Other standard baud rates can be accomplished using higher crystal frequencies.

Table 17-3. Monitor Baud Rate Selection

Crystal Frequency (MHz)	PTC3 Pin	Baud Rate
4.9152	0	9600
4.9152	1	4800

17.4.5 Commands

The monitor ROM firmware uses these commands:

- READ (read memory)
- WRITE (write memory)
- IREAD (indexed read)
- IWRITE (indexed write)
- READSP (read stack pointer)
- RUN (run user program)

The monitor ROM firmware echoes each received byte back to the PTA0 pin for error checking. An 11-bit delay at the end of each command allows the host to send a break character to cancel the command. A delay of two bit times occurs before each echo and before READ, IREAD, or READSP data is returned. The data returned by a read command appears after the echo of the last byte of the command.

NOTE: Wait one bit time after each echo before sending the next byte.

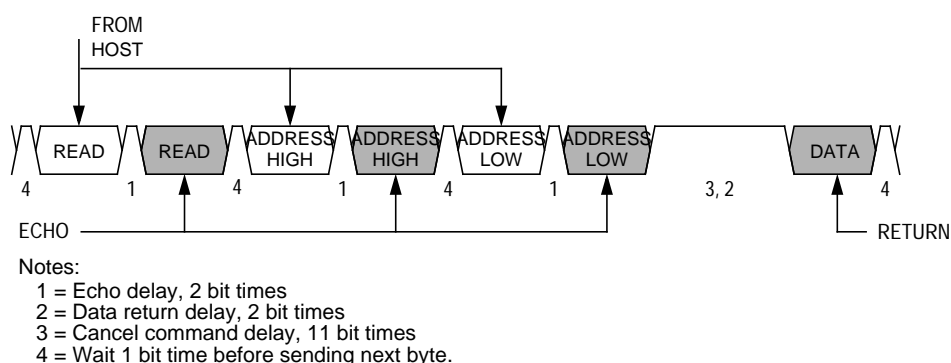


Figure 17-4. Read Transaction

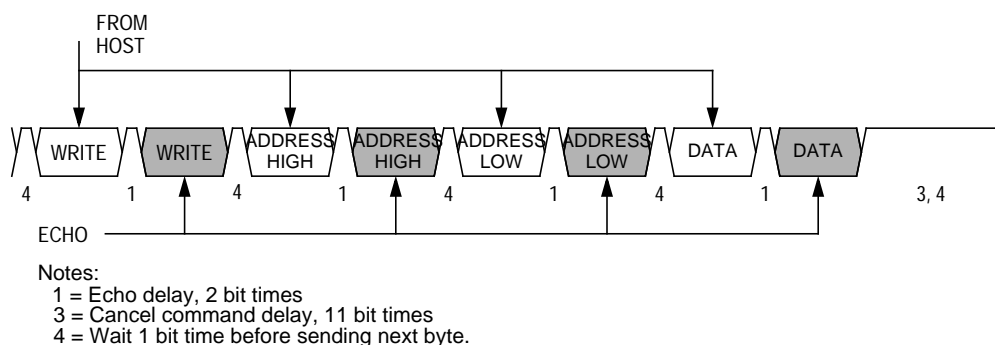


Figure 17-5. Write Transaction

Refer to [Table 17-4](#), [Table 17-5](#), [Table 17-6](#), [Table 17-7](#), [Table 17-8](#), and [Table 17-9](#) for brief descriptions of each monitor mode command.

Table 17-4. READ (Read Memory) Command

Description	Read byte from memory
Operand	2-byte address in high byte:low byte order
Data Returned	Returns contents of specified address
Opcode	\$4A
<p style="text-align: center;">Command Sequence</p> <pre> graph LR SENT[SENT TO MONITOR] --> READ[READ] READ --> ADDR_H[ADDRESS HIGH] ADDR_H --> ADDR_L[ADDRESS LOW] ADDR_L --> DATA[DATA] ECHO[ECHO] --> READ ECHO --> ADDR_H ECHO --> ADDR_L RETURN[RETURN] --> DATA </pre>	

Table 17-5. WRITE (Write Memory) Command

Description	Write byte to memory
Operand	2-byte address in high byte:low byte order; low byte followed by data byte
Data Returned	None
Opcode	\$49
<p style="text-align: center;">Command Sequence</p> <pre> graph LR HOST[FROM HOST] --> WRITE[WRITE] WRITE --> ADDR_H[ADDRESS HIGH] ADDR_H --> ADDR_L[ADDRESS LOW] ADDR_L --> DATA[DATA] ECHO[ECHO] --> WRITE ECHO --> ADDR_H ECHO --> ADDR_L </pre>	

Table 17-6. IREAD (Indexed Read) Command

Description	Read next 2 bytes in memory from last address accessed
Operand	2-byte address in high byte:low byte order
Data Returned	Returns contents of next two addresses
Opcode	\$1A
<p style="text-align: center;">Command Sequence</p>	

Table 17-7. IWRITE (Indexed Write) Command

Description	Write to last address accessed + 1
Operand	Single data byte
Data Returned	None
Opcode	\$19
<p style="text-align: center;">Command Sequence</p>	

NOTE: A sequence of IREAD or IWRITE commands can access a block of memory sequentially over the full 64-Kbyte memory map.

Table 17-8. READSP (Read Stack Pointer) Command

Description	Reads stack pointer
Operand	None
Data Returned	Returns incremented stack pointer value (SP + 1) in high byte:low byte order
Opcode	\$0C
<p style="text-align: center;">Command Sequence</p>	

Table 17-9. RUN (Run User Program) Command

Description	Executes PULH and RTI instructions
Operand	None
Data Returned	None
Opcode	\$28
<p style="text-align: center;">Command Sequence</p>	

The MCU executes the SWI and PSHH instructions when it enters monitor mode. The RUN command tells the MCU to execute the PULH and RTI instructions. Before sending the RUN command, the host can modify the stacked CPU registers to prepare to run the host program. The READSP command returns the incremented stack pointer value, SP + 1. The high and low bytes of the program counter are at addresses SP + 5 and SP + 6.

	SP
HIGH BYTE OF INDEX REGISTER	SP + 1
CONDITION CODE REGISTER	SP + 2
ACCUMULATOR	SP + 3
LOW BYTE OF INDEX REGISTER	SP + 4
HIGH BYTE OF PROGRAM COUNTER	SP + 5
LOW BYTE OF PROGRAM COUNTER	SP + 6
	SP + 7

Figure 17-6. Stack Pointer at Monitor Mode Entry

17.5 Security

A security feature discourages unauthorized reading of ROM locations while in monitor mode. The host can bypass the security feature at monitor mode entry by sending eight security bytes that match the bytes at locations \$FFF6–\$FFFD. Locations \$FFF6–\$FFFD contain user-defined data.

NOTE: *Do not leave locations \$FFF6–\$FFFD blank. For security reasons, program locations \$FFF6–\$FFFD even if they are not used for vectors.*

During monitor mode entry, the MCU waits after the power-on reset for the host to send the eight security bytes on pin PA0.

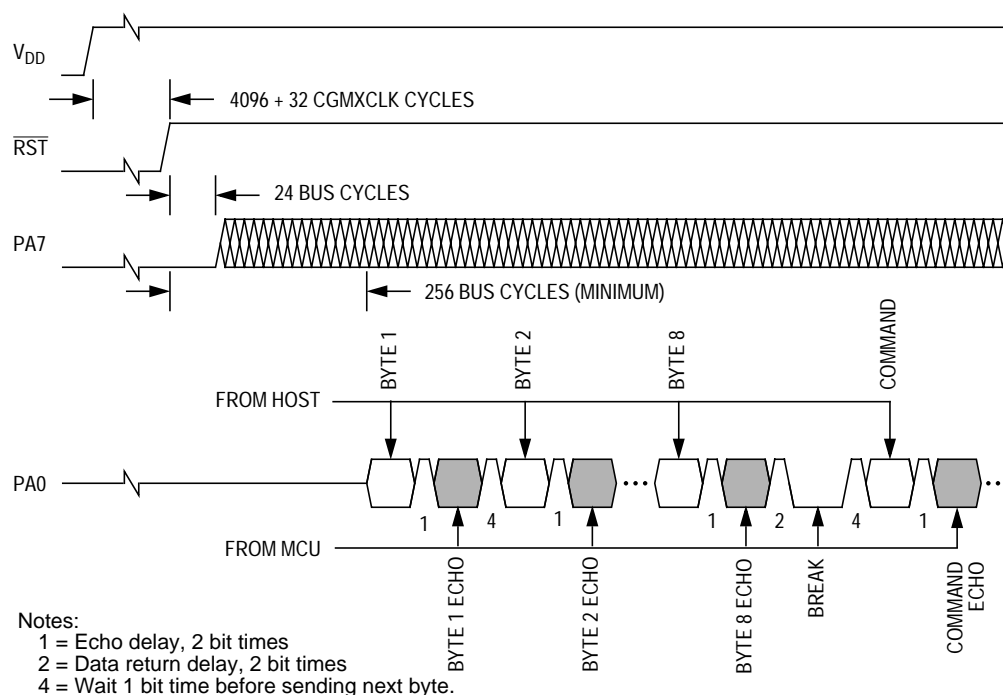


Figure 17-7. Monitor Mode Entry Timing

If the received bytes match those at locations \$FFF6–\$FFFD, the host bypasses the security feature and can read all ROM locations and execute code from ROM. Security remains bypassed until a power-on reset occurs. After the host bypasses security, any reset other than a power-on reset requires the host to send another eight bytes. If the reset was not a power-on reset, security remains bypassed regardless of the data that the host sends.

If the received bytes do not match the data at locations \$FFF6–\$FFFD, the host fails to bypass the security feature. The MCU remains in monitor mode, but reading ROM locations returns undefined data, and trying to execute code from ROM causes an illegal address reset. After the host fails to bypass security, any reset other than a power-on reset causes an endless loop of illegal address resets.

After receiving the eight security bytes from the host, the MCU transmits a break character signalling that it is ready to receive a command.

NOTE: *The MCU does not transmit a break character until after the host sends the eight security bytes.*

Section 18. Break Module (BRK)

18.1 Contents

18.2	Introduction	179
18.3	Features	180
18.4	Functional Description	180
18.4.1	Flag Protection During Break Interrupts	182
18.4.2	CPU During Break Interrupts	182
18.4.3	TIM0I During Break Interrupts	182
18.4.4	COP During Break Interrupts	182
18.5	Low-Power Modes	182
18.5.1	Wait Mode	182
18.5.2	Stop Mode	183
18.6	Break Module Registers	183
18.6.1	Break Status and Control Register	183
18.6.2	Break Address Registers	184
18.6.3	Break Status Register	185
18.6.4	Break Flag Control Register	186

18.2 Introduction

This section describes the break module (BRK). The break module can generate a break interrupt that stops normal program flow at a defined address to enter a background program.

18.3 Features

Features of the break module include:

- Accessible input/output (I/O) registers during the break interrupt
- Central processor unit (CPU) generated break interrupts
- Software-generated break interrupts
- Computer operating properly (COP) disabling during break interrupts

18.4 Functional Description

When the internal address bus matches the value written in the break address registers, the break module issues a breakpoint signal to the CPU. The CPU then loads the instruction register with a software interrupt instruction (SWI) after completion of the current CPU instruction. The program counter vectors to \$FFFC and \$FFFD (\$FEFC and \$FEFD in monitor mode).

These events can cause a break interrupt to occur:

- A CPU-generated address (the address in the program counter) matches the contents of the break address registers.
- Software writes a logic 1 to the BRKA bit in the break status and control register.

When a CPU-generated address matches the contents of the break address registers, the break interrupt begins after the CPU completes its current instruction. A return-from-interrupt instruction (RTI) in the break routine ends the break interrupt and returns the MCU to normal operation. [Figure 18-1](#) shows the structure of the break module.

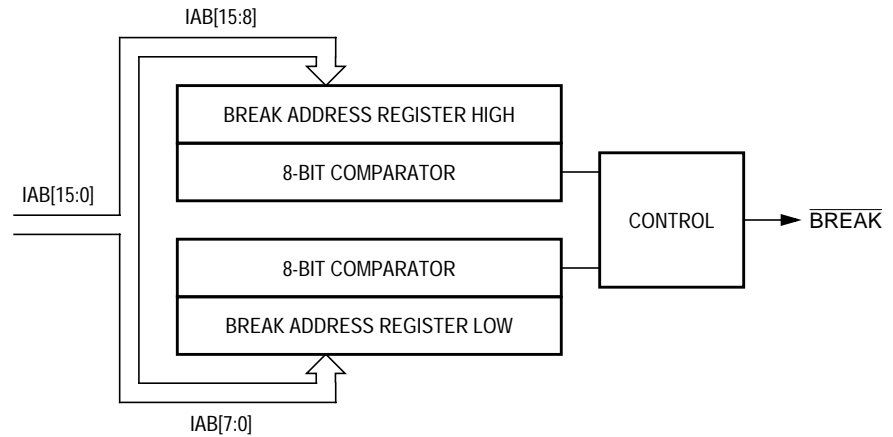


Figure 18-1. Break Module Block Diagram

Addr.	Register Name		Bit 7	6	5	4	3	2	1	Bit 0
\$FE00	Break Status Register (BSR) See page 185 .	Read:	0	0	0	1	0	0	BW	0
		Write:	R	R	R	R	R	R	Note	R
		Reset:	0	0	0	1	0	0	0	0
\$FE03	Break Flag Control Register (BFCR) See page 186 .	Read:	BCFE	R	R	R	R	R	R	R
		Write:								
		Reset:	0							
\$FE0C	Break Address Register High (BRKH) See page 184 .	Read:	Bit 15	14	13	12	11	10	9	Bit 8
		Write:								
		Reset:	0	0	0	0	0	0	0	0
\$FE0D	Break Address Register Low (BRKL) See page 184 .	Read:	Bit 7	6	5	4	3	2	1	Bit 0
		Write:								
		Reset:	0	0	0	0	0	0	0	0
\$FE0E	Break Status and Control Register (BSCR) See page 183 .	Read:	BRKE	BRKA	0	0	0	0	0	0
		Write:								
		Reset:	0	0	0	0	0	0	0	0

Note: Writing a logic 0 clears BW.

 = Unimplemented R = Reserved

Figure 18-2. Break Module Register Summary

18.4.1 Flag Protection During Break Interrupts

The BCFE bit in the break flag control register (BFCR) enables software to clear status bits during the break state.

18.4.2 CPU During Break Interrupts

The CPU starts a break interrupt by:

- Loading the instruction register with the SWI instruction
- Loading the program counter with \$FFFC and \$FFFD (\$FEFC and \$FEFD in monitor mode)

The break interrupt begins after completion of the CPU instruction in progress. If the break address register match occurs on the last cycle of a CPU instruction, the break interrupt begins immediately.

18.4.3 TIM0I During Break Interrupts

A break interrupt stops the timer counter.

18.4.4 COP During Break Interrupts

The COP is disabled during a break interrupt when V_{TST} is present on the \overline{RST} pin.

18.5 Low-Power Modes

The WAIT and STOP instructions put the MCU in low power-consumption standby modes.

18.5.1 Wait Mode

If enabled, the break module is active in wait mode. In the break routine, the user can subtract one from the return address on the stack if SBSW is set. See [Section 7. Low-Power Modes](#). Clear the BW bit by writing logic 0 to it.

18.5.2 Stop Mode

A break interrupt causes exit from stop mode and sets the SBSW bit in the break status register.

18.6 Break Module Registers

These registers control and monitor operation of the break module:

- Break status and control register (BSCR)
- Break address register high (BRKH)
- Break address register low (BRKL)
- Break status register (BSR)
- Break flag control register (BFCR)

18.6.1 Break Status and Control Register

The break status and control register (BSCR) contains break module enable and status bits.

Address: \$FE0E

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	BRKE	BRKA	0	0	0	0	0	0
Write:								
Reset:	0	0	0	0	0	0	0	0


 = Unimplemented

Figure 18-3. Break Status and Control Register (BSCR)

BRKE — Break Enable Bit

This read/write bit enables breaks on break address register matches. Clear BRKE by writing a logic 0 to bit 7. Reset clears the BRKE bit.

1 = Breaks enabled on 16-bit address match

0 = Breaks disabled on 16-bit address match

BRKA — Break Active Bit

This read/write status and control bit is set when a break address match occurs. Writing a logic 1 to BRKA generates a break interrupt. Clear BRKA by writing a logic 0 to it before exiting the break routine. Reset clears the BRKA bit.

- 1 = When read, break address match
- 0 = When read, no break address match

18.6.2 Break Address Registers

The break address registers (BRKH and BRKL) contain the high and low bytes of the desired breakpoint address. Reset clears the break address registers.

Register Name and Address: BRKH—\$FE0C

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	Bit 15	14	13	12	11	10	9	Bit 8
Write:								
Reset:	0	0	0	0	0	0	0	0

Register Name and Address: BRKL—\$FE0D

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	Bit 7	6	5	4	3	2	1	Bit 0
Write:								
Reset:	0	0	0	0	0	0	0	0

Figure 18-4. Break Address Registers (BRKH and BRKL)

18.6.3 Break Status Register

The break status register (BSR) contains a flag to indicate that a break caused an exit from wait mode. The flag is useful in applications requiring a return to wait mode after exiting from a break interrupt.

Address: \$FE00

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	0	0	0	1	0	0	BW	0
Write:	R	R	R	R	R	R	Note	R
Reset:	0	0	0	1	0	0	0	0

R = Reserved
 Note: Writing a logic 0 clears BW.

Figure 18-5. Break Status Register (BSR)

BW — Break Wait Bit

This read/write bit is set when a break interrupt causes an exit from wait mode. Clear BW by writing a logic 0 to it. Reset clears BW.

1 = Break interrupt during wait mode

0 = No break interrupt during wait mode

BW can be read within the break interrupt routine. The user can modify the return address on the stack by subtracting 1 from it. The following code is an example.

This code works if the H register was stacked in the break interrupt routine. Execute this code at the end of the break interrupt routine.

```

HIBYTE EQU 5
LOBYTE EQU 6
;      If not BW, do RTI
      BRCLR BW,BSR, RETURN      ; See if wait mode or stop mode
                                   ; was exited by break.
      TST  LOBYTE,SP            ; If RETURNLO is not 0,
      BNE  DOLO                 ; then just decrement low byte.
      DEC  HIBYTE,SP            ; Else deal with high byte also.
DOLO   DEC  LOBYTE,SP            ; Point to WAIT/STOP opcode.
RETURNPULH                                ; Restore H register.
      RTI

```

18.6.4 Break Flag Control Register

The break flag control register (BFCR) contains a bit that enables software to clear status bits while the MCU is in a break state.

Address: \$FE03

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	BCFE	R	R	R	R	R	R	R
Write:								
Reset:	0							

R = Reserved

Figure 18-6. Break Flag Control Register (BFCR)

BCFE — Break Clear Flag Enable Bit

This read/write bit enables software to clear status bits by accessing status registers while the MCU is in a break state. To clear status bits during the break state, the BCFE bit must be set.

1 = Status bits clearable during break

0 = Status bits not clearable during break

Section 19. Electrical Specifications

19.1 Contents

19.2	Introduction	187
19.3	Absolute Maximum Ratings	188
19.4	Functional Operating Range	189
19.5	Thermal Characteristics	189
19.6	3.3-Volt DC Electrical Characteristics	190
19.7	2.0-Volt DC Electrical Characteristics	191
19.8	Control Timing	192
19.9	Oscillator Characteristics	192
19.10	LVI Characteristics	193
19.11	Battery Detection Characteristics	194
19.12	Battery Circuit Component Specifications	194

19.2 Introduction

This section contains electrical and timing specifications.

19.3 Absolute Maximum Ratings

Maximum ratings are the extreme limits to which the MCU can be exposed without permanently damaging it.

NOTE: *This device is not guaranteed to operate properly at the maximum ratings. Refer to [19.6 3.3-Volt DC Electrical Characteristics](#) and [19.7 2.0-Volt DC Electrical Characteristics](#) for guaranteed operating conditions.*

Characteristic ⁽¹⁾	Symbol	Value	Unit
Supply voltage	V_{DD}	−0.3 to +6.0	V
Input voltage	V_{In}	$V_{SS} - 0.3$ to $V_{DD} + 0.3$	V
Maximum current per pin excluding V_{DD} and V_{SS}	I	± 25	mA
Storage temperature	T_{STG}	−55 to +150	°C
Maximum current out of V_{SS}	I_{MVSS}	100	mA
Maximum current into V_{DD}	I_{MVDD}	100	mA

1. Voltages referenced to V_{SS} .

NOTE: *This device contains circuitry to protect the inputs against damage due to high static voltages or electric fields; however, it is advised that normal precautions be taken to avoid application of any voltage higher than maximum-rated voltages to this high-impedance circuit. For proper operation, it is recommended that V_{In} and V_{Out} be constrained to the range $V_{SS} \leq (V_{In} \text{ or } V_{Out}) \leq V_{DD}$. Reliability of operation is enhanced if unused inputs are connected to an appropriate logic voltage level (for example, either V_{SS} or V_{DD} .)*

19.4 Functional Operating Range

Characteristic	Symbol	Min	Max	Unit
Operating temperature range	T_A	0	70	°C
Operating voltage range ⁽¹⁾	V_{DD}	1.8	3.6	V
Battery input operating voltage range ⁽²⁾	BATT	2.1	3.6	V

- V_{DD} is the supply node for the MCU. V_{DD} is supplied from the BATT pin and is calculated as $V_{DD} = V_{BATT} - V_F$ where V_F is the forward voltage of the internal P-channel MOSFET. See [19.11 Battery Detection Characteristics](#).
- Minimum battery voltage is for guaranteed MCU operation. The MCU will operate lower when the LVI trip point (V_{LVR}) is less than maximum.

19.5 Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal resistance SOIC PDIP LQFP	θ_{JA}	60 60 124	°C/W
I/O pin power dissipation	$P_{I/O}$	User determined	W
Power dissipation ⁽¹⁾	P_D	$(I_{BATT} \times V_{BATT}) + P_{I/O}$	W
Average junction temperature	T_J	$T_A + (P_D \times \theta_{JA})$	°C
Maximum junction temperature	T_{JM}	125	°C

- Power dissipation is a function of temperature.

19.6 3.3-Volt DC Electrical Characteristics

Characteristic ⁽¹⁾	Symbol	Min	Typ ⁽²⁾	Max	Unit
Output high voltage ($I_{Load} = -2.5$ mA) port A, port B ($I_{Load} = -12$ mA) IRO ($I_{Load} = -3.0$ mA) port C	V_{OH} V_{OH} V_{OH}	$V_{DD} - 0.3$ $V_{DD} - 0.7$ $V_{DD} - 0.3$	— — —	— — —	V V V
Output low voltage ($I_{Load} = 4$ mA) port A, port B ($I_{Load} = 24$ mA) IRO ($I_{Load} = 14$ mA) port C	V_{OL} V_{OL} V_{OL}	— — —	— — —	0.3 0.8 0.3	V V V
Input high voltage All ports, $\overline{IRQ1}$, \overline{RST} , BATT, OSC1	V_{IH}	$0.7 \times V_{DD}$	—	V_{DD}	V
Input low voltage All ports, $\overline{IRQ1}$, \overline{RST} , BATT, OSC1	V_{IL}	V_{SS}	—	$0.3 \times V_{DD}$	V
V_{DD} supply current Run, $f_{OP} = 2.0$ MHz ⁽³⁾ Wait ⁽⁴⁾ Stop ⁽⁵⁾ 25°C 0°C to 70°C LP reset with battery out ⁽⁶⁾ 25°C 0°C to 70°C	I_{DD}	— — — — — —	3.0 1.25 1.0 1.0 0.25 0.25	3.0 1.5 1.0 1.0 0.25 0.25	mA mA μA μA μA mA
I/O ports hi-z leakage current	I_{IL}	—	—	± 4	μA
Input current	I_{In}	—	—	± 1	μA
Capacitance Ports (as input or output), \overline{RST} , $\overline{IRQ1}$, BATT	C_{Out} C_{In}	— —	— —	12 8	pF
Monitor mode entry voltage	V_{TST}	$V_{DD} + 2.5$	—	9	V
Pullup resistor PTB7/KBD7–PTB0/KBD0 25°C 0°C to 70°C	R_{PU}	27 24	— —	39 48	kΩ

- $V_{DD} = 3.3$ Vdc $\pm 10\%$, $V_{SS} = 0$ Vdc, $T_A = T_L$ to T_H , unless otherwise noted
- Typical values reflect average measurements at midpoint of voltage range, 25°C only.
- Run (operating) I_{DD} measured using external square wave clock source. LVI enabled. All inputs 0.2 V from rail. No dc loads. Less than 100 pF on all outputs. $C_L = 20$ pF on OSC2. All ports configured as inputs. OSC2 capacitance linearly affects run I_{DD} . Measured with all modules enabled.
- Wait I_{DD} measured using external square wave clock source ($f_{CGMXCLK} = 4$ MHz); all inputs 0.2 V from rail; no dc loads; less than 100 pF on all outputs. $C_L = 20$ pF on OSC2; OSC2 capacitance linearly affects wait I_{DD} .
- Stop I_{DD} measured with OSC1 grounded and no port pins sourcing current. LVI is disabled by stop entry.
- I_{DD} measurement when BATT supply is removed and part is in LP reset.

19.7 2.0-Volt DC Electrical Characteristics

Characteristic ⁽¹⁾	Symbol	Min	Typ ⁽²⁾	Max	Unit
Output high voltage ($I_{Load} = -1.2$ mA) port A, port B	V_{OH}	$V_{DD} - 0.3$	—	—	V
($I_{Load} = -6$ mA) IRO	V_{OH}	$V_{DD} - 0.7$	—	—	V
($I_{Load} = -1.2$ mA) port C	V_{OH}	$V_{DD} - 0.3$	—	—	V
Output low voltage ($I_{Load} = 2$ mA) port A, port B	V_{OL}	—	—	0.3	V
($I_{Load} = 11$ mA) IRO	V_{OL}	—	—	0.8	V
($I_{Load} = 7$ mA) port C	V_{OL}	—	—	0.3	V
Input high voltage All ports, $\overline{IRQ1}$, \overline{RST} , BATT, OSC1	V_{IH}	$0.7 \times V_{DD}$	—	V_{DD}	V
Input low voltage All ports, $\overline{IRQ1}$, \overline{RST} , BATT, OSC1	V_{IL}	V_{SS}	—	$0.3 \times V_{DD}$	V
V_{DD} supply current Run, $f_{OP} = 2.0$ MHz ⁽³⁾	I_{DD}	—	1.0	1.0	mA
Wait ⁽⁴⁾		—	0.5	0.6	mA
Stop ⁽⁵⁾ or LP reset with battery in ⁽⁶⁾		—	0.3	0.3	μ A
25°C		—	0.3	0.3	μ A
0°C to 70°C		—	0.1	0.1	μ A
LP reset with battery out ⁽⁷⁾		—	0.1	0.1	μ A
25°C		—	0.1	0.1	μ A
0°C to 70°C		—	0.1	0.1	μ A
I/O ports hi-z leakage current	I_{IL}	—	—	± 4	μ A
Input current	I_{In}	—	—	± 1	μ A
Capacitance Ports (as input or output), \overline{RST} , $\overline{IRQ1}$, BATT	C_{Out}	—	—	12	pF
	C_{In}	—	—	8	pF
Monitor mode entry voltage	V_{TST}	$V_{DD} + 2.5$	—	9	V
Pullup resistor PTB7/ $\overline{KBD7}$ –PTB0/ $\overline{KBD0}$	R_{PU}	27	—	39	k Ω
25°C		24	—	48	k Ω
0°C to 70°C					

1. $V_{DD} = 2.0$ Vdc $\pm 10\%$, $V_{SS} = 0$ Vdc, $T_A = T_L$ to T_H , unless otherwise noted

2. Typical values reflect average measurements at midpoint of voltage range, 25°C only.

3. Run (operating) I_{DD} measured using external square wave clock source. LVI enabled. All inputs 0.2 V from rail. No dc loads. Less than 100 pF on all outputs. $C_L = 20$ pF on OSC2. All ports configured as inputs. OSC2 capacitance linearly affects run I_{DD} . Measured with all modules enabled.

4. Wait I_{DD} measured using external square wave clock source ($f_{CGMXCLK} = 4$ MHz); all inputs 0.2 V from rail; no dc loads; less than 100 pF on all outputs. $C_L = 20$ pF on OSC2; OSC2 capacitance linearly affects wait I_{DD} .

5. Stop I_{DD} measured with OSC1 grounded and no port pins sourcing current. LVI is disabled by stop entry.

6. I_{DD} measurement when BATT supply is below V_{LVR} and part is in LP reset.

7. I_{DD} measurement when BATT supply is removed and part is in LP reset.

19.8 Control Timing

Characteristic ⁽¹⁾	Symbol	Min	Max	Unit
Internal operating frequency ⁽²⁾	f_{OP}	—	2.0	MHz
\overline{RST} input pulse width low ⁽³⁾	t_{IRL}	125	—	ns
$\overline{IRQ1}$ interrupt pulse width low ⁽⁴⁾ (edge-triggered)	t_{ILIH}	125	—	ns

1. $V_{DD} = 1.8$ to 5.5 Vdc; $V_{SS} = 0$ Vdc; timing shown with respect to 20% V_{DD} and 70% V_{DD} , unless otherwise noted
2. Some modules may require a minimum frequency greater than dc for proper operation; see appropriate table for this information.
3. Minimum pulse width reset is guaranteed to be recognized. It is possible for a smaller pulse width to cause a reset.
4. Minimum pulse width is for guaranteed interrupt. It is possible for a smaller pulse width to be recognized.

19.9 Oscillator Characteristics

Characteristic	Symbol	Min	Typ	Max	Unit
Crystal frequency ⁽¹⁾	$f_{CGMXCLK}^{(2)}$	1	—	8	MHz
External clock Reference frequency ^{(1) (3)}	$f_{CGMXCLK}^{(2)}$	dc	—	8	MHz
Crystal load capacitance ⁽⁴⁾	C_L	—	—	—	
Crystal fixed capacitance ⁽⁴⁾	C_1	—	$2 \times C_L$	—	
Crystal tuning capacitance ⁽⁴⁾	C_2	—	$2 \times C_L$	—	
Feedback bias resistor	R_B	—	10 M Ω	—	
Series resistor ^{(4) (5)}	R_S	—	—	—	

1. The CMT module is designed to function at $f_{CGMXCLK} = 8$ MHz. The values given here are oscillator specifications.
2. $f_{OP} = f_{CGMXCLK}/4$
3. No more than 10% duty cycle deviation from 50%
4. Consult crystal vendor data sheet
5. Not required for high frequency crystals

19.10 LVI Characteristics

Characteristic	Symbol	Min	Typ	Max	Unit
LVI low battery sense voltage ⁽¹⁾	V _{LVS}	1.90	1.95	2.0	V
LVI trip voltage	V _{LVR}	1.80	1.85	1.90	V
LVI Trip voltage hysteresis	H _{LVR}	40	60	100	mV
V _{DD} slew rate, rising	SR _R	—	—	0.05	V/μs
V _{DD} slew rate, falling	SR _F	—	—	0.10	V/μs
Response time R ≤ SR _{MAX}	t _{RESP}	—	—	$6.0 + \frac{40}{f_{\text{CGMXCLK}}}$	μs
Response time SR > SR _{MAX}	t _{RESP}	—	—	$\left(\frac{V_{\text{DD}} - V_{\text{LVR}}}{\text{SR}_{\text{max}}} - \frac{V_{\text{DD}} - V_{\text{LVR}}}{\text{SR}} \right) + 6.0 + \frac{40}{f_{\text{CGMXCLK}}}$	μs
LVI supply current @ V _{DD} = 5.5 V @ V _{DD} = 3.6 V @ V _{DD} = 1.8 V	I _{LVI}	— — —	— — —	100 50 25	mA μA μA
Enable time (enable to output transition)	t _{EN}	—	—	50	μs

1. The LVI samples V_{DD}. V_{LVR} and V_{LVS} are V_{DD} voltages.

19.11 Battery Detection Characteristics

Characteristic	Symbol	Min	Max	Unit
Battery insertion rearm voltage ⁽¹⁾	V_{BR}	—	100	mV
BATT to V_{DD} voltage @ BATT = 2.1 V	V_F	—	200	mV
BATT to V_{DD} voltage @ BATT = 3.3 V	V_F	—	300	mV
Supply rise time ramp rate ⁽²⁾	R_{POR}	0.035	—	V/ms

1. When supply is removed from the BATT pin, the pin voltage must fall below V_{BR} before supply is reapplied to guarantee that battery reinsertion is detected.
2. If minimum BATT pin voltage is not reached before the internal POR reset is released, \overline{RST} must be driven low externally until minimum BATT voltage is reached.

19.12 Battery Circuit Component Specifications

Characteristic	Symbol	Typ	Max	Unit
External V_{DD} supply capacitor ⁽¹⁾	C_{VBULK}	—	$470 \pm 20\%$	μF
External V_{DD} bypass capacitor ⁽²⁾	C_{VBYP}	$0.1 \pm 20\%$	—	μF
External BATT capacitor ²	C_{BATT}	$0.1 \pm 20\%$	—	μF
External BATT resistor	R_{BATT}	$1 \pm 5\%$	—	$M\Omega$

1. Capacitor is electrolytic, $\pm 20\%$, ESR < 4 Ω
2. Capacitor is ceramic, $\pm 20\%$

Section 20. Mechanical Specifications

20.1 Contents

20.2	Introduction	195
20.3	Available Packages	195
20.3.1	28-Pin Plastic Dual In-Line Package (Case 710)	196
20.3.2	28-Pin Small Outline Package (Case 751F)	196

20.2 Introduction

This section provides package information for the MC68HC08RC16.

20.3 Available Packages

This section shows the latest information at the time of this publication. To make sure that you have the latest package specifications, contact one of these sources:


- Local Motorola sales office
- Motorola Fax Back System (Mfax™)
 - Phone 1-602-244-6609
 - EMAIL RMFAX0@email.sps.mot.com;
<http://sps.motorola.com/mfax/>
- Worldwide Web (www) home page at
<http://www.mcu.motsps.com>

Follow Mfax or www on-line instructions to retrieve the current mechanical specifications.

Mfax is a trademark of Motorola, Inc.

Mechanical Specifications

20.3.1 28-Pin Plastic Dual In-Line Package (Case 710)

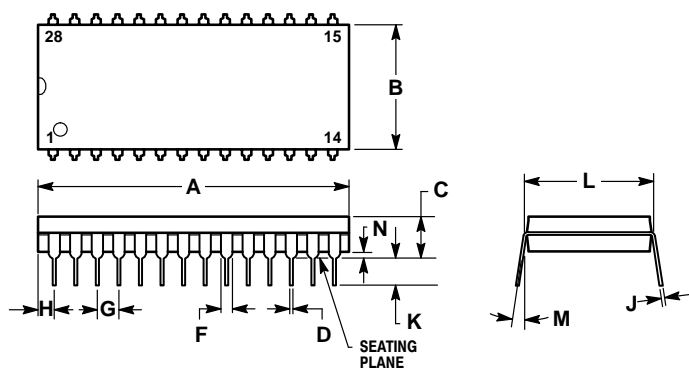


NOTES:

1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25mm (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	36.45	37.21	1.435	1.465
B	13.72	14.22	0.540	0.560
C	3.94	5.08	0.155	0.200
D	0.36	0.56	0.014	0.022
F	1.02	1.52	0.040	0.060
G	2.54 BSC		0.100 BSC	
H	1.65	2.16	0.065	0.085
J	0.20	0.38	0.008	0.015
K	2.92	3.43	0.115	0.135
L	15.24 BSC		0.600 BSC	
M	0°	15°	0°	15°
N	0.51	1.02	0.020	0.040

20.3.2 28-Pin Small Outline Package (Case 751F)

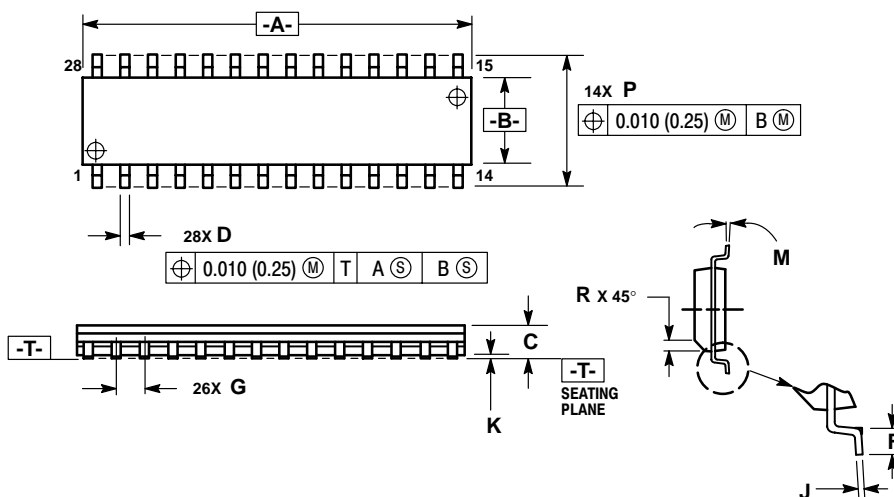

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	17.80	18.05	0.701	0.711
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.41	0.90	0.016	0.035
G	1.27 BSC		0.050 BSC	
J	0.23	0.32	0.009	0.013
K	0.13	0.29	0.005	0.011
M	0°	8°	0°	8°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029

Section 21. Ordering Information

21.1 Contents

21.2	Introduction.....	197
21.3	MC Order Numbers	197

21.2 Introduction

This section contains instructions for ordering the MC68HC08RC16.

Packages available are:


- 28-pin plastic dual in-line package (PDIP)
- 28-pin small outline package (SOIC)

21.3 MC Order Numbers

Table 21-1. MC Order Numbers

MC Order Number ⁽¹⁾	Operating Temperature Range
MC68HC08RC16P	–0°C to + 70°C
MC68HC08RC16DW	–0°C to + 70°C

1. P = Dual in-line plastic (PDIP)
DW = Small outline (SOIC)

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution, P.O. Box 5405, Denver, Colorado 80217, 1-800-441-2447 or 1-303-675-2140. Customer Focus Center, 1-800-521-6274

JAPAN: Motorola Japan Ltd.: SPD, Strategic Planning Office, 141, 4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan, 03-5487-8488

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd., Silicon Harbour Centre, 2 Dai King Street, Tai Po Industrial Estate, Tai Po, New Territories, Hong Kong, 852-26668334

Mfax™, Motorola Fax Back System: RMFAX0@email.sps.mot.com; <http://sps.motorola.com/mfax/>;
TOUCHTONE, 1-602-244-6609; US and Canada ONLY, 1-800-774-1848

HOME PAGE: <http://motorola.com/sps/>

Mfax is a trademark of Motorola, Inc.



MOTOROLA

© Motorola, Inc., 1999

MC68HC08RC16/D