

MN101C145 / 147

Type		MN101C145 (under development) / 147	
ROM (x8-bit)		8K/16K (External memory can be expanded)	
RAM (x8-bit)		256/512 (External memory can be expanded)	
Minimum Instruction Execution Time		0.10 μs (at 4.5 to 5.5V, 20MHz) 0.25 μs (at 2.7 to 5.5V, 8MHz) 1.00 μs (at 2.0 to 5.5V, 2MHz)* 125 μs (at 2.0 to 5.5V, 32kHz)* * The lower limit for operation guarantee for EPROM built-in version is 2.7V.	
Interrupts		• RESET • Watchdog • External 0 • External 1 • External 2 • External 3 • External 4 • Timer 2 • Timer 3 • Timer 4 • Timer 5 • Time Base • Serial 0 • Automatic Transfer finish • A/D Conversion finish	
Timer Counter		Timer Counter 2 : 8-bit x 1 (Square-wave/8-bit PWM Output, Event Count, Generation of Remote Control Carrier) Clock Source 1/1, 1/4 of System Clock, 1/1 of XI Oscillation Clock, External Clock Input Interrupt Source Coincidence with Compare Register 2 Timer Counter 3 : 8-bit x 1 (Square-wave Output, Event Count, Generation of Remote Control Carrier, Serial 0 Baud Rate Timer) Clock Source 1/4, 1/16 of System Clock, 1/1 of OSC Oscillation Clock, External Clock Input Interrupt Source Coincidence with Compare Register 3 Timer Counter 2, 3 can be cascade-connected. Timer Counter 4 : 16-bit x 1 (Square-wave/16-bit PWM Output, Event Count, Synchronous Output Event, Input Capture) Clock Source 1/4, 1/16 of System Clock, 1/1 of OSC Oscillation Clock, External Clock Input Interrupt Source Coincidence with Compare Register 4 Time Base Timer (One-minute Count Setting, Independently operable 8-bit Timer Counter 5) Clock Source 1/4 of System Clock, 1/1, 1/8192 of OSC Oscillation Clock, 1/1, 1/8192 of XI Oscillation Clock Interrupt Source Coincidence with Compare Register 5, 1/8192 Prescaler Overflow Watchdog Timer Interrupt Source 1/65536, 1/262144, 1/1048576 of System Clock (ROM Option)	
Serial Interface		Serial 0 : 8-bit x 1 [Synchronous Type/Simple UART(Half-duplex)] Clock Source 1/2, 1/4, 1/16 of System Clock 1/2 of Timer Counter 3	
I/O Pins	I/O	41	• Common use 37 • Specified pull-up Resistor available • Input/Output selectable (bit unit)
	Input	13	• Common use • Specified pull-up Resistor available

A/D Inputs	10-bit x 8ch (with S/H)
Special Ports	Buzzer Output, Remote Control Carrier Signal Output, High-current Drive Port
Package	LQFP064-P-1414
Electrical Characteristics	


Supply Current

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating Supply Current	IDD1	fosc = 20MHz, VDD = 5V			60	mA
	IDD2	fx = 32kHz, VDD = 3V			100	μA
Supply Current at HALT	IDD3	fx = 32kHz, VDD = 3V			8	μA
Supply Current at STOP	IDD4	VDD = 5V, Ta = 25°C			1	μA
		VDD = 5V, Ta = -40 to +85°C			30	μA

Support Tool

In-Circuit Emulator		PX-ICE101C / D + PX-PRB101C14-C / D	
EPROM built-in Type	Type	MN101CP147	
	ROM (x 8-bit)	16K	
	RAM (x 8-bit)	512	
	Minimum Instruction Execution Time	0 10μs (at 4 5 to 5 5V, 20MHz) 0 25μs (at 2 7 to 5 5V, 8MHz)	
	Package	LQFP064-P-1414	

Pin Assignment

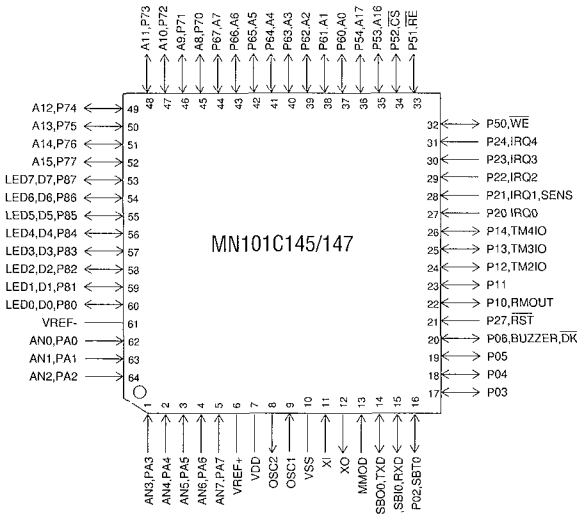

LQFP064-P-1414