

MN1874876

Type		MN1874876	
ROM (x8-bit)		48K	
RAM (x8-bit)		928	
Minimum Instruction Execution Time		0.5μs at 2/3 frequency dividing (at 4.5 to 5.5V, 12MHz)	
Interrupts		• RESET • External 0 • External 1 • External 2 • External 3 • Timer 0 • Timer 1 • Timer 2 • I ² C • Serial • Remote Control • Line 21 • MOSD • COSD	
Timer Counter		Timer Counter 0 : 8-bit x 1 Clock Source . . 1/1, 1/4, 1/16, 1/64 of System Clock Interrupt Source . . Overflow of Timer Counter 0 Timer Counter 1 : 8-bit x 1 Clock Source 1/2, 1/16, 1/64, 1/256, 1/512 of System Clock Interrupt Source . . Overflow of Timer Counter 1 Time Base Counter Clock Source 1/4096 of System Clock Interrupt Source . . 1/1, 1/2, 1/4, 1/8 of Timer Counter 2 Watchdog Counter for Clock (Clock function) AC Counter	
Serial Interface		Serial 0 : 8-bit x 1 (Transmission/Reception of variable bit length, Transfer direction of MSB/LSB selectable, Clock Polarity selectable, Start Condition function) Clock Source . . System Clock I²C x 1 (Two bus line system)	
I/O Pins	I/O	36	• Common use 28
	Input	3	• Common use 3
	High Voltage Output	7	• Nch Open-drain (Breakdown Voltage 12V) 7
A/D Inputs		5/7-bit x 10ch (without S/H)	
PWM		14-bit x 1ch (Repetition Cycle 16μs, at 12MHz), 8-bit x 8ch (Repetition Cycle 32μs, at 12MHz), 7-bit x 1ch (Repetition Cycle 16μs, at 12MHz)	
Special Ports		Hsync Detection, Remote Control Reception	
CRTC		Double OSD built-in (Menu OSD 12 x 18, 256 letters, Caption OSD 12 x 26, 176 letters)	
Notes		Remote Control Data Detection Circuit built-in	
Package		SDIP064-P-0750 QFH064-P-1414B	

Electrical Characteristics

A/D Converter Characteristics


Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
A/D Conversion Time	T _{AD}	f _{osc} =12MHz	9/12			μs
Analog Input Voltage	V _{AD}		VSS		VDD	V

(Ta= -20 to +70°C, VDD=5.0V, VSS=0V)

Support Tool

In-Circuit Emulator	PX-ICE1870 / 80 + PX-PRB1876462, PX-PRB1876476	
EPROM built-in Type	Type	MN18P76476
	ROM (x 8-bit)	64K
	RAM (x 8-bit)	928
	Minimum Instruction Execution Time	0.5μs (at 4.5 to 5.5V, 12MHz)
	Package	SDIP064-P-0750


Pin Assignment

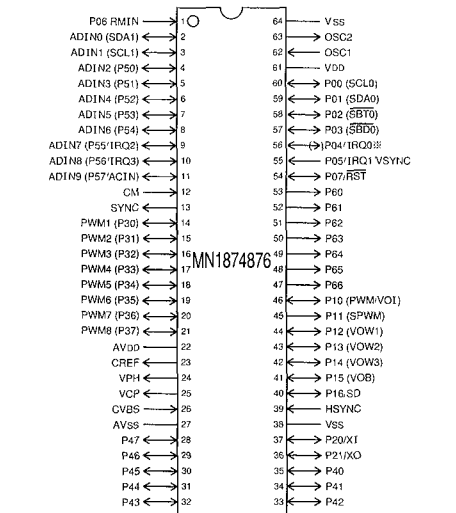

※P04 • IRQ0 pin

TYPE A	Stand-by function is available	Input pin
TYPE B	Stand-by function is not available	I/O pin

SDIP064-P-0750

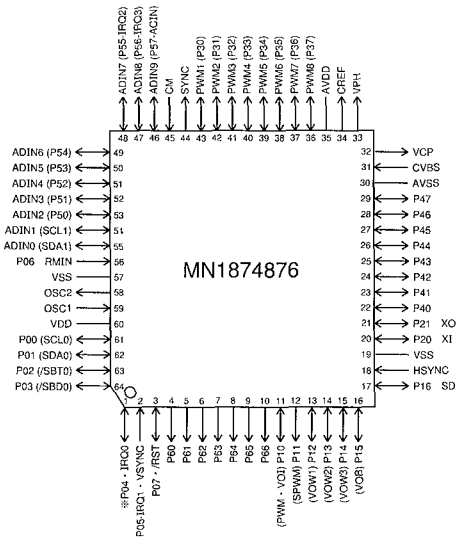

※P04 • IRQ0 pin

TYPE A	Stand-by function is available	Input pin
TYPE B	Stand-by function is not available	I/O pin

QFH064-P-1414B