

MN3008

2048-STAGE LOW NOISE BBD

General description

The MN3008 is a 2048-stage long delay low noise BBD that provides a signal delay of up to 102.4msec.


The MN3008 is particularly suitable for use as reverberation effect in electronic musical instruments such as stereo equipment due to its long delay time.

Features


- Variable delay time of audio signal: 10.24 ~ 102.4ms.
- Clock component cancellation capability.
- No insertion loss: $L_i = 0\text{dB}$ typ.
- Wide dynamic range: $S/N = 78\text{dB}$ typ.
- Wide frequency response: $f_i \leq 10\text{KHz}$.
- Low distortion: $\text{THD} = 0.5\%$ typ. ($V_i = 0.78\text{Vrms}$).
- Clock frequency range: 10 ~ 100KHz.
- P channel silicon gate process.
- Special 8-Lead Dual-In-Line Plastic Package.

Applications

- Reverberation effect of echo microphone and stereo equipments.
- Chorus effects in electronic musical instruments.
- Variable or fixed delay of analog signals.
- Telephone time compression and delay line for voice communication systems, etc.

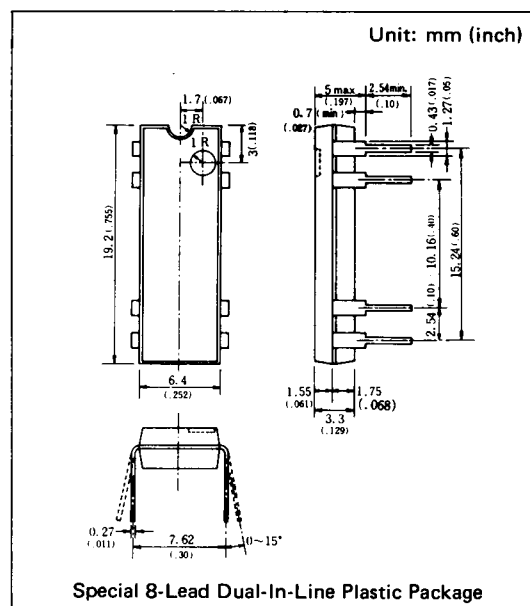

Block Diagram

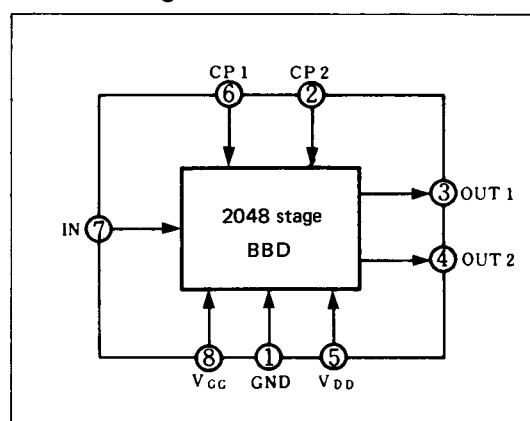

Quick Reference Data

Item	Symbol	Value	Unit
Supply Voltage	V_{DD}, V_{GG}	$-15, V_{DD} + 1$	V
Signal Delay Time	t_D	10.24~102.4	ms
Total Harmonic Distortion	THD	0.5	%
Signal to Noise Ratio	S/N	78	dB

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Terminal Voltage	$V_{DD}, V_{GG}, V_{CP}, V_i$	-18~+0.3	V
Output Voltage	V_o	-18~+0.3	V
Operating Temperature	T_{opr}	-20~+60	°C
Storage Temperature	T_{stg}	-55~+125	°C


Operating Conditions (Ta = 25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Drain Supply Voltage	V_{DD}		-14	-15	-16	V
Gate Supply Voltage	V_{GG}			$V_{DD} + 1$		V
Clock Voltage "H" Level	V_{CPH}		0		-1	V
Clock Voltage "L" Level	V_{CPL}			V_{DD}		V
Clock Input Capacitance	C_{CP}				1400	pF
Clock Frequency	f_{CP}		10		100	kHz
Clock Pulse Width *1	t_{cpw}				$0.5T^{*2}$	
Clock Rise Time *1	t_{cpr}				500	ns
Clock Fall Time *1	t_{cpf}				500	ns
Clock Cross Point *1	V_X		0		-3	V
Input DC Bias	V_{Bias}		-5		-10	V

Electrical Characteristics (Ta = 25°C, $V_{DD} = V_{CPL} = -15V$, $V_{CPH} = 0V$, $V_{GG} = -14V$, $R_L = 100k\Omega$)


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Signal Delay Time	t_D		10.24		102.4	ms
Input Signal Frequency	f_i	$f_{cp} = 40kHz$, $V_i = 1.7V_{rms}$ 3dB down (0dB at $f_i = 1kHz$)	10			kHz
Input Signal Swing	V_i	$f_{CP}=40kHz$, $f_i = 1kHz$, THD=2:5%	1.2			Vrms
Insertion Loss	L_i	$f_{CP}=40kHz$, $f_i = 1kHz$, $V_i = 1.2V_{rms}$	-4	0	+4	dB
Total Harmonic Distortion	THD	$f_{CP}=40kHz$, $f_i = 1kHz$, $V_i = 0.78V_{rms}$		0.5	2.5	%
Noise	V_{no}	$f_{cp} = 100kHz$, weighted by "A" curve			0.4	mVrms
Signal to Noise Ratio	S/N			78		dB

***1 Clock Pulse Waveforms**

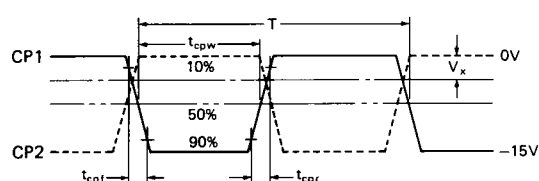


*2 $T = 1/f_{CP}$ (Clock period)










Terminal Assignments

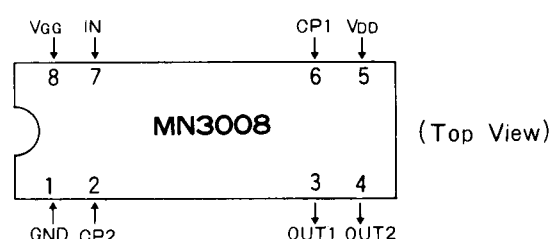







Circuit Diagram

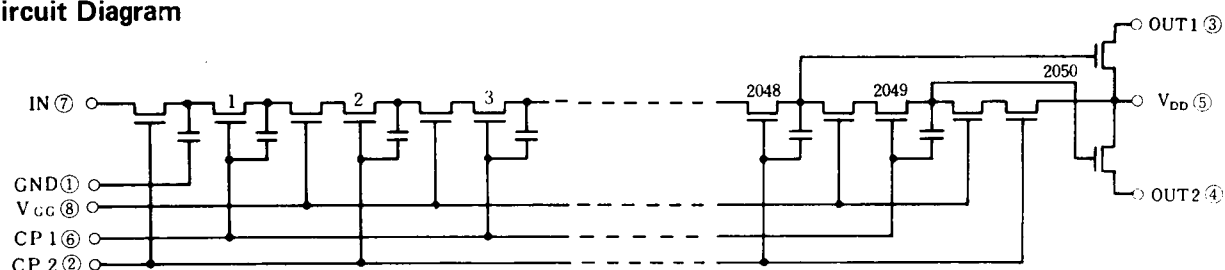


■ Typical Electrical Characteristic Curves

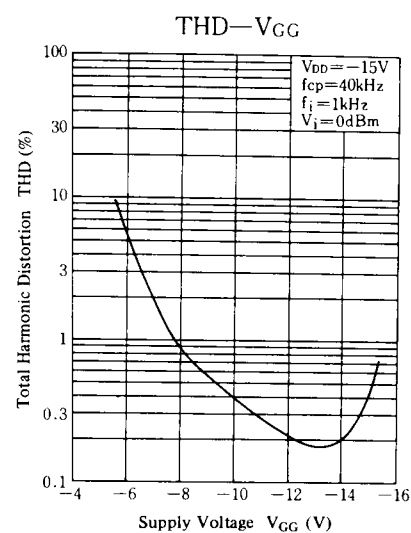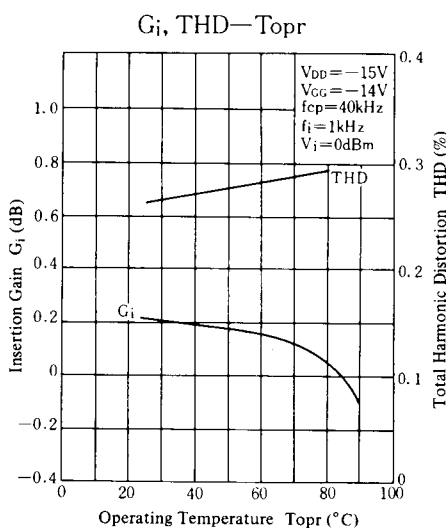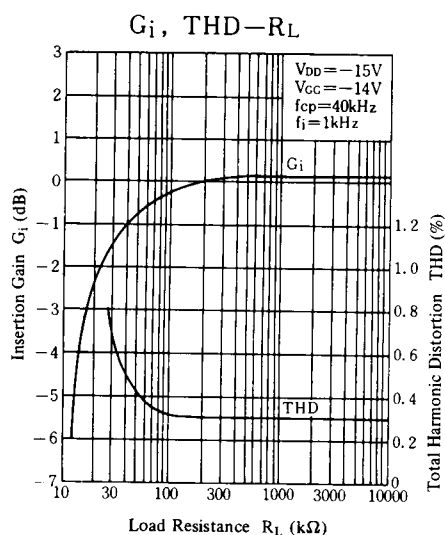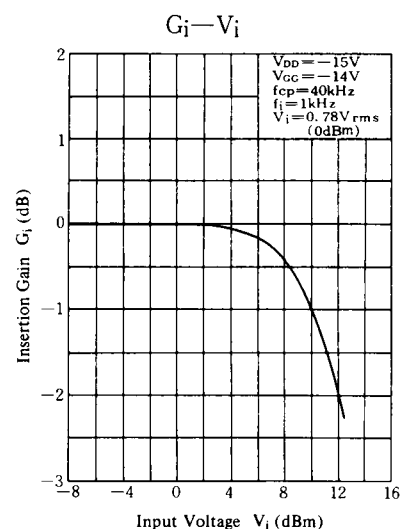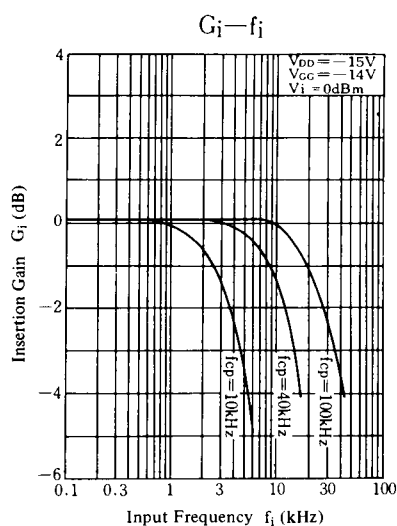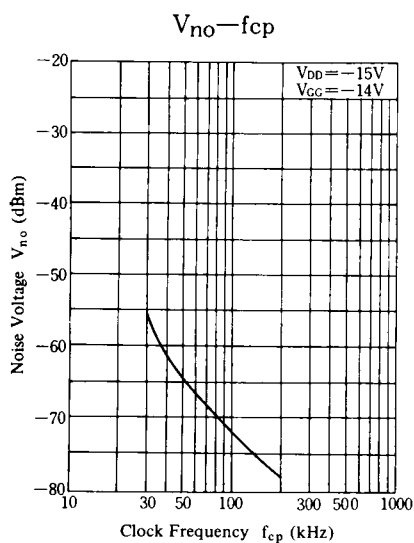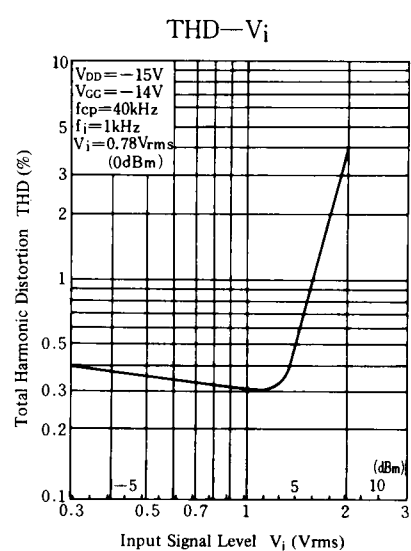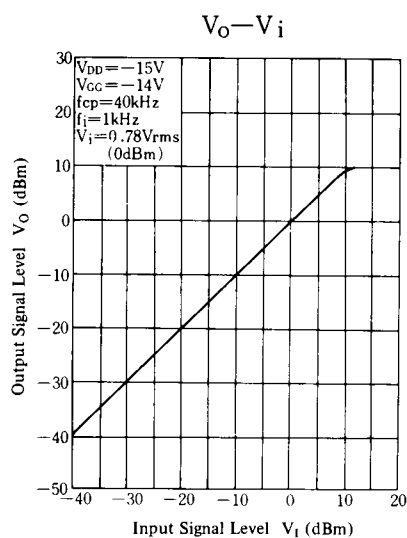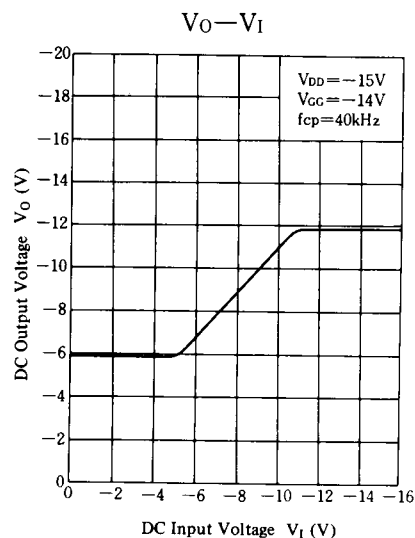

Supply Voltage Characteristics

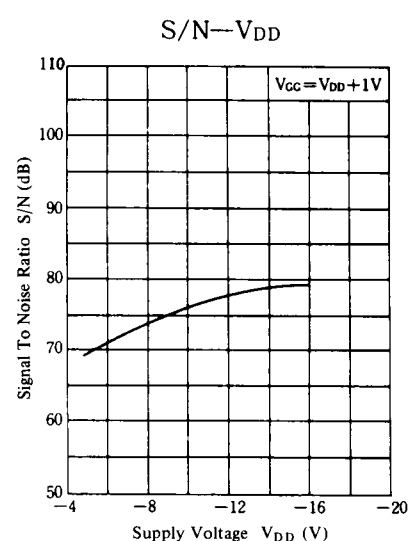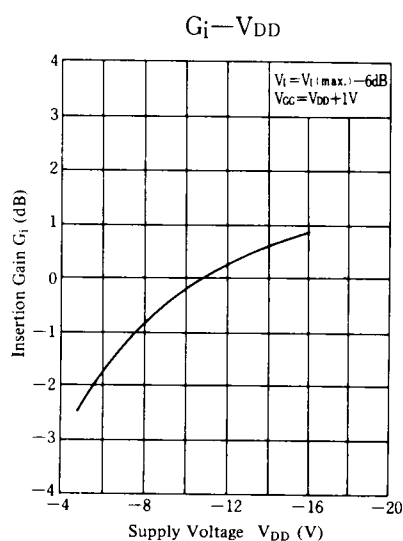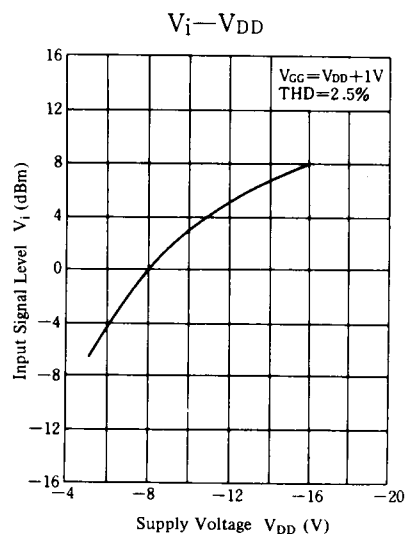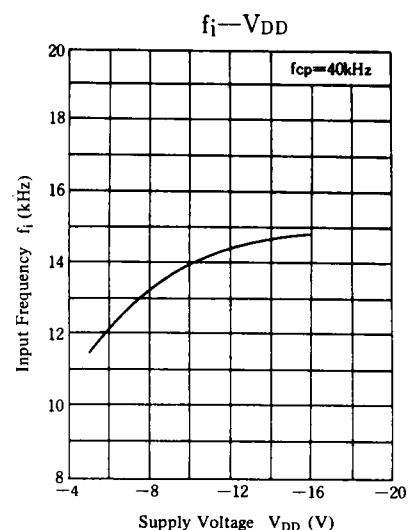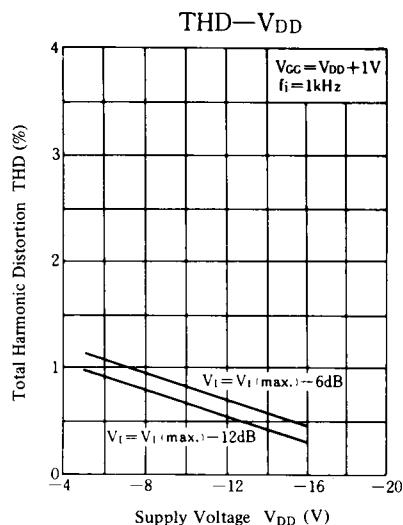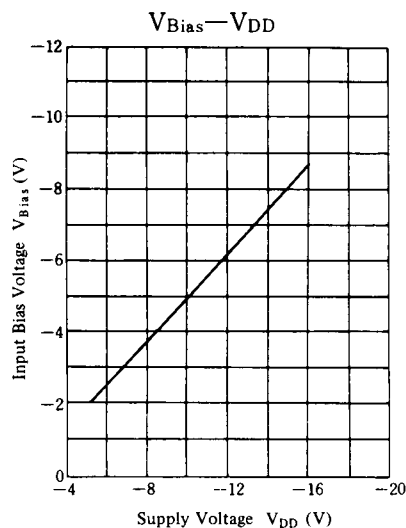

Application Circuit

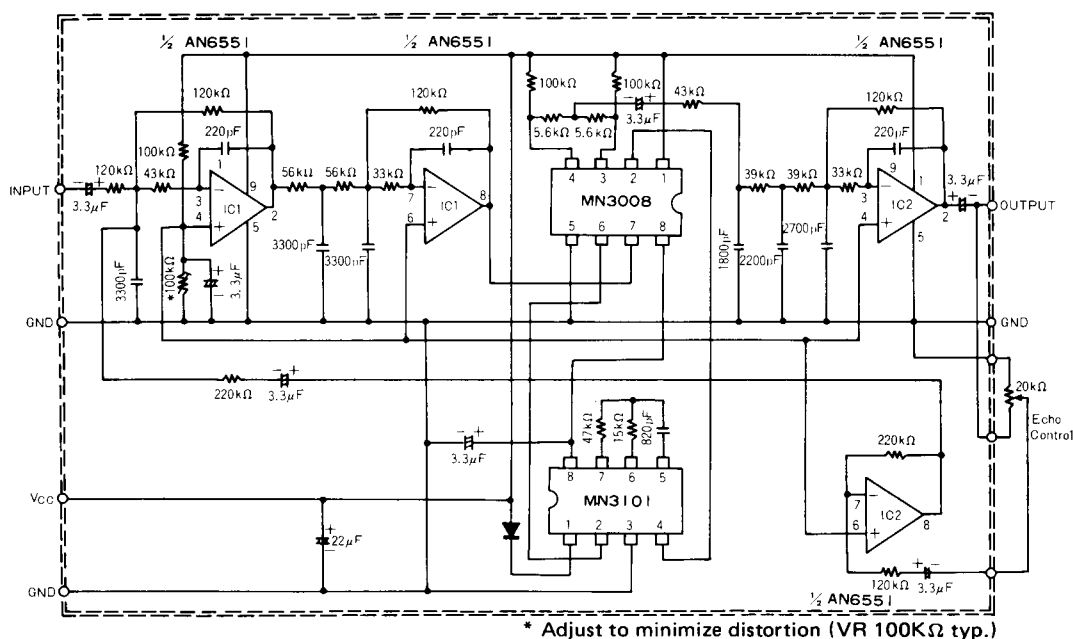

Reverberation Effect Generation Circuit (Signal Delay Over 100msec.)