

August 1995

8A, 400V - 600V Ultrafast Diodes

Features

- Ultrafast Recovery Time ($t_{RR} < 50\text{ns}$)
- Low Forward Voltage
- Low Thermal Resistance
- Hard Glass Passivation
- Wire-Bonded Construction

Applications


- General Purpose
- Power Switching Circuits to 100kHz
- Output Rectification in Switching Power Supplies

Description

MUR840, MUR850, MUR860 and RURP840, RURP850, RURP860 are low forward voltage drop ultrafast recovery rectifiers ($t_{RR} < 50\text{ns}$). They use a glass-passivated ion-implanted, epitaxial construction.

These devices are intended for use as output rectifiers and fly-wheel diodes in a variety of high-frequency pulse-width modulated switching regulators. Their low stored charge and attendant fast reverse-recovery behavior minimize electrical noise generation and in many circuits markedly reduce the turn-on dissipation of the associated power switching transistors.

Package

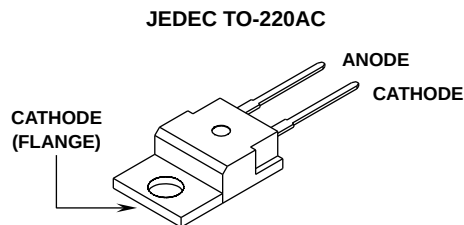

Symbol



PACKAGING AVAILABILITY

PART NUMBER	PACKAGE	BRAND
MUR840	TO-220AC	MUR840
RURP840	TO-220AC	RURP840
MUR850	TO-220AC	MUR850
RURP850	TO-220AC	RURP850
MUR860	TO-220AC	MUR860
RURP860	TO-220AC	RURP860

NOTE: When ordering, use the entire part number.

Absolute Maximum Ratings $T_C = +25^\circ\text{C}$, Unless Otherwise Specified

	MUR840 RURP840	MUR850 RURP850	MUR860 RURP860
Peak Repetitive Reverse Voltage..... V_{RRM}	400V	500V	600V
Working Peak Reverse Voltage, V_{RWM}			
DC Blocking Voltage, V_R			
Average Rectified Forward Current..... $I_{F(AV)}$	8A	8A	8A
Total Device, (Rated V_R), $T_C = +150^\circ\text{C}$			
Peak Repetitive Forward Current..... I_{FM}	16A	16A	16A
(Rated V_R , Square Wave, 20kHz), $T_C = +150^\circ\text{C}$			
Nonrepetitive Peak Surge Current..... I_{FSM}	100A	100A	100A
(Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60Hz)			
Operating and Storage Temperature..... T_{STG}, T_J	-65°C to $+175^\circ\text{C}$	-65°C to $+175^\circ\text{C}$	-65°C to $+175^\circ\text{C}$
Maximum Lead Temperature During Solder..... T_L	260°C	260°C	260°C
(At distance $> \frac{1}{8}"$ (3.17mm) from case for 10s max)			

Specifications MUR840, MUR850, MUR860, RURP840, RURP850, RURP860

Electrical Specifications $T_C = +25^\circ\text{C}$, Unless Otherwise Specified

SYMBOL	TEST CONDITION	LIMITS									UNITS
		MUR840, RURP840			MUR850, RURP850			MUR860, RURP860			
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
V _F	I _F = 8A, T _C = +150°C	-	-	1.0	-	-	1.2	-	-	1.2	V
	I _F = 8A, T _C = +25°C	-	-	1.3	-	-	1.5	-	-	1.5	V
I _R at T _C = +150°C	V _R = 400V	-	-	500	-	-	-	-	-	-	μA
	V _R = 500V	-	-	-	-	-	500	-	-	-	μA
	V _R = 600V	-	-	-	-	-	-	-	-	500	μA
I _R at T _C = +25°C	V _R = 400V	-	-	100	-	-	-	-	-	-	μA
	V _R = 500V	-	-	-	-	-	100	-	-	-	μA
	V _R = 600V	-	-	-	-	-	-	-	-	100	μA
t _{RR}	I _F = 1A (Note 1)	-	-	60	-	-	60	-	-	60	ns
	I _F = 0.5 (Note 2)	-	-	50	-	-	50	-	-	50	ns
R _{θJC}		-	-	2	-	-	2	-	-	2	°C/W

NOTES:

1. $di_F/dt = 50\text{A}/\mu\text{s}$.
2. $I_R = 1.0\text{A}$, $I_{REC} = 0.25\text{A}$.

Typical Performance Curves

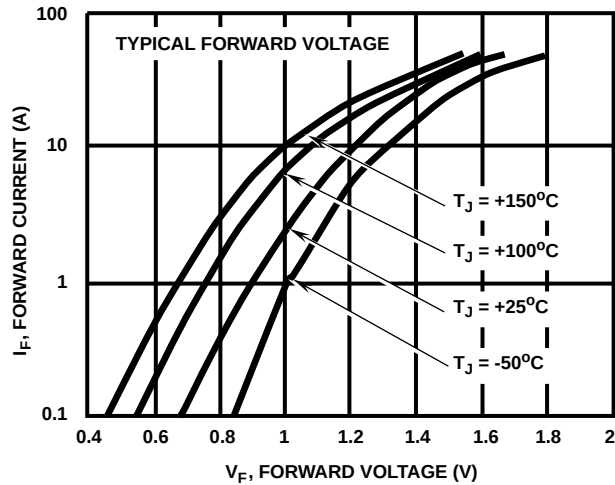


FIGURE 1. TYPICAL FORWARD VOLTAGE (MUR840, RUR840)

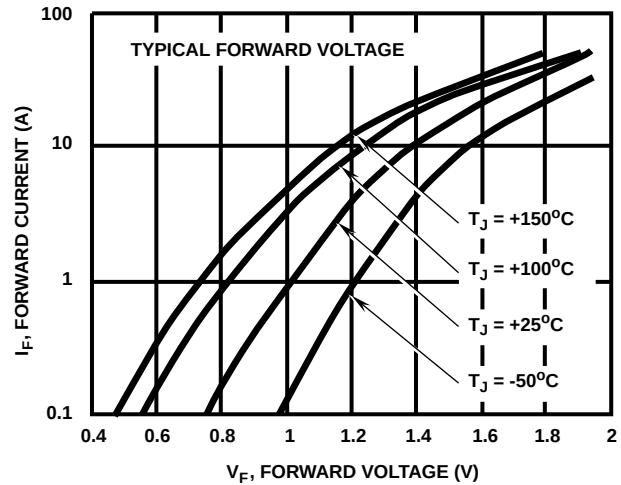


FIGURE 2. TYPICAL FORWARD VOLTAGE (MUR850, MUR860, RUR850, AND RUR860)

Typical Performance Curves (Continued)

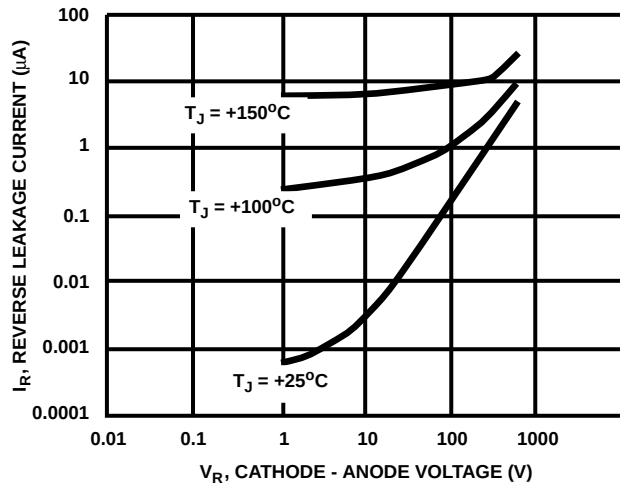


FIGURE 3. TYPICAL REVERSE LEAKAGE (MUR840, RUR840)

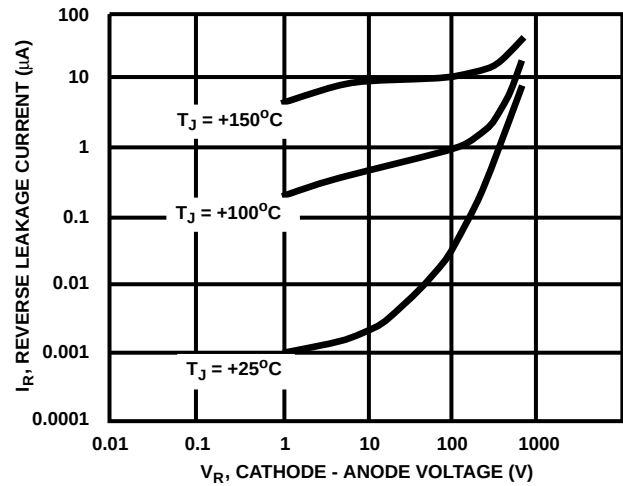


FIGURE 4. TYPICAL REVERSE LEAKAGE (MUR850, MUR860, RUR850, AND RUR860)

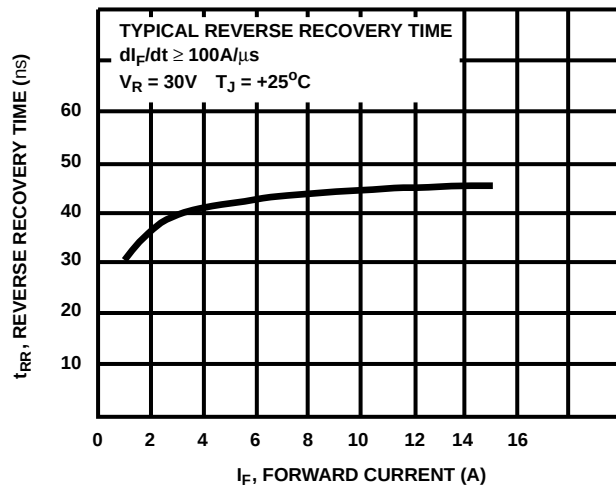


FIGURE 5. TYPICAL REVERSE RECOVERY TIME (ALL TYPES)