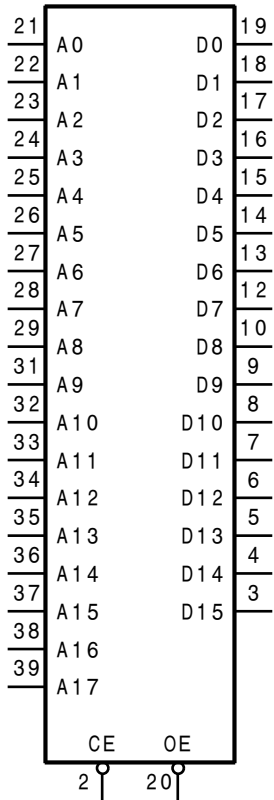
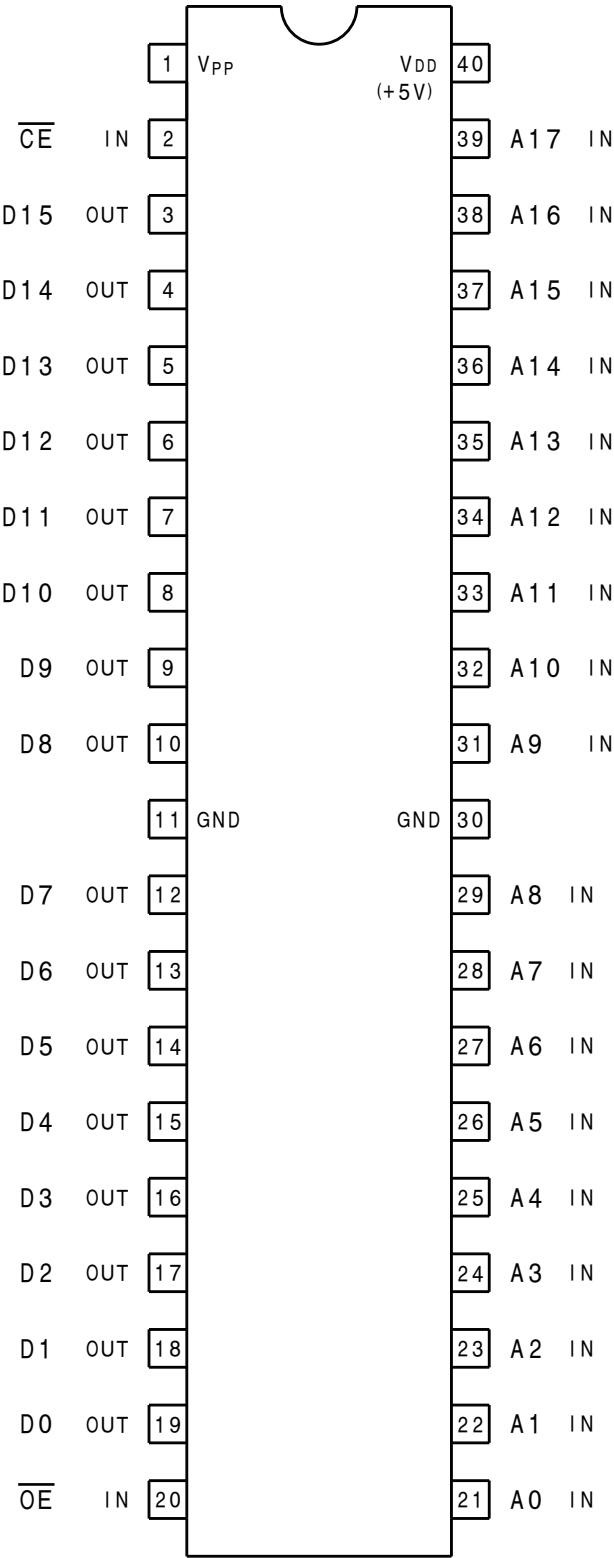

C-MOS 4M(256kx16)-BIT EPROM
-TOP VIEW-



A0-A17 ; ADDRESS INPUTS
CE ; CHIP ENABLE
D0-D15 ; DATA OUTPUTS
OE ; OUTPUT ENABLE
 V_{PP} ; PROGRAMMING VOLTAGE
(PROGRAM : +12.5V)

