


C-MOS REAL TIME CLOCK
—TOP VIEW—



- A0 - A3 ; ADDRESS BUS INPUTS
- CE ; CHIP ENABLE INPUT
- $\overline{CS}$; CHIP SELECT INPUT
- D0 - D3 ; DATA BUS INPUTS/OUTPUTS
- $\overline{INTR}$; INTRUDE OUTPUT
- OSCIN ; CRYSTAL/CLOCK INPUT
- OSCOUT ; CRYSTAL/CLOCK OUTPUT
- $\overline{RD}$; READ STROBE INPUT
- $\overline{TMOUT}$; TIMER OUTPUT
- $\overline{WR}$; WRITE STROBE INPUT

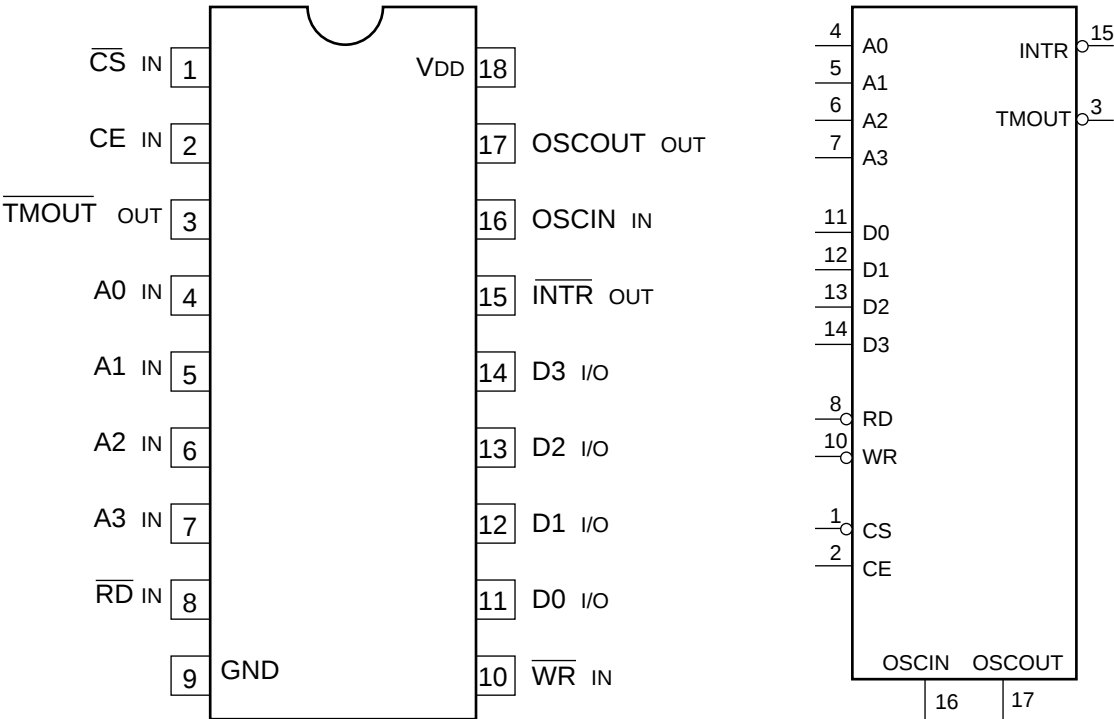