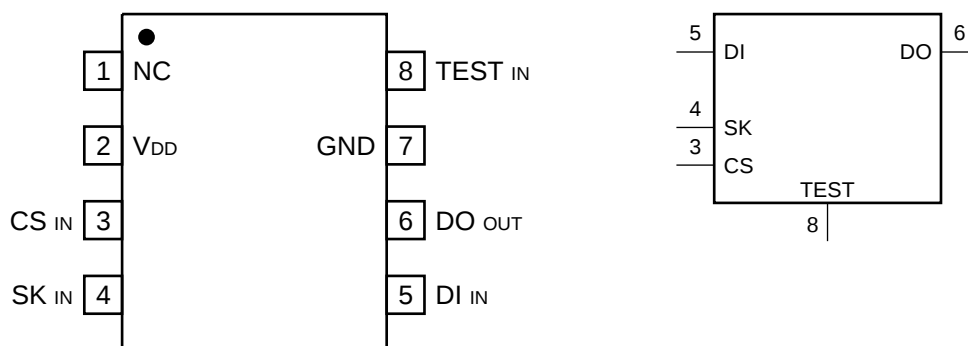

C-MOS 2K (128×16)-BIT SERIAL EEPROM

- TOP VIEW -



NOTE

OPERATION	V _{DD}
READ	+1.8 to +6.5 V
WRITE	+2.7 to +6.5 V

CS ; CHIP SELECT INPUT
 DI ; SERIAL DATA INPUT
 DO ; SERIAL DATA OUTPUT
 SK ; SERIAL CLOCK INPUT

