

SGW5N60RUF

N-CHANNEL IGBT



FEATURES

- * Short Circuit rated 10uS @Tc=100℃
- * High Speed Switching
- * Low Saturation Voltage
: $V_{CE(sat)} = 2.0\text{ V @ } I_C=5\text{A}$
- * High Input Impedance

APPLICATIONS

- * AC & DC Motor controls
- * General Purpose Inverters
- * Robotics , Servo Controls
- * Power Supply
- * Lamp Ballast

D²-PAK



ABSOLUTE MAXIMUM RATINGS

Symbol	Characteristics	Rating	Units
V_{CES}	Collector-Emitter Voltage	600	V
V_{GES}	Gate-Emitter Voltage	± 20	V
I_C	Collector Current @ Tc = 25℃	8	A
	Collector Current @ Tc = 100℃	5	A
$I_{CM(1)}$	Pulsed Collector Current	15	A
P_C	Maximum Power Dissipation @Tc = 25℃	60	W
	Maximum Power Dissipation @Tc = 100℃	25	W
Tsc	Short Circuit Withstand Time	10	uS
Tj	Operating Junction Temperature	-55 ~ 150	℃
Tstg	Storage Temperature Range	-55 ~ 150	℃
TL	Maximum Lead Temp. For Soldering Purposes, 1/8" from case for 5 seconds	300	℃

Notes: (1) Repetitive rating : Pulse width limited by max. junction temperature





ELECTRICAL CHARACTERISTICS
(T_c=25°C, Unless Otherwise Specified)

Symbol	Characteristics	Test Conditions	Min	Typ	Max	Units
BV _{CES}	C - E Breakdown Voltage	V _{GE} = 0V , I _C = 250μA	600	-	-	V
ΔV _{CES} / ΔT _J	Temperature Coeff. of Breakdown Voltage	V _{GE} = 0V , I _C = 1mA	-	0.6	-	V/°C
V _{GE(th)}	G - E threshold voltage	I _C = 5mA , V _{CE} = V _{GE}	5.0	6.0	8.0	V
I _{CES}	Collector cutoff Current	V _{CE} = V _{CES} , V _{GE} = 0V	-	-	250	μA
I _{GES}	G - E leakage Current	V _{GE} = V _{GES} , V _{CE} = 0V	-	-	100	nA
V _{CE(sat)}	Collector to Emitter saturation voltage	I _C =5A, V _{GE} = 15V	-	2.0	2.7	V
		I _C =8A, V _{GE} = 15V	-	2.5	-	V
Cies	Input capacitance	V _{GE} = 0V , f = 1MHz V _{CE} = 30V	-	337	-	pF
Co _{es}	Output capacitance		-	36	-	pF
Cr _{es}	Reverse transfer capacitance		-	13	-	pF
td(on)	Turn on delay time	V _{CC} = 300V , I _C = 5A V _{GE} = 15V R _G = 40 Ω Inductive Load	-	9	-	nS
tr	Turn on rise time		-	18	-	nS
td(off)	Turn off delay time		-	46	75	nS
tf	Turn off fall time		-	140	280	nS
Eon	Turn on Switching Loss		-	80	-	μJ
Eoff	Turn off Switching Loss		-	100	-	μJ
Ets	Total Switching Loss		-	180	270	μJ
Tsc	Short Circuit withstand Time	V _{CC} = 300V, V _{GE} = 15V @T _c = 100°C	10	-	-	μS
Qg	Total Gate Charge	V _{CC} = 300V V _{GE} = 15V I _C = 5A	-	24	36	nC
Qge	Gate-Emitter Charge		-	7	10	nC
Qgc	Gate-Collector Charge		-	8	12	nC

SGW5N60RUF***N-CHANNEL IGBT***

THERMAL RESISTANCE

Symbol	Characteristics	Min	Typ	Max	Units
$R_{\theta JC}$	Junction-to-Case	-	-	2.0	°C/W
$R_{\theta JA}$	Junction-to-Ambient (PCB mount)	-	-	40	°C/W

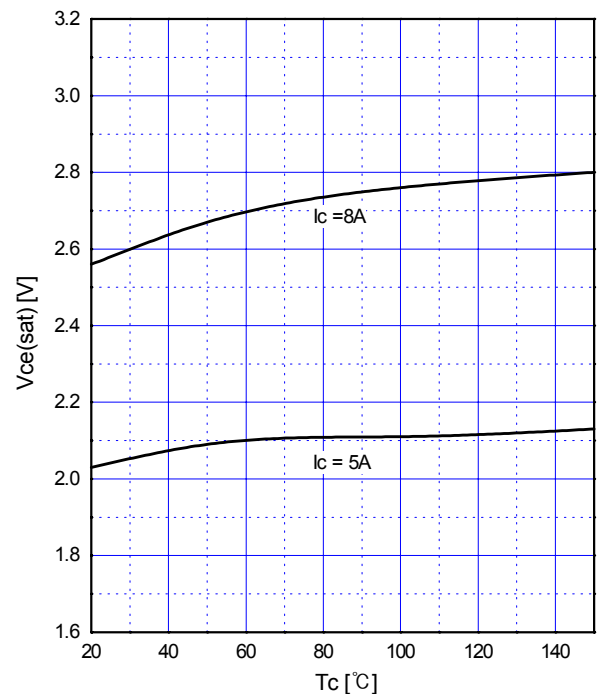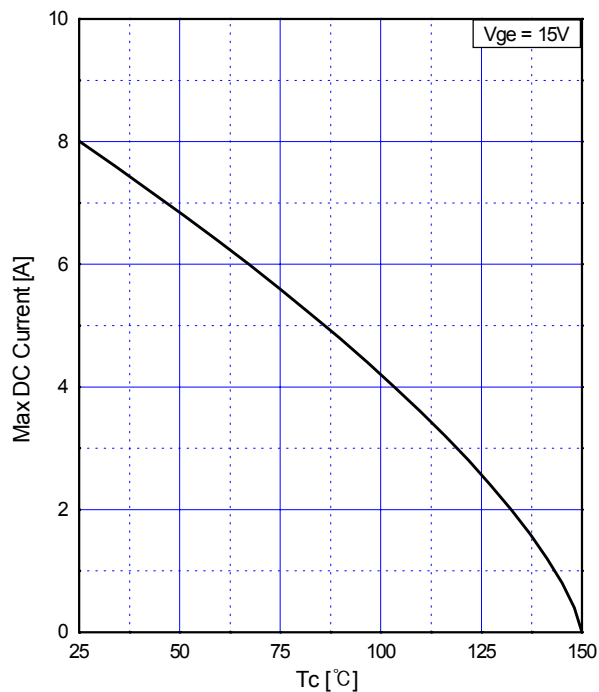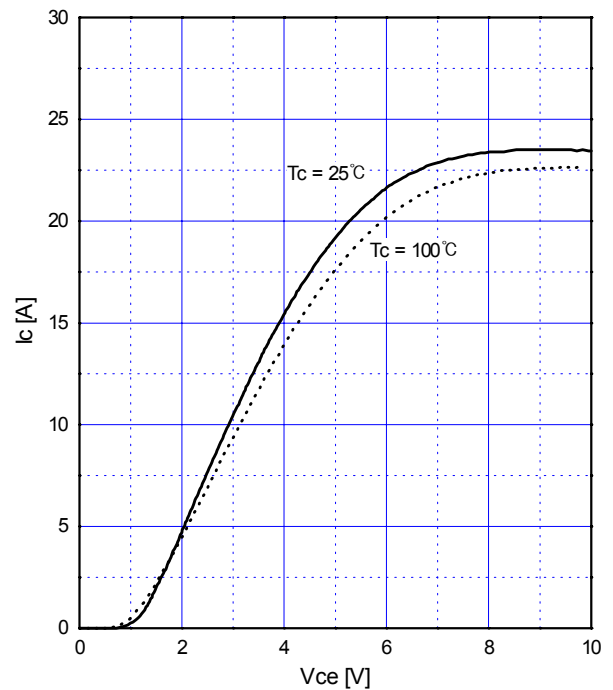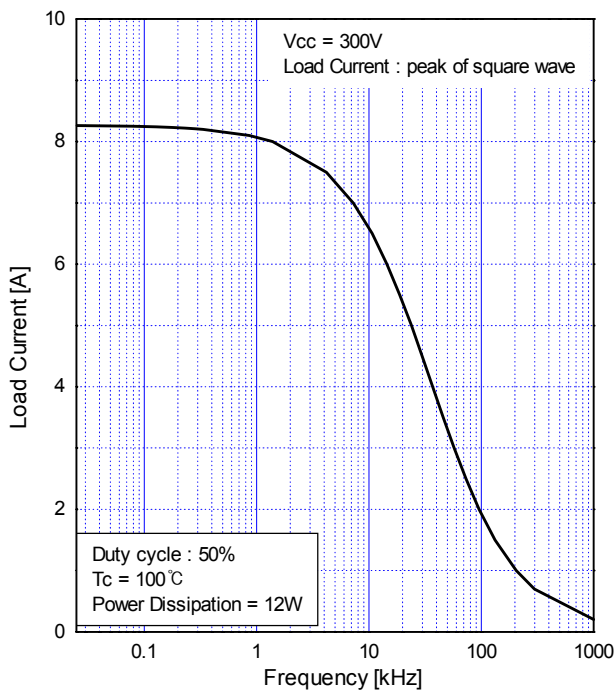

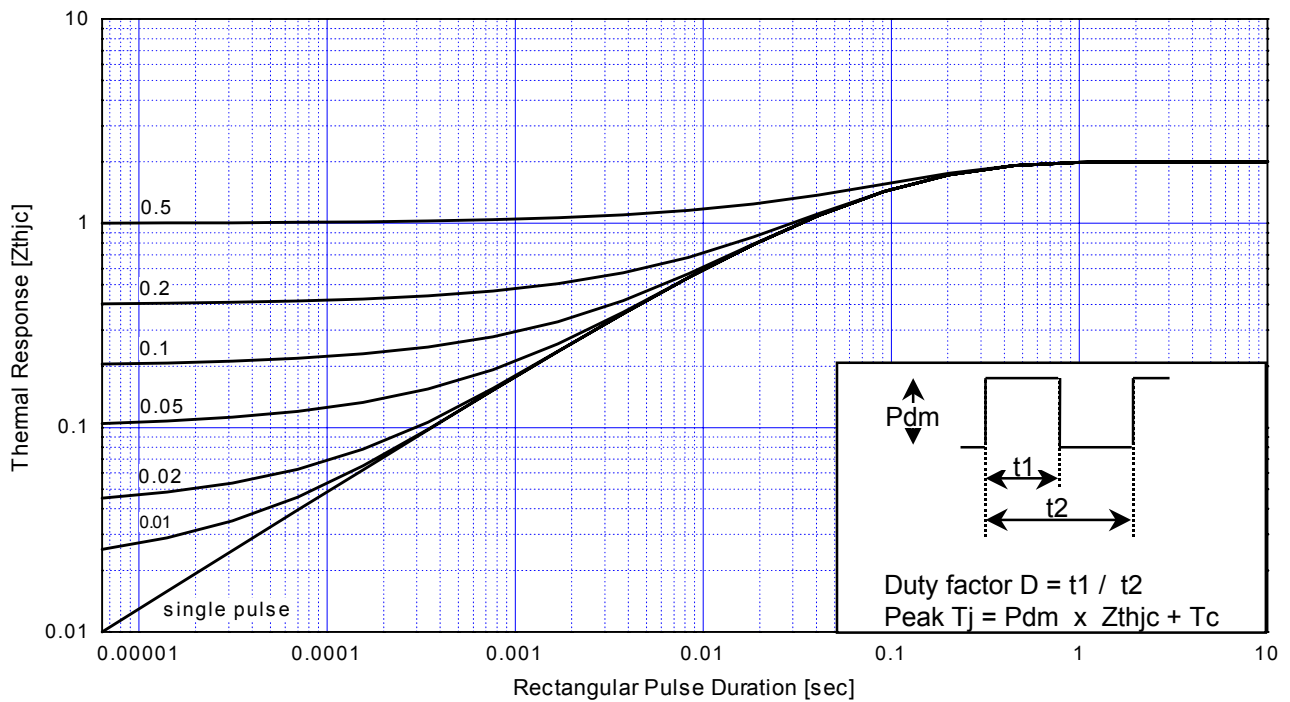


Fig.5 Maximum Effective Transient Thermal Impedance, Junction to Case

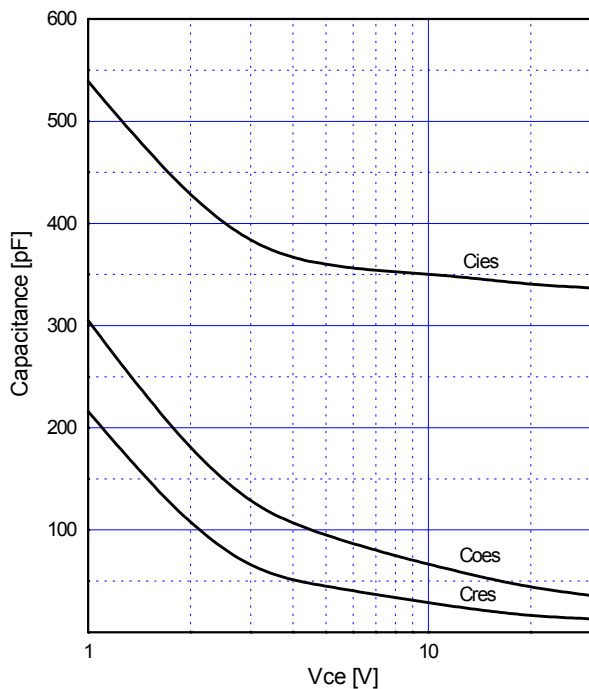


Fig.6 Typical Capacitance vs. Collector to Emitter Voltage

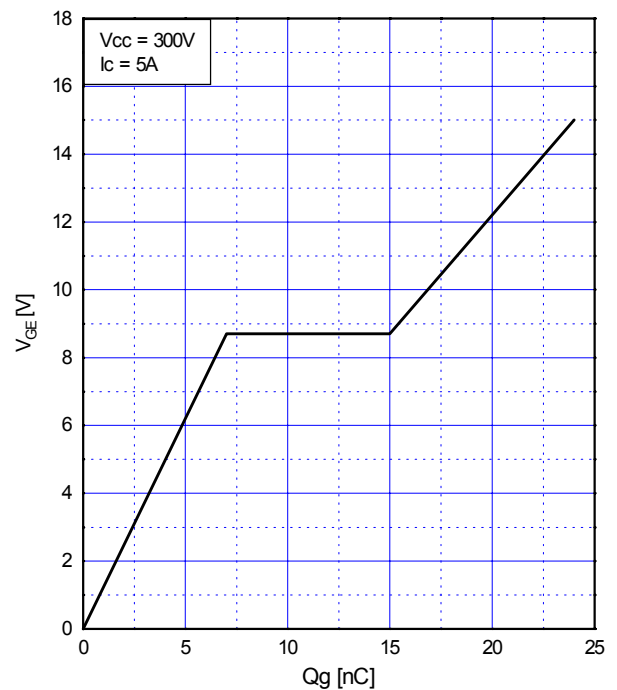


Fig.7 Typical Gate Charge vs. Gate to Emitter Voltage

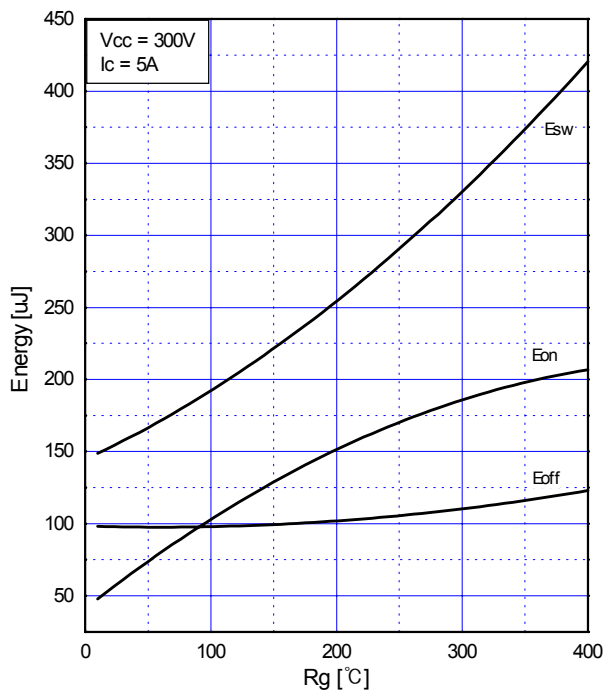


Fig.8 Typical Switching Loss vs. Gate Resistance

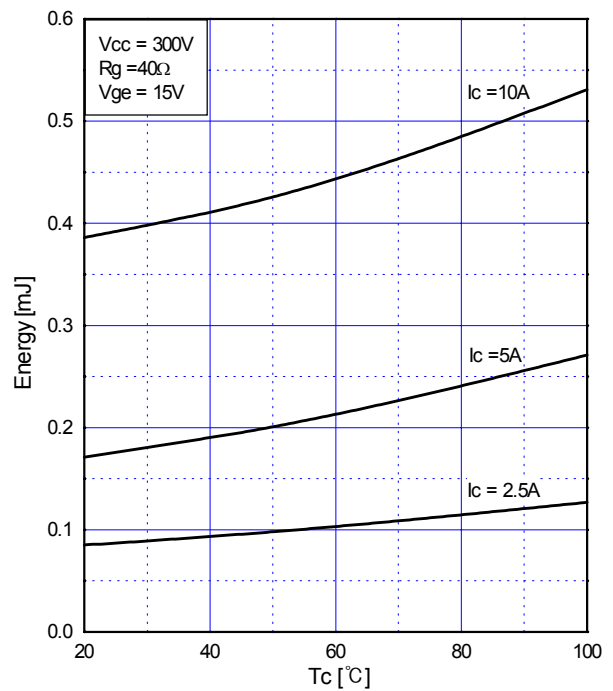


Fig.9 Typical Switching Loss vs. Case Temperature

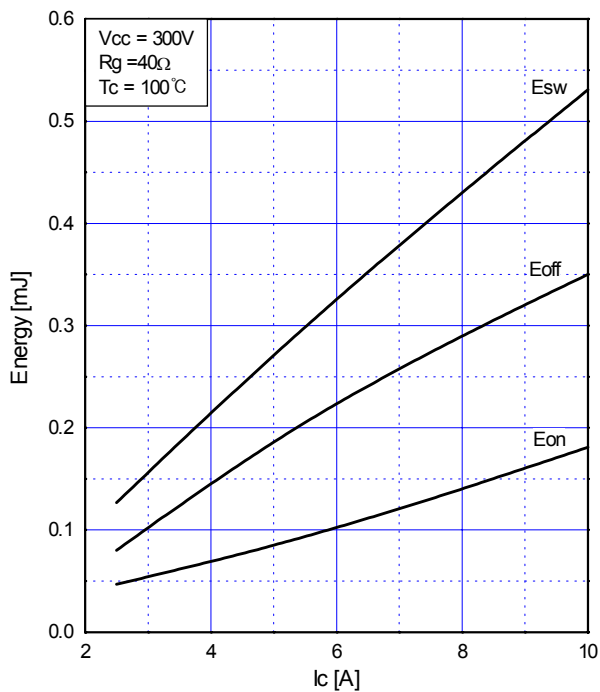


Fig.10 Typical Switching loss vs. Collector to Emitter Current

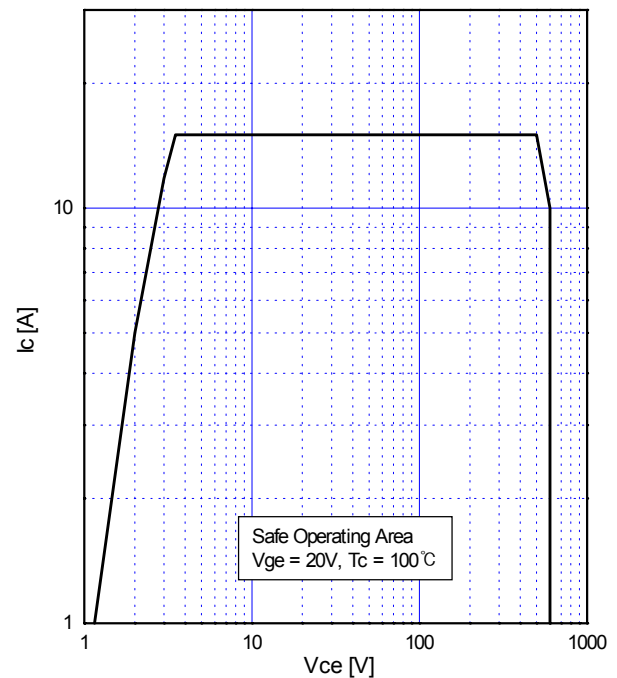


Fig.11 Turn-off SOA