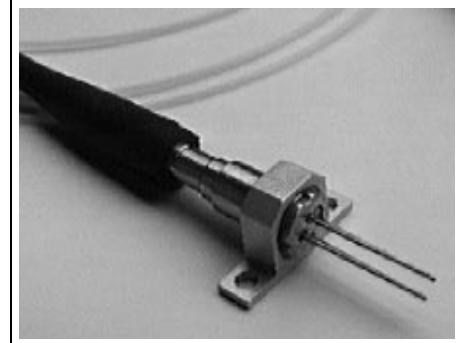


**1300 nm Laser in Coaxial Package with SM-Pigtail,  
High Power****STH 51004X  
STH 51005X**

- Designed for application in fiber-optic networks
- Laser Diode with Multi-Quantum Well structure
- Suitable for bit rates up to 1 Gbit/s
- Ternary photodiode at rear mirror for monitoring and control of radiant power
- Hermetically sealed subcomponent, similar to TO 18
- SM Pigtail with optional flange



| Type       | Ordering Code | Connector/Flange     |
|------------|---------------|----------------------|
| STH 51004G | Q62702-P3002  | FC / without flange  |
| STH 51004A | Q62702-Pxxxx  | DIN / without flange |
| STH 51005G | Q62702-P3083  | FC / with flange     |
| STH 51005A | Q62702-Pxxxx  | DIN / with flange    |

**Component with other connector types on request.****Maximum Ratings**

Output power ratings refer to the SM fiber output. The operating temperature of the submount is identical to the case temperature.

| Parameter   | Symbol    | Values        | Unit |
|---|-----------|---------------|------|
| <b>Module</b>   |           |               |      |
| Operating temperature range at case   | $T_c$     | - 40 ... + 85 | °C   |
| Storage temperature range   | $T_{stg}$ | - 40 ... + 85 | °C   |
| Soldering temperature<br>$t_{max} = 10$ s, 2 mm distance from bottom edge of case | $T_s$     | 260           | °C   |

**Laserdiode**

|                        |           |     |    |
|------------------------|-----------|-----|----|
| Direct forward current | $I_F$ max | 120 | mA |
| Radiant power CW       | $\Phi_e$  | 4   | mW |
| Reverse voltage        | $V_R$ max | 2   | V  |

**Maximum Ratings (cont'd)**

| Parameter            | Symbol    | Values | Unit |
|----------------------|-----------|--------|------|
| <b>Monitor Diode</b> |           |        |      |
| Reverse voltage      | $V_R$ max | 10     | V    |

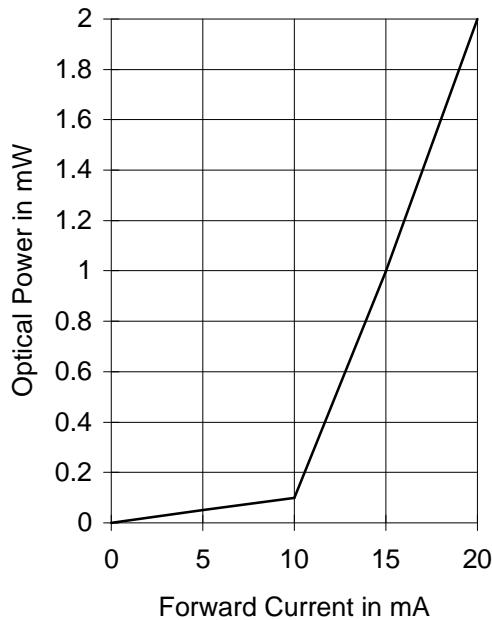
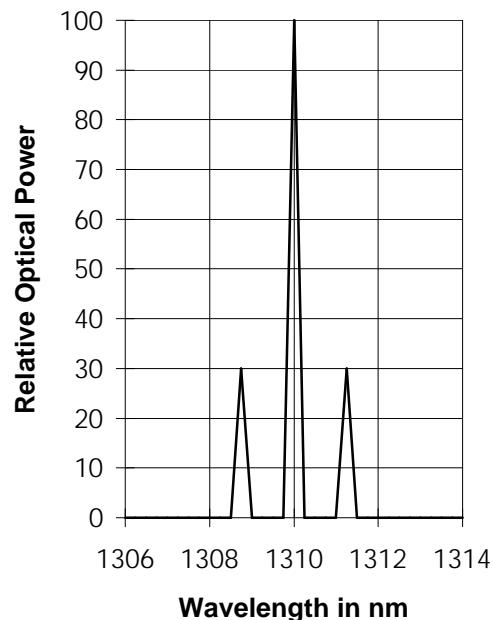
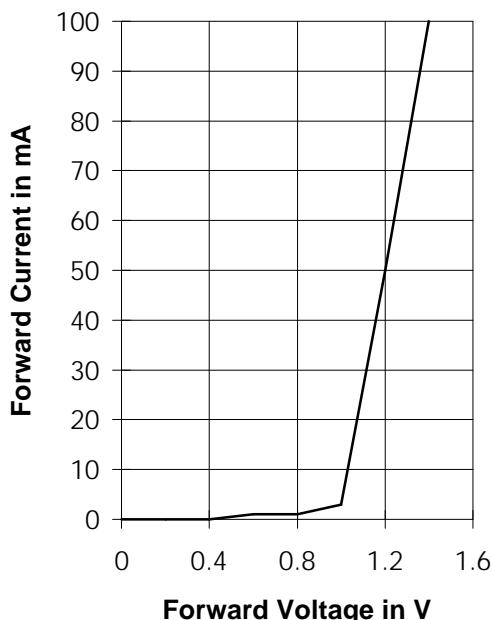
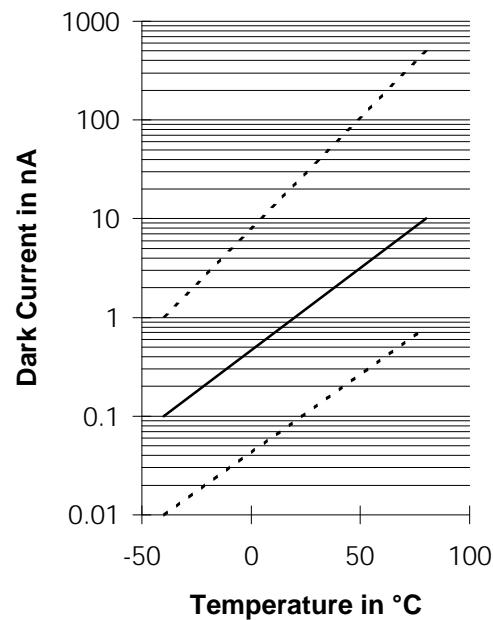
**Characteristics**

All optical data refer to a coupled 10/125  $\mu\text{m}$  SM fiber,  $T_C = 25^\circ\text{C}$ .


| Parameter  | Symbol          | Values        | Unit          |
|--|-----------------|---------------|---------------|
| <b>Laser Diode</b>   |                 |               |               |
| Optical output power   | $\Phi_e$        | > 2.4         | mW            |
| Emission wavelength center of range<br>$\Phi_e = 0.5 \text{ mW}$ | $\lambda$       | 1280 ... 1330 | nm            |
| Spectral bandwidth $\Phi_e = 0.5 \text{ mW}$ (RMS)               | $\Delta\lambda$ | < 5           | nm            |
| Threshold current ( $-40 \dots +85^\circ\text{C}$ )              | $I_{th}$        | 2 ... 45      | mA            |
| Forward voltage $\Phi_e = 0.5 \text{ mW}$                        | $V_F$           | < 1.5         | V             |
| Radiant power at threshold                                       | $\Phi_{eth}$    | < 80          | $\mu\text{W}$ |
| Slope efficiency   | $\eta$          | 40 ... 160    | mW/A          |
| Differential series resistance                                   | $r_S$           | < 8           | $\Omega$      |
| Rise time/Fall time  | $t_R, t_F$      | < 1           | ns            |

**Monitor Diode**


|  |       |              |               |
|--|-------|--------------|---------------|
| Dark current, $V_R = 5 \text{ V}$ , $\Phi_e = 0$ | $I_R$ | < 500        | nA            |
| Photo current, $\Phi_e = 0.5 \text{ mW}$         | $I_P$ | 100 ... 1000 | $\mu\text{A}$ |

**Laser Diode**  
Radiant Power in Singlemode Fiber**Relative Radiant Power**  
 $\Phi_e = f(\lambda)$ **Laser Forward Current**  
 $I_F = f(V_F)$ **Monitor Diode Dark Current  $I_R = f(T_A)$**   
 $\Phi_{port} = 0, V_R = 5 \text{ V}$ 

## Package Outlines (Dimensions in mm)

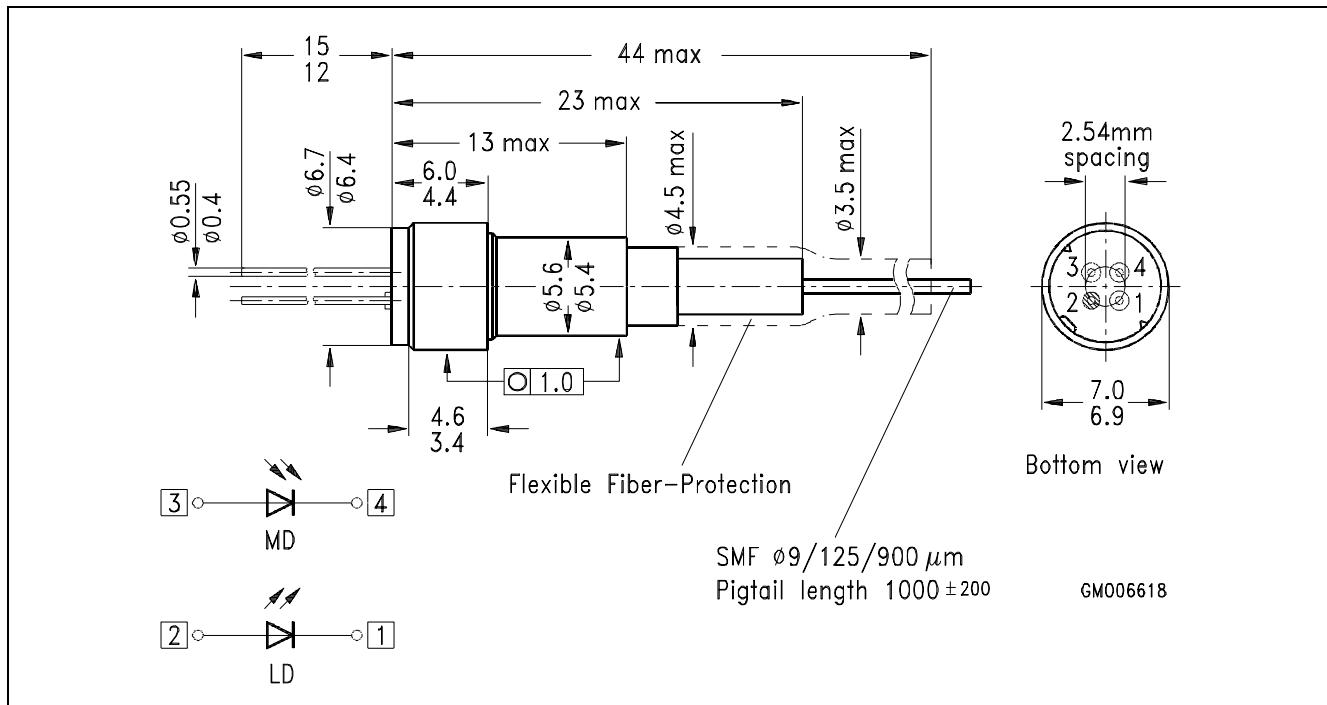

**STH 51004X**

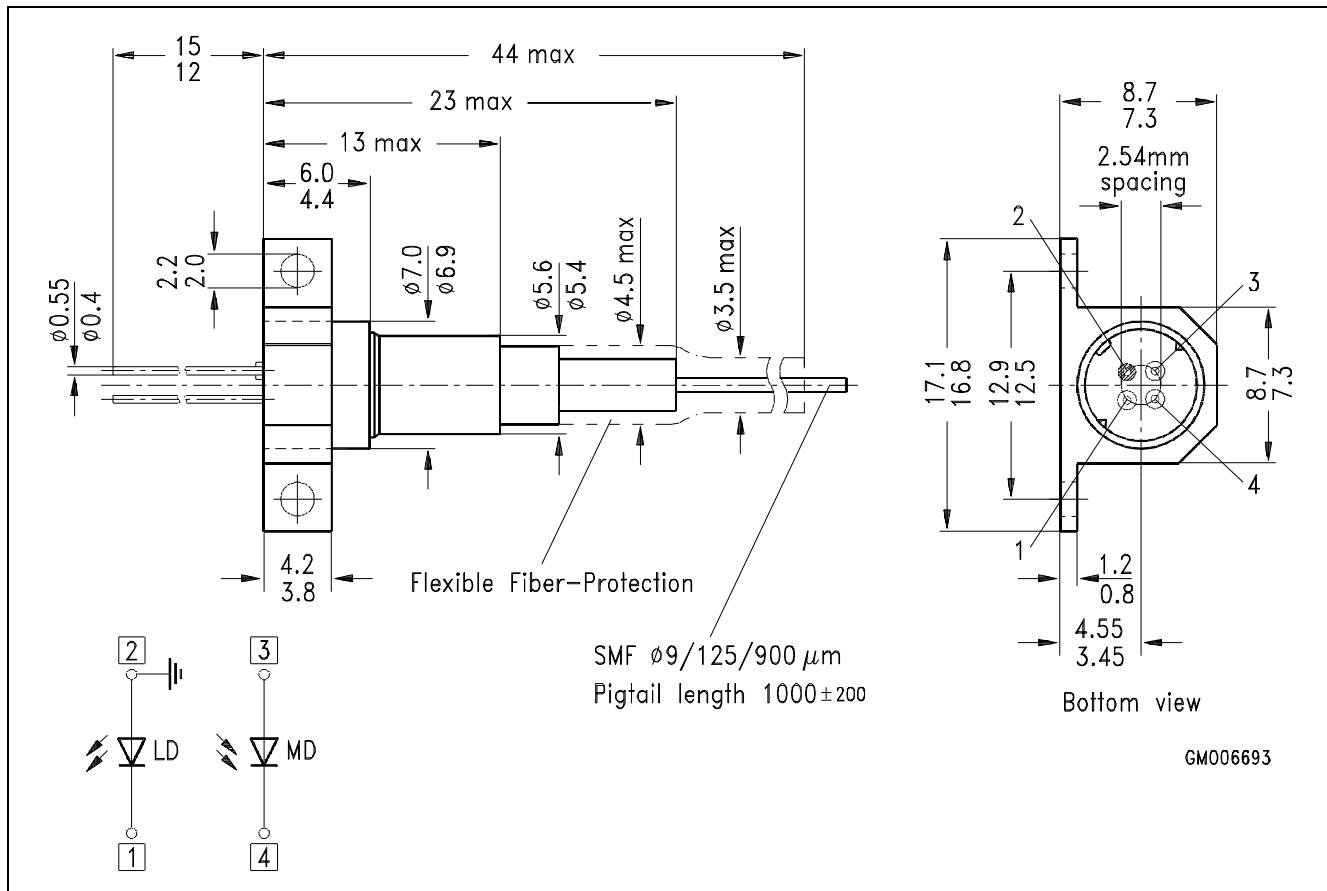

**STH 51005X (with flange)**