

## TURBO 2 ULTRAFAST HIGH VOLTAGE RECTIFIER

### MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	12 A
$V_{RRM}$	600 V
$I_{RM} (\text{typ.})$	7 A
$T_j (\text{max})$	175 °C
$V_F (\text{max})$	1.8 V
$\text{trr} (\text{max})$	45 ns

### FEATURES AND BENEFITS

- Ultrafast switching
- Low reverse recovery current
- Reduces switching losses
- Low thermal resistance


### DESCRIPTION

The STTH12R06D/FP, which is using ST Turbo 2 600V technology, is specially suited as boost diode in continuous mode power factor corrections and hard switching conditions.

The device is also intended for use as a free wheeling diode in power supplies and other power switching applications.

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		600	V
$I_{F(\text{RMS})}$	RMS forward current		30	A
$I_{F(\text{AV})}$	Average forward current		12	A
$I_{FSM}$	Surge non repetitive forward current	tp = 10 ms Sinusoidal	100	A
$T_{\text{stg}}$	Storage temperature range		- 65 + 175	°C
$T_j$	Maximum operating junction temperature		+ 175	°C

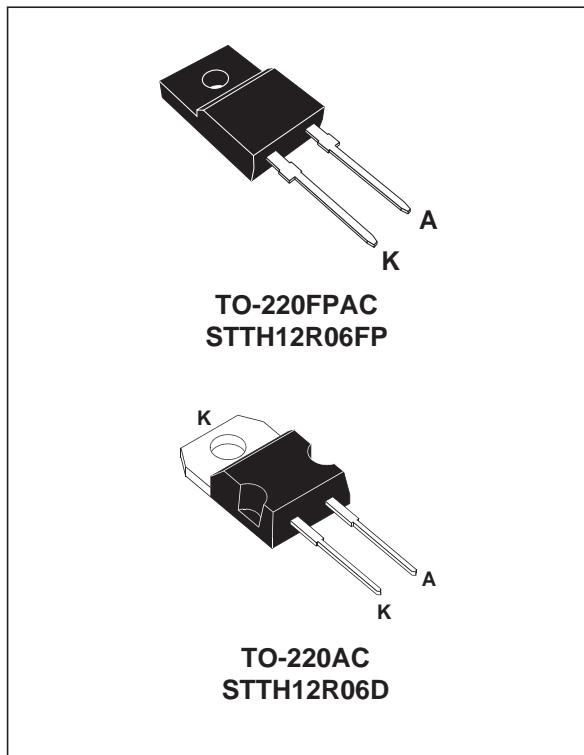

## STTH12R06D/FP

### THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
$R_{th(j-c)}$	Junction to case	TO-220AC	1.7	°C/W
		TO-220FPAC	4.4	

### STATIC ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
$I_R$	Reverse leakage current	$V_R = 600V$	$T_j = 25^\circ C$			45	$\mu A$
			$T_j = 125^\circ C$		50	600	
$V_F$	Forward voltage drop	$I_F = 12 A$	$T_j = 25^\circ C$			2.9	V
			$T_j = 125^\circ C$		1.4	1.8	

To evaluate the maximum conduction losses use the following equation :  
 $P = 1.16 \times I_F(AV) + 0.053 I_F^2(\text{RMS})$


### DYNAMIC ELECTRICAL CHARACTERISTICS

Symbol	Tests conditions		Min.	Typ.	Max.	Unit	
trr	$I_F = 0.5 A$ $I_{rr} = 0.25 A$ $I_R = 1A$		$T_j = 25^\circ C$			25	ns
	$I_F = 1 A$ $dI_F/dt = -50 A/\mu s$ $V_R = 30V$					45	
$I_{RM}$	$V_R = 400 V$ $I_F = 12A$ $dI_F/dt = -200A/\mu s$		$T_j = 125^\circ C$		7.0	8.4	A
S factor					0.2		
Qrr					180		nC
tfr	$I_F = 12 A$ $dI_F/dt = 96 A/\mu s$ $V_{FR} = 1.1 \times V_{Fmax}$		$T_j = 25^\circ C$			200	ns
$V_{FP}$						5.5	V


**Fig. 1:** Conduction losses versus average current.

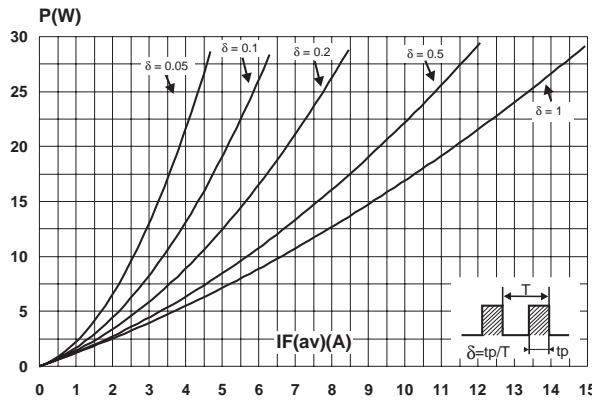


**Fig. 3-1:** Relative variation of thermal impedance junction to case versus pulse duration (TO-220AC).

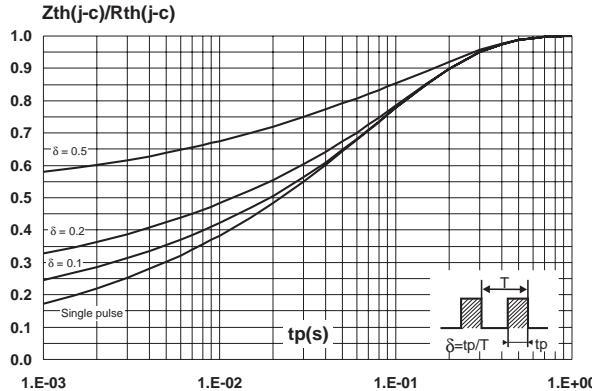


**Fig. 4:** Peak reverse recovery current versus  $dI_F/dt$  (90% confidence).

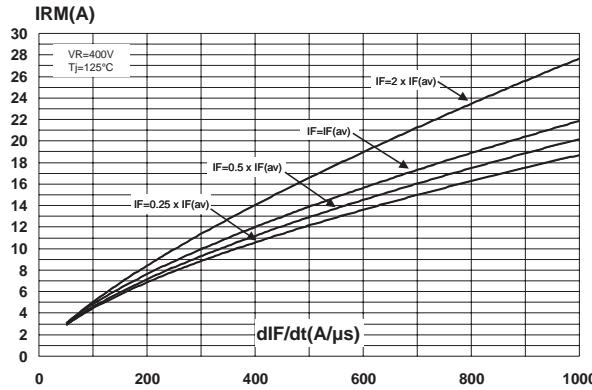


**Fig. 2:** Forward voltage drop versus forward current.

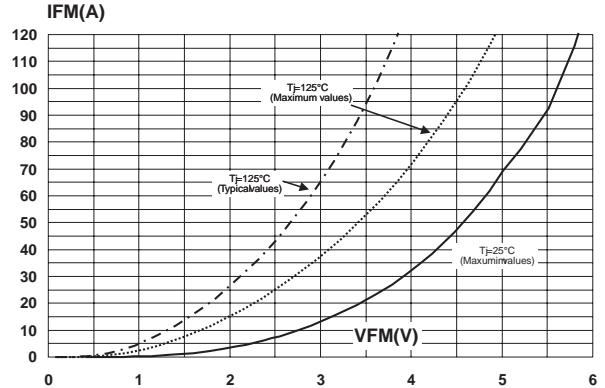

**Fig. 3-2:** Relative variation of thermal impedance junction to case versus pulse duration (TO-220FPAC).

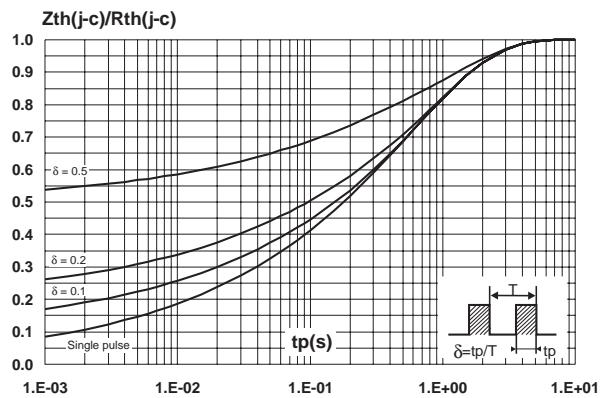


**Fig. 5:** Reverse recovery time versus  $dI_F/dt$  (90% confidence).

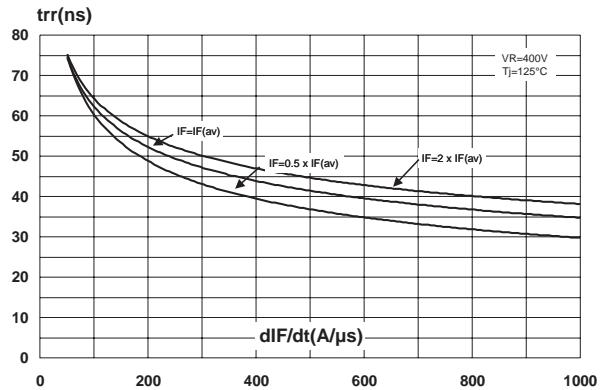


## STTH12R06D/FP


**Fig. 6:** Reverse recovery charges versus  $dI_F/dt$  (90% confidence).

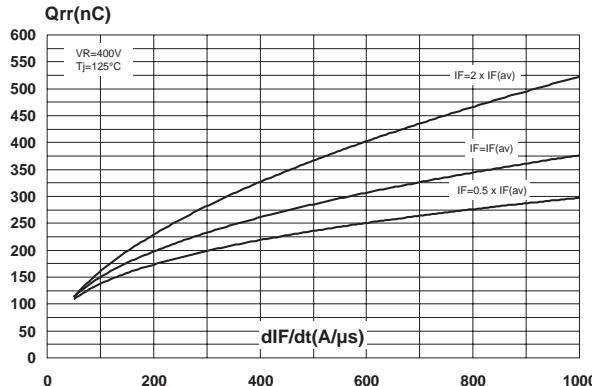


**Fig. 7:** Softness factor versus  $dI_F/dt$  (typical values).

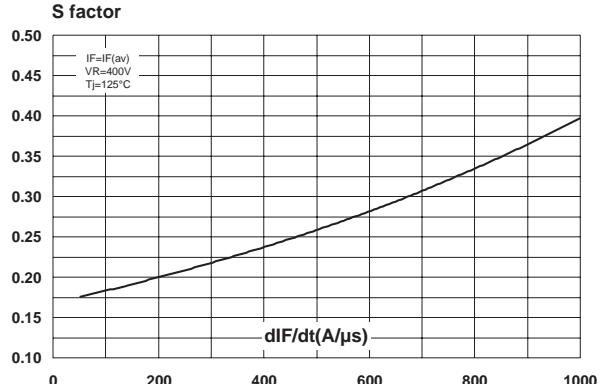


**Fig. 8:** Relative variation of dynamic parameters versus junction temperature.

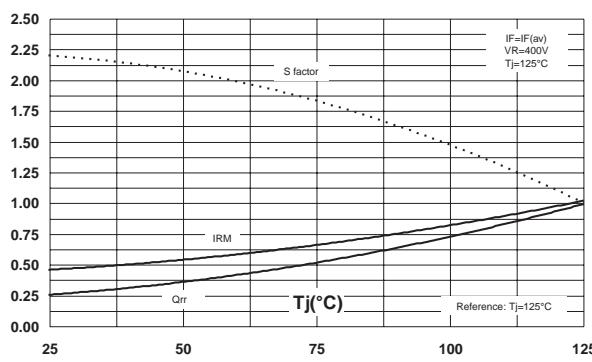


**Fig. 9:** Transient peak forward voltage versus  $dI_F/dt$  (90% confidence).

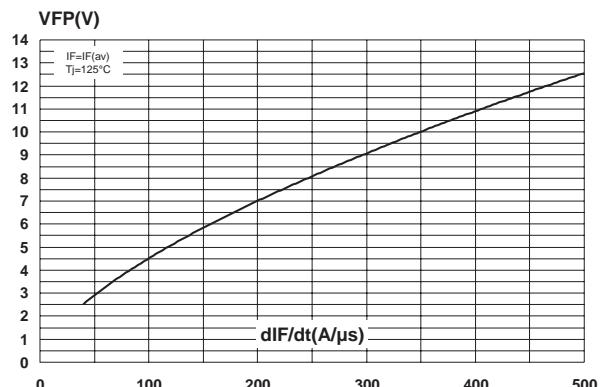

**Fig. 10:** Forward recovery time versus  $dI_F/dt$  (90% confidence).

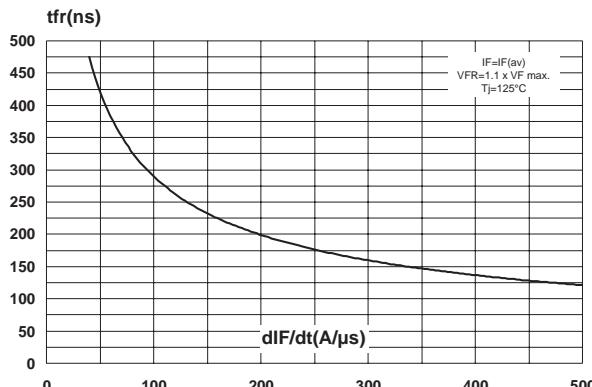

**Fig. 11:** Junction capacitance versus reverse voltage applied (typical values).

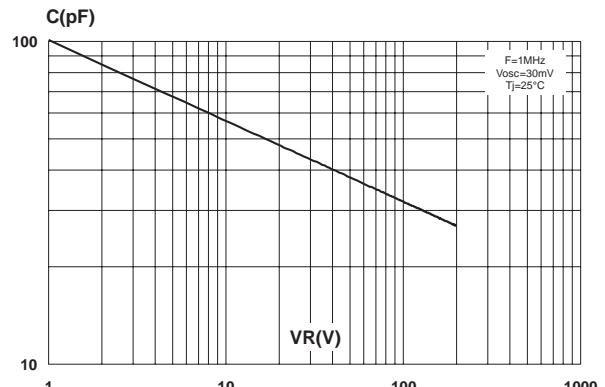

**PACKAGE MECHANICAL DATA**  
TO-220FPAC

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.4	4.6	0.173	0.181
B	2.5	2.7	0.098	0.106
D	2.5	2.75	0.098	0.108
E	0.45	0.70	0.018	0.027
F	0.75	1	0.030	0.039
F1	1.15	1.70	0.045	0.067
G	4.95	5.20	0.195	0.205
G1	2.4	2.7	0.094	0.106
H	10	10.4	0.393	0.409
L2	16 Typ.		0.63 Typ.	
L3	28.6	30.6	1.126	1.205
L4	9.8	10.6	0.386	0.417
L5	2.9	3.6	0.114	0.142
L6	15.9	16.4	0.626	0.646
L7	9.00	9.30	0.354	0.366
Dia.	3.00	3.20	0.118	0.126

**PACKAGE MECHANICAL DATA**  
TO-220AC

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.40	4.60	0.173	0.181
C	1.23	1.32	0.048	0.051
D	2.40	2.72	0.094	0.107
E	0.49	0.70	0.019	0.027
F	0.61	0.88	0.024	0.034
F1	1.14	1.70	0.044	0.066
G	4.95	5.15	0.194	0.202
H2	10.00	10.40	0.393	0.409
L2	16.40 typ.		0.645 typ.	
L4	13.00	14.00	0.511	0.551
L5	2.65	2.95	0.104	0.116
L6	15.25	15.75	0.600	0.620
L7	6.20	6.60	0.244	0.259
L9	3.50	3.93	0.137	0.154
M	2.6 typ.		0.102 typ.	
Diam. I	3.75	3.85	0.147	0.151

## STTH12R06D/FP

---

Ordering code	Marking	Package	Weight	Base qty	Delivery mode
STTH12R06D	STTH12R06D	TO-220AC	1.9 g	50	Tube
STTH12R06FP	STTH12R06FP	TO-220FPAC	1.7 g	50	Tube

- Cooling method: by conduction (C)
- Recommended torque value (TO-220AC): 0.55 Nm
- Maximum torque value (TO-220AC / TO-220FPAC): 0.7 Nm
- Epoxy meets UL 94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.  
STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany

Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore  
Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>