




TDA7286

SINGLE CHIP PREAMPLIFIER FOR DOUBLE DECK RADIO CASSETTE RECORDER


- HIGH OPEN-LOOP GAIN (80dB)
- VERY LOW INPUT NOISE
- LOW TURN ON/OFF POP
- LOW SUPPLY CURRENT
- PLAYBACK AMPLIFIER WITH HEAD INPUT SWITCH
- RECORDING AMPLIFIER WITH BUILT-IN ALC
- ALC TIME CONSTANT PIN CAN BE USED AS ALC SWITCH
- GOOD SUPPLY RIPPLE REJECTION

DESCRIPTION

The TDA7286 is a monolithic integrated circuit in DIP20 and SO20 packages designed for 6V, 9V and 12V AC/DC double deck cassette applications.

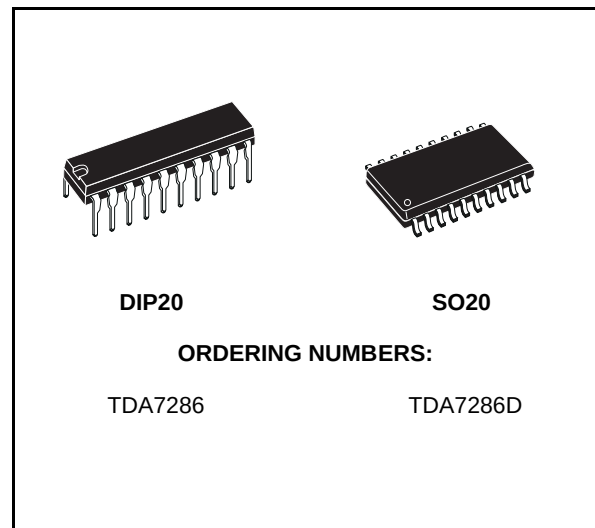


BLOCK DIAGRAM

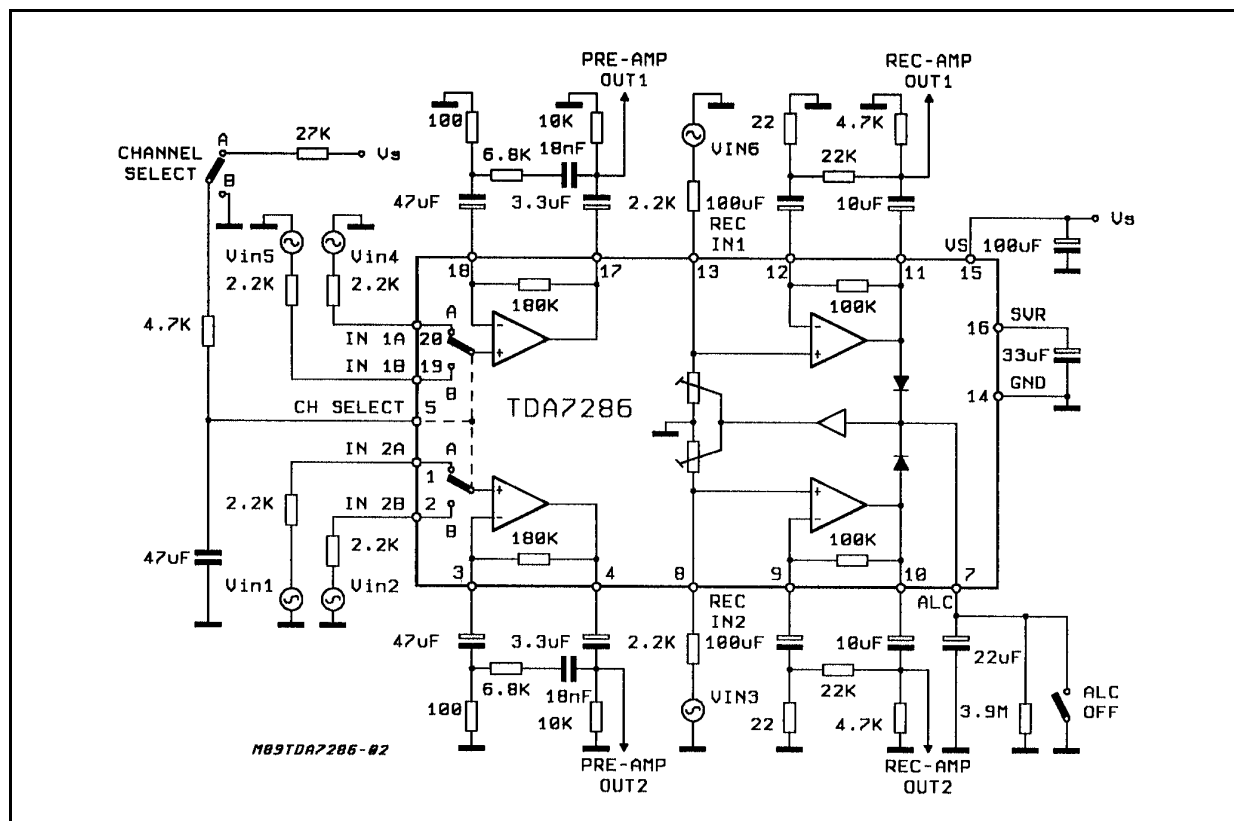

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_S	Supply Voltage	14	V
V_{IN}	Input DC Voltage	-0.4 to 0.5	V
T_{op}	Operating Temperature	-20 to 70	°C
T_{stg}, T_j	Storage & Junction Temperature	-40 to 150	°C

PIN CONNECTION (Top view)

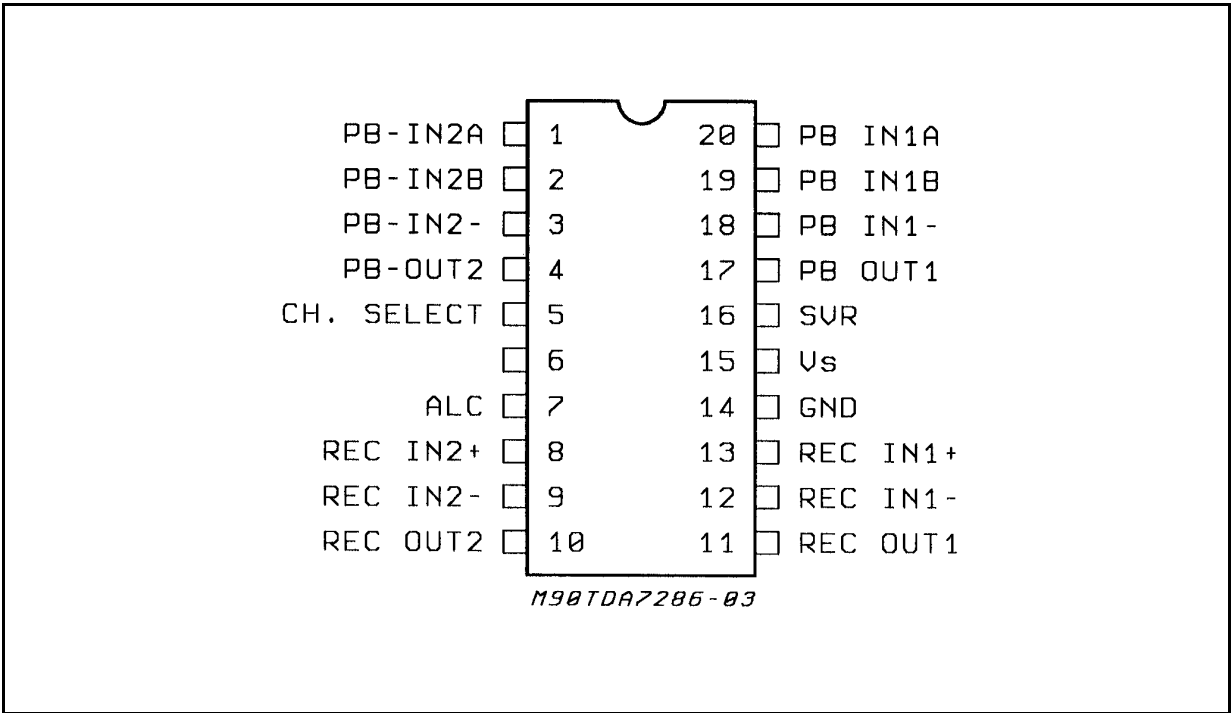

THERMAL DATA


Symbol	Parameter	DIP20	SO20	Unit
$R_{thj-amb}$	Thermal Resistance Junction to Ambient	Max. 100	200	°C/W

ELECTRICAL CHARACTERISTICS ($V_S = 6V$, $T_{amb} = 25^{\circ}C$; $f = 1KHz$; $R_L = 4.7k\Omega$; $R_g = 2.2k\Omega$, unless otherwise specified.)


Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V_S	Supply Voltage		4		12	V
I_d	Quiescent Current			7	15	mA
PLAYBACK AMPLIFIER						
G_{VO}	Open Loop Gain			80		dB
V_{CD}	Output DC Voltage		1.2	1.5	1.7	V
V_O	Output AC Voltage	THD = 1%	700	950		mVrms
SVR	Supply Voltage Rejection	$f = 100Hz$	35	45		dB
C_T	Cross Talk			60		dB
E_N	Total Output Noise	$R_g = 0$, BW = 22 to 22kHz		300		μV
R_E	Internal Feedback Res			180		k Ω
RECORDING AMPLIFIER						
G_{VO}	Open Loop Gain			80		dB
R_i	Input resistance		30	50	70	k Ω
V_{DC}	Output DC Voltage		2.0	2.4	2.8	V
V_O	Output AC Voltage	THD = 1% ALC = OFF ALC = ON	1 0.75	1.4 1	1.25	Vrms Vrms
THD	Total Harmonic Distortion	$V_O = 0.5V_{rms}$; ALC = OFF		0.2	0.5	%
	ALC Range	$\Delta V_O = 3dB$		48		dB
CB	Channel Balance	ALC = ON		0	2	dB
SVR	Supply Voltage Rejection	$f = 100Hz$	28	32		dB
C_T	Cross Talk	$f = 1KHz$		60		dB
HEAD SELECT INPUT						
	Input LOW Level	chB selected			0.6	V
	Input HIGH level	chA selected	1.4			V

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
a1	0.254			0.010		
B	1.39		1.65	0.055		0.065
b		0.45			0.018	
b1		0.25			0.010	
D			25.4			1.000
E		8.5			0.335	
e		2.54			0.100	
e3		22.86			0.900	
F			7.1			0.280
I			3.93			0.155
L		3.3			0.130	
Z			1.34			0.053

OUTLINE AND
MECHANICAL DATA




DIP20

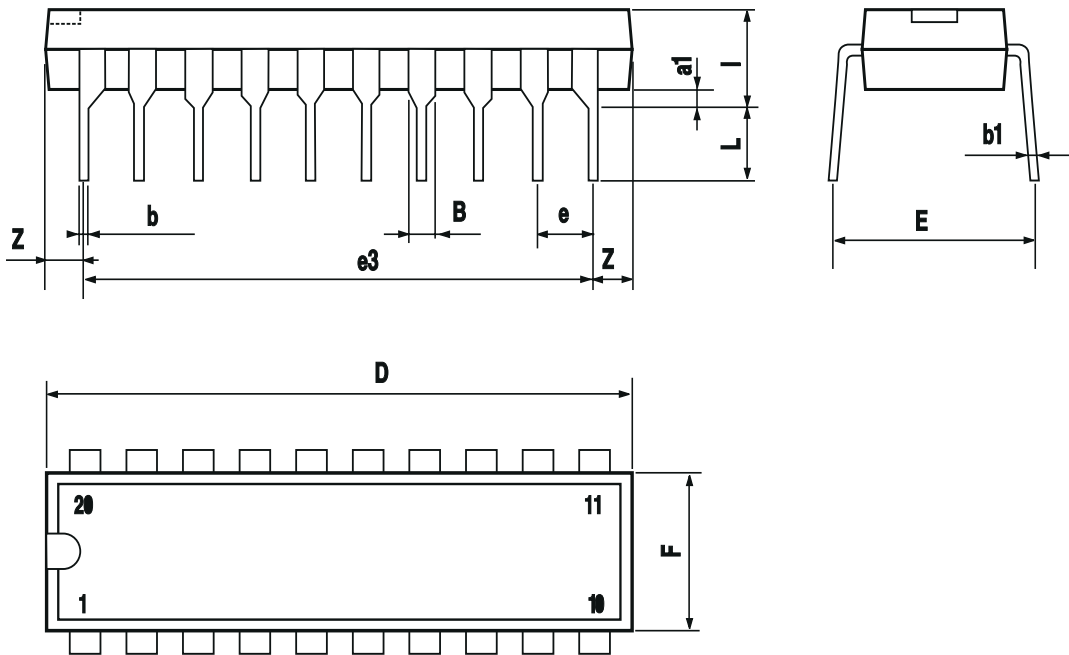


DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	2.35		2.65	0.093		0.104
A1	0.1		0.3	0.004		0.012
B	0.33		0.51	0.013		0.020
C	0.23		0.32	0.009		0.013
D	12.6		13	0.496		0.512
E	7.4		7.6	0.291		0.299
e		1.27			0.050	
H	10		10.65	0.394		0.419
h	0.25		0.75	0.010		0.030
L	0.4		1.27	0.016		0.050
K	0° (min.) 8° (max.)					

OUTLINE AND MECHANICAL DATA



SO20

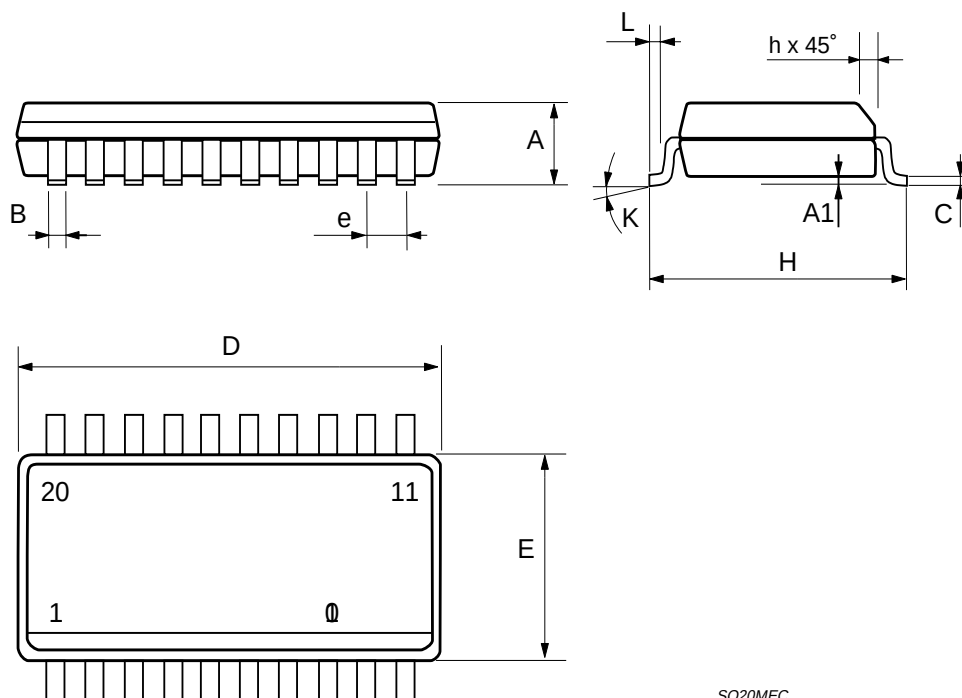

SO20MEC

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2003 STMicroelectronics - All rights reserved

STMicroelectronics GROUP OF COMPANIES

Australia – Belgium - Brazil - Canada - China – Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

www.st.com