

## COMPLEMENTARY SILICON POWER DARLINGTON TRANSISTORS

- SGS-THOMSON PREFERRED SALESTYPES
- COMPLEMENTARY PNP - NPN DEVICES
- INTEGRATED ANTIPARALLEL COLLECTOR-EMITTER DIODE

### APPLICATIONS


- LINEAR AND SWITCHING INDUSTRIAL EQUIPMENT

### DESCRIPTION


The TIP100 and TIP102 are silicon epitaxial-base NPN power transistors in monolithic Darlington configuration mounted in TO-220 plastic package, intended for use in power linear and switching applications.

The complementary PNP types are TIP105 and TIP107 respectively.

Also TIP106 is a PNP type.

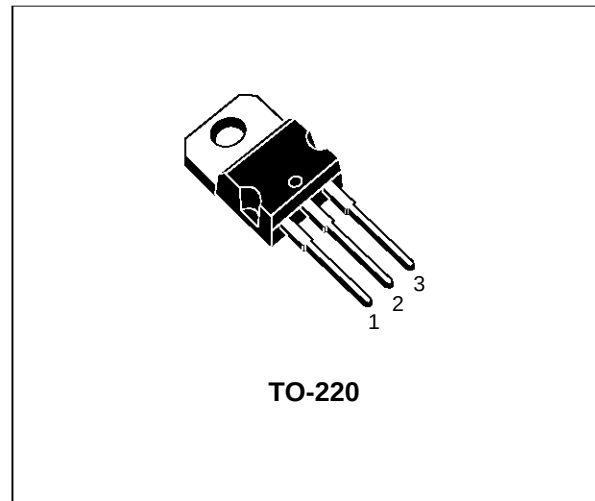

### INTERNAL SCHEMATIC DIAGRAM

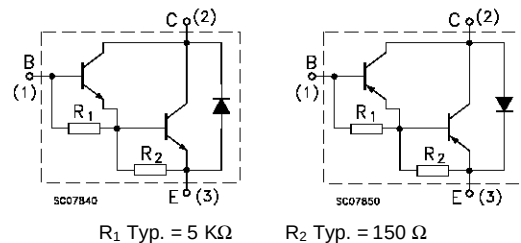

### ABSOLUTE MAXIMUM RATINGS

| Symbol           | Parameter                                                                  | Value |        |            |        | Unit |
|------------------|----------------------------------------------------------------------------|-------|--------|------------|--------|------|
|                  |                                                                            | NPN   | TIP100 |            | TIP102 |      |
|                  |                                                                            | PNP   | TIP105 | TIP106     | TIP107 |      |
| V <sub>CBO</sub> | Collector-Base Voltage (I <sub>E</sub> = 0)                                |       | 60     | 80         | 100    | V    |
| V <sub>CEO</sub> | Collector-Emitter Voltage (I <sub>B</sub> = 0)                             |       | 60     | 80         | 100    | V    |
| V <sub>EBO</sub> | Emitter-Base Voltage (I <sub>C</sub> = 0)                                  |       |        | 5          |        | V    |
| I <sub>C</sub>   | Collector Current                                                          |       |        | 8          |        | A    |
| I <sub>CM</sub>  | Collector Peak Current                                                     |       |        | 15         |        | A    |
| I <sub>B</sub>   | Base Current                                                               |       |        | 1          |        | A    |
| P <sub>tot</sub> | Total Dissipation at T <sub>case</sub> ≤ 25 °C<br>T <sub>amb</sub> ≤ 25 °C |       |        | 80         |        | W    |
|                  |                                                                            |       |        | 2          |        | W    |
| T <sub>stg</sub> | Storage Temperature                                                        |       |        | -65 to 150 |        | °C   |
| T <sub>j</sub>   | Max. Operating Junction Temperature                                        |       |        | 150        |        | °C   |

\* For PNP types voltage and current values are negative.

## TIP100/TIP102/TIP105/TIP106/TIP107

### THERMAL DATA


|                       |                                     |     |      |      |
|-----------------------|-------------------------------------|-----|------|------|
| R <sub>thj-case</sub> | Thermal Resistance Junction-case    | Max | 1.56 | °C/W |
| R <sub>thj-amb</sub>  | Thermal Resistance Junction-ambient | Max | 62.5 | °C/W |

### ELECTRICAL CHARACTERISTICS (T<sub>case</sub> = 25 °C unless otherwise specified)

| Symbol                  | Parameter                                                 | Test Conditions                                                                                                                                 | Min.            | Typ. | Max.           | Unit           |
|-------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|----------------|----------------|
| I <sub>CEO</sub>        | Collector Cut-off Current (I <sub>B</sub> = 0)            | for <b>TIP100/TIP105</b> V <sub>CE</sub> = 30 V<br>for <b>TIP106</b> V <sub>CE</sub> = 40 V<br>for <b>TIP102/TIP107</b> V <sub>CE</sub> = 50 V  |                 |      | 50<br>50<br>50 | μA<br>μA<br>μA |
| I <sub>CBO</sub>        | Collector Cut-off Current (I <sub>E</sub> = 0)            | for <b>TIP100/TIP105</b> V <sub>CE</sub> = 60 V<br>for <b>TIP106</b> V <sub>CE</sub> = 80 V<br>for <b>TIP102/TIP107</b> V <sub>CE</sub> = 100 V |                 |      | 50<br>50<br>50 | μA<br>μA<br>μA |
| I <sub>EBO</sub>        | Emitter Cut-off Current (I <sub>C</sub> = 0)              | V <sub>EB</sub> = -5 V                                                                                                                          |                 |      | 8              | mA             |
| V <sub>CEO(sus)</sub> * | Collector-Emitter Sustaining Voltage (I <sub>B</sub> = 0) | I <sub>C</sub> = 30 mA<br>for <b>TIP100/TIP105</b><br>for <b>TIP106</b><br>for <b>TIP102/TIP107</b>                                             | 60<br>80<br>100 |      |                | V<br>V<br>V    |
| V <sub>CE(sat)</sub> *  | Collector-Emitter Saturation Voltage                      | I <sub>C</sub> = 3 A I <sub>B</sub> = 6 mA<br>I <sub>C</sub> = 8 A I <sub>B</sub> = 80 mA                                                       |                 |      | 2<br>2.5       | V<br>V         |
| V <sub>BE</sub> *       | Base-Emitter Voltage                                      | I <sub>C</sub> = 8 A V <sub>CE</sub> = 4 V                                                                                                      |                 |      | 2.8            | V              |
| h <sub>FE</sub> *       | DC Current Gain                                           | I <sub>C</sub> = 3 A V <sub>CE</sub> = 4 V<br>I <sub>C</sub> = 8 A V <sub>CE</sub> = 4 V                                                        | 1000<br>200     |      | 20000          |                |
| V <sub>F</sub> *        | Forward Voltage of Commutation Diode (I <sub>B</sub> = 0) | I <sub>F</sub> = - I <sub>C</sub> = 10 A                                                                                                        |                 |      | 2.8            | V              |


\* For PNP types voltage and current values are negative.

### Safe Operating Area

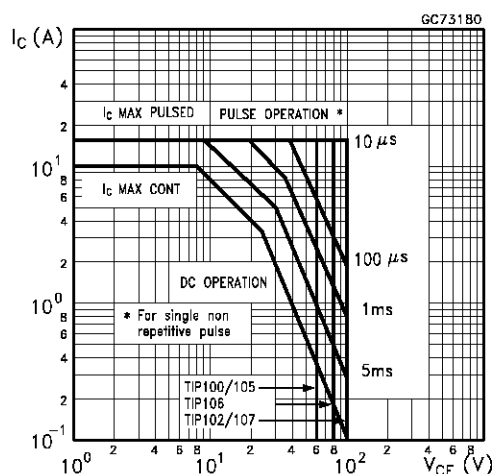

## TO-220 MECHANICAL DATA

| DIM. | mm    |      |       | inch  |       |       |
|------|-------|------|-------|-------|-------|-------|
|      | MIN.  | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40  |      | 4.60  | 0.173 |       | 0.181 |
| C    | 1.23  |      | 1.32  | 0.048 |       | 0.051 |
| D    | 2.40  |      | 2.72  | 0.094 |       | 0.107 |
| D1   |       | 1.27 |       |       | 0.050 |       |
| E    | 0.49  |      | 0.70  | 0.019 |       | 0.027 |
| F    | 0.61  |      | 0.88  | 0.024 |       | 0.034 |
| F1   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| F2   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| G    | 4.95  |      | 5.15  | 0.194 |       | 0.203 |
| G1   | 2.4   |      | 2.7   | 0.094 |       | 0.106 |
| H2   | 10.0  |      | 10.40 | 0.393 |       | 0.409 |
| L2   |       | 16.4 |       |       | 0.645 |       |
| L4   | 13.0  |      | 14.0  | 0.511 |       | 0.551 |
| L5   | 2.65  |      | 2.95  | 0.104 |       | 0.116 |
| L6   | 15.25 |      | 15.75 | 0.600 |       | 0.620 |
| L7   | 6.2   |      | 6.6   | 0.244 |       | 0.260 |
| L9   | 3.5   |      | 3.93  | 0.137 |       | 0.154 |
| DIA. | 3.75  |      | 3.85  | 0.147 |       | 0.151 |

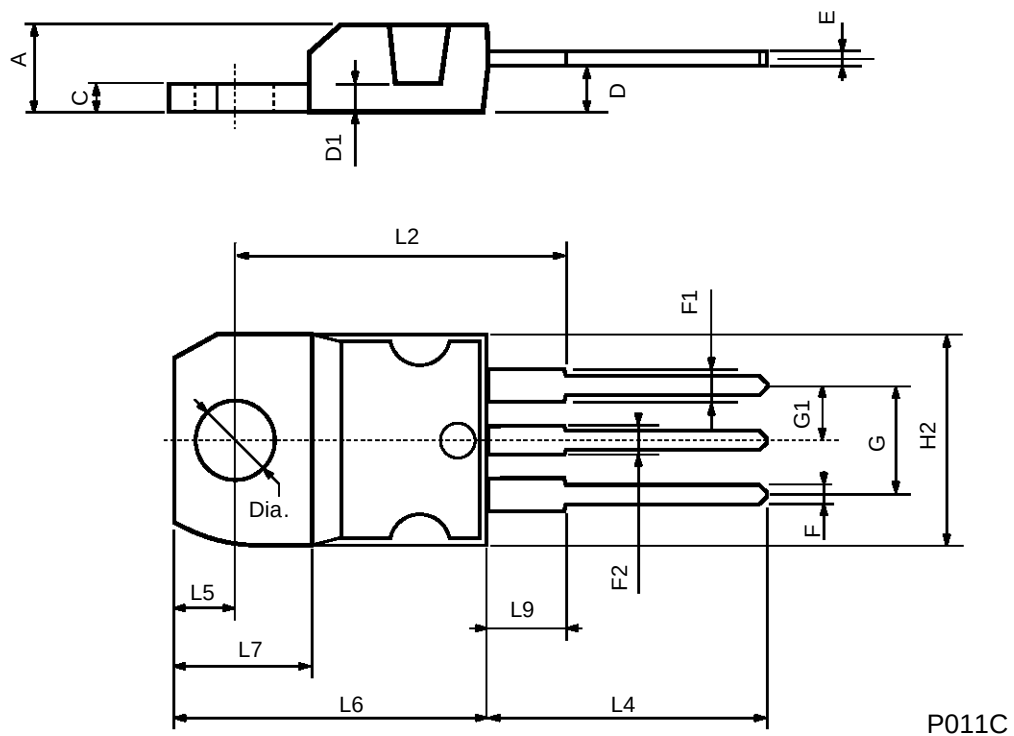

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES  
Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A  
...