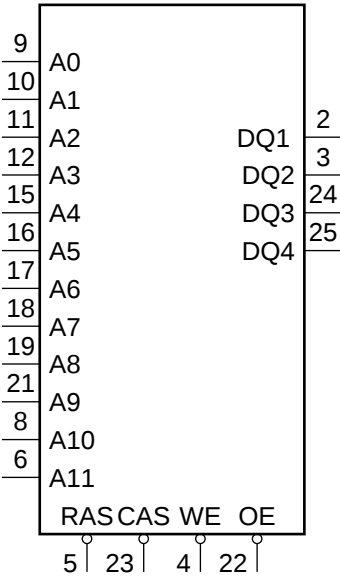
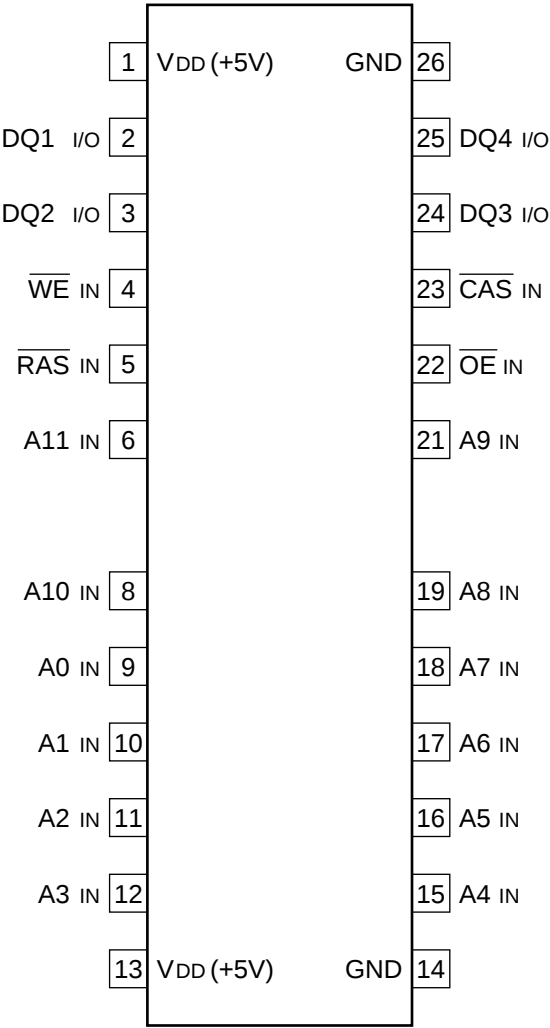

C-MOS 16M(4,194,304x4)-BIT DYNAMIC RANDOM-ACCESS MEMORIES
- TOP VIEW -



A0-A11 ; ADDRESS INPUTS
CAS ; COLUMN ADDRESS STROBE INPUT
DQ1-DQ4 ; DATA INPUTS/OUTPUTS
OE ; OUTPUT ENABLE INPUT
RAS ; ROW ADDRESS STROBE INPUT
WE ; WRITE ENABLE INPUT

