

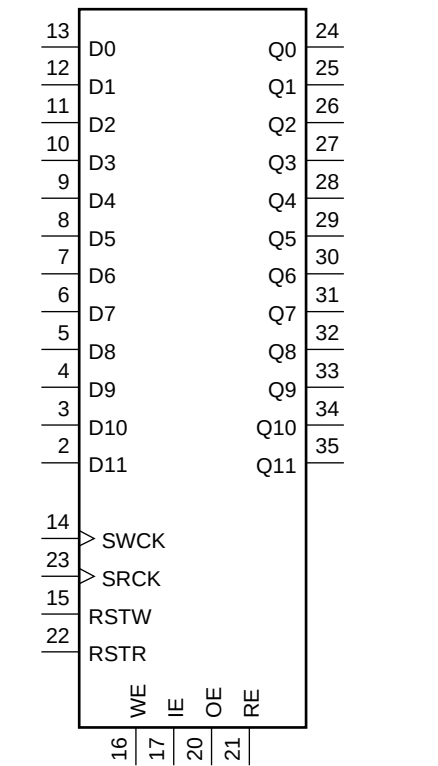


C-MOS 2.9 M (245,760-WORD × 12) BITS FIELD MEMORY

—TOP VIEW—

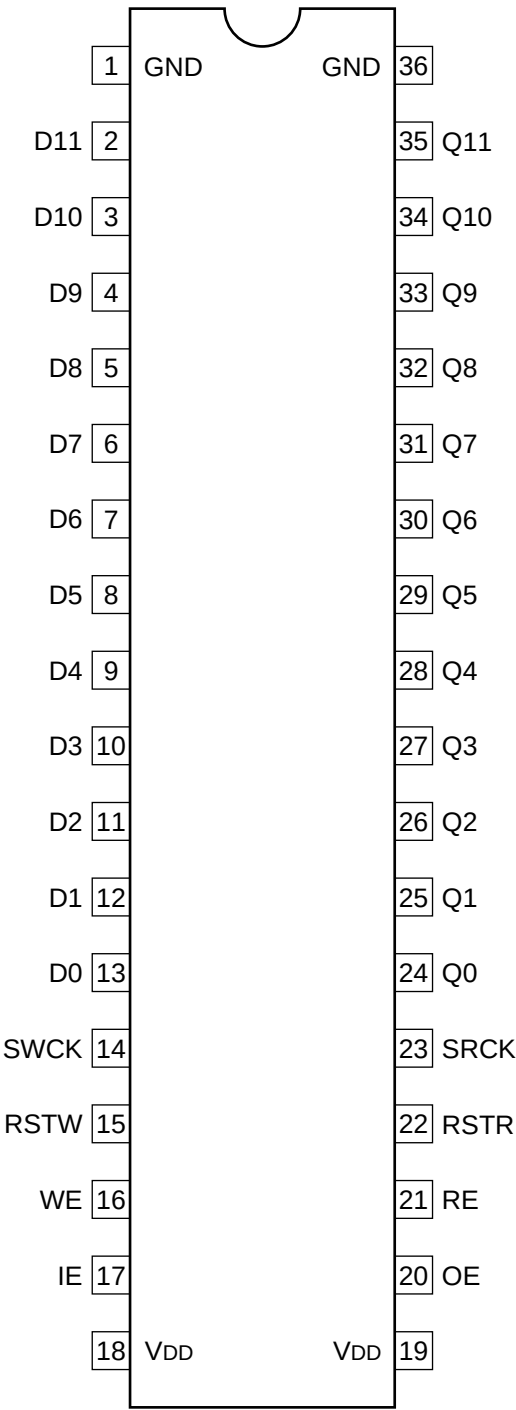

- INPUT
- D0 - D11 : DATA INPUTS
- IE : INPUT ENABLE
- OE : OUTPUT ENABLE
- RE : READ ENABLE
- RSTR : RESET READ
- RSTW : RESET WRITE
- SRCK : SERIAL READ CLOCK
- SWCK : SERIAL WRITE CLOCK
- WE : WRITE ENABLE
- OUTPUT
- Q0 - Q11 : DATA OUTPUTS

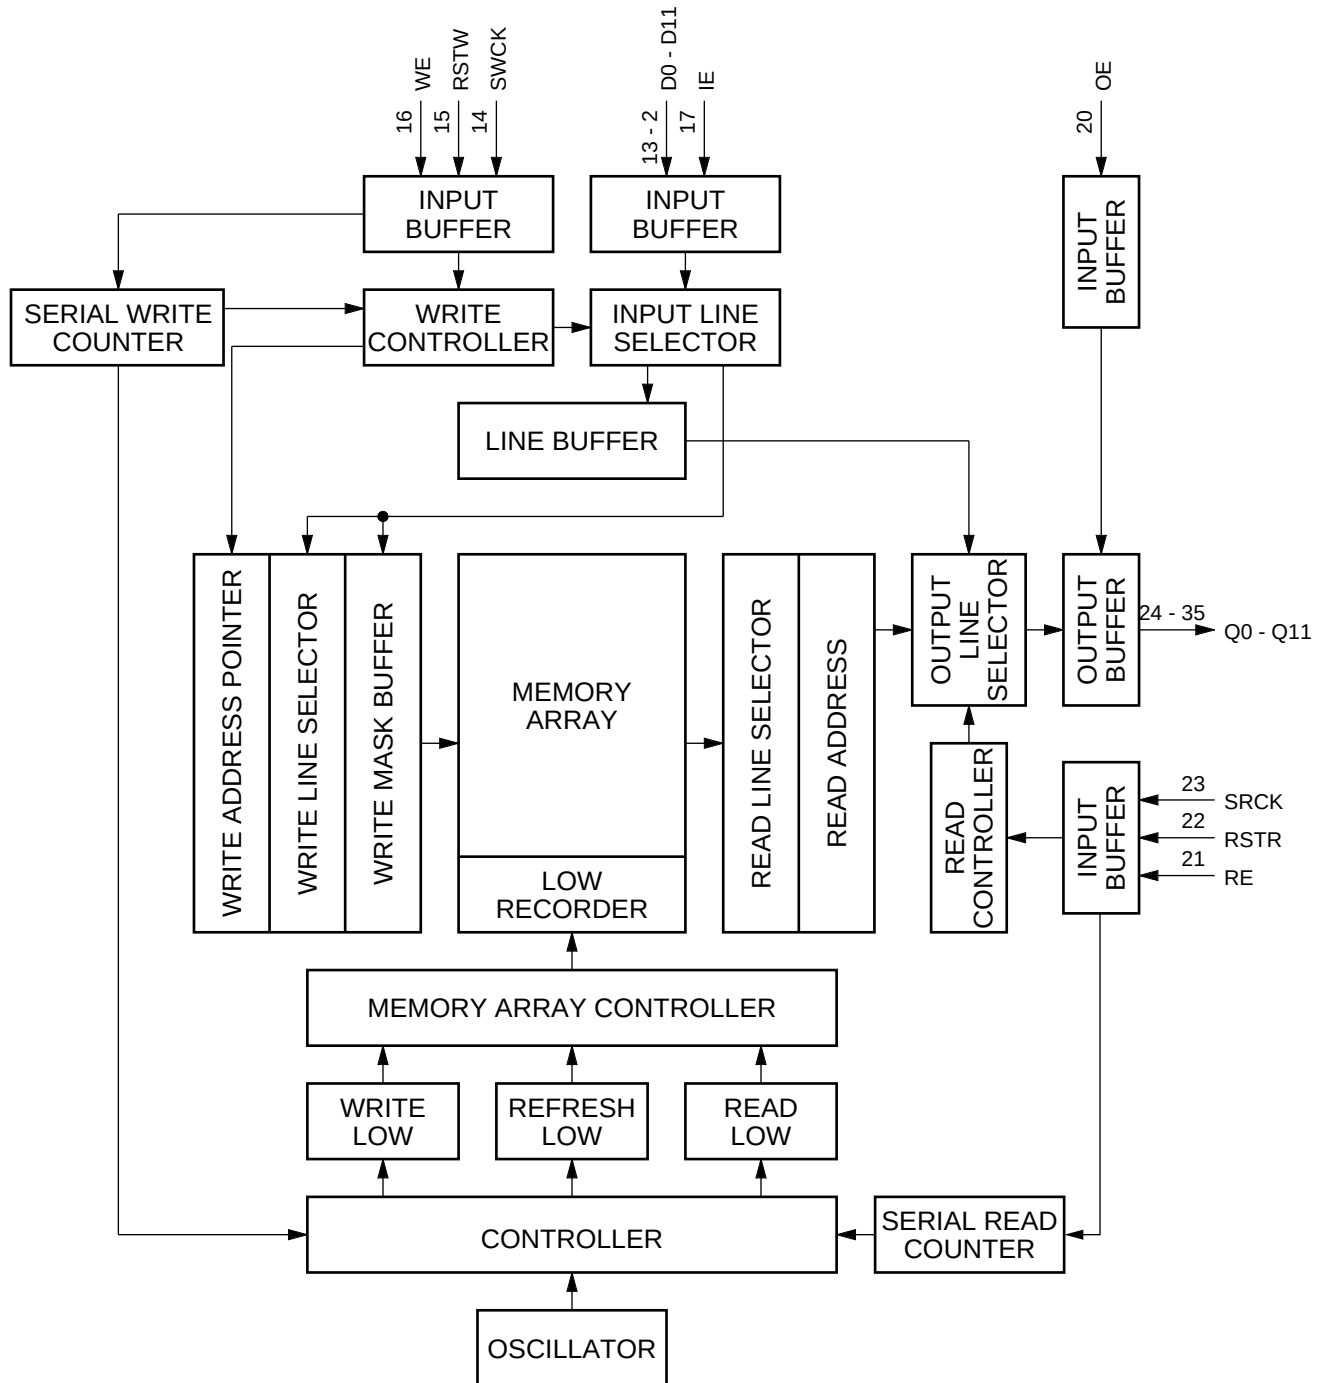

NOTE :
TMS4C2972 AND TMS4C2973 ALLOW BLOCK RANDOM ACCESS.