

UTC UC723 LINEAR INTEGRATED CIRCUIT


ADJUSTABLE VOLTAGE REGULATOR

DESCRIPTION

The UTC UC723 is a silicon monolithic integrated circuit, designed for service as voltage regulator at output voltages, ranging from 2V to 37V at current up to 150mA. It includes a temperature-compensated reference amplifier, an error amplifier, a power series pass transistor, and a current-limiting circuit.


FEATURES

- *Up to 150mA output current
- *Adjustable output voltage (from 2V to 37V)
- *Positive and negative voltage regulation
- *Regulation in excess of 10A with suitable pass transistors
- *Input and output short-circuit protection
- *Load and line regulation < 0.03%

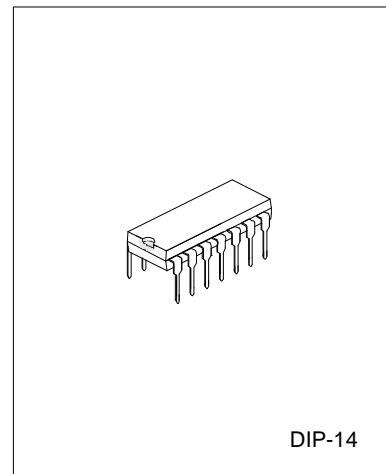

DIP-14

BLOCK DIAGRAM

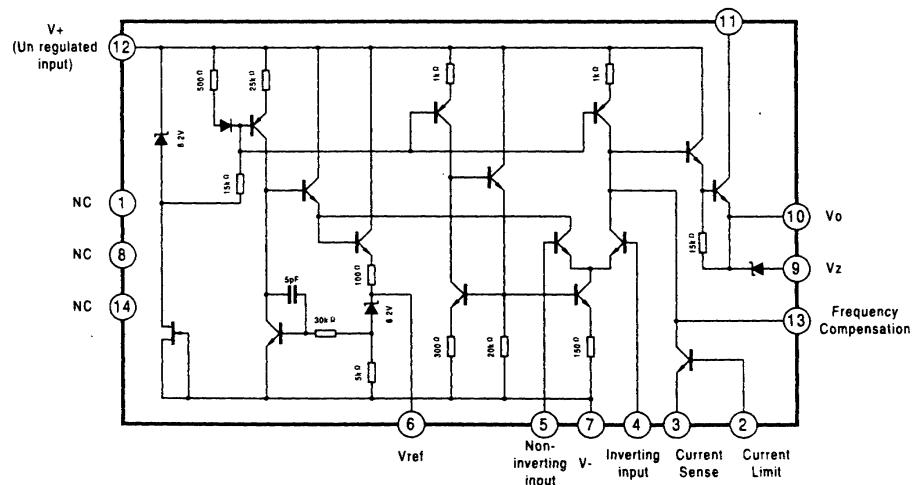

UTC UC723 LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage(between V+ and V-)	V _{cc}	40	V
Pulse Voltage for 50ms	V _{pulse}	50	V
Differential Input-Output Voltage	V _d	40	V
Different Input Voltage (Between inverting and non-inverting inputs)	V _{id}	+5	V
Different Input Voltage (Between Non-inverting Input and V-)	V _{id}	8	V
Current from Zener Diode Terminal	I _z	25	mA
Power Dissipation	P _d	900	mW
Operating Temperature	T _{opr}	-55 ~ 125	°C
Storage Temperature	T _{str}	-65 ~ 150	°C

ELECTRICAL CHARACTERISTICS(T_a=25°C, V+=V_c=V_i=12V, V_o=5V, I_L=1mA, C₁=100pF, C_{ref}=0, R_{scp}=0, unless otherwise specified, divider impedance R₁*R₂/(R₁+R₂) at non-inverting input, terminal 5=10KΩ)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Quiescent Regulator Current	I _{CCQ}	I _L =0, V _I =30V		2.3	3.5	mA
Input Voltage Range	V _I		9.5		40	V
Output Voltage Range	V _O		2		37	V
Differential Input-Output Voltage	V _I -V _O		3		38	V
Reference Voltage	V _{REF}		6.95	7.15	7.35	V
Line Regulation (note 1)	ΔV _O	V _I =12V to 40V V _I =12V to 15V V _I =12V to 15V, T _a =-55~125°C		0.02 0.01	0.2 0.1	%V _O
Load Regulation (note 1)	ΔV _O	I _L =1mA TO 50mA I _L =1mA TO 50mA, T _a =-55~125°C		0.03	0.15 0.6	%V _O
Output Voltage Temperature Coefficient	ΔV _O	T _a =-55~125°C		0.002	0.015	%/°C
Ripple Rejection (note 2)	R _R	f=50Hz to 10KHz f=50Hz to 10KHz, C _{ref} =5μF T _{min} <T _{typ} <T _{max}		74 86 2.5		dB
Short Circuit Limiting Current	I _{LIM}	R _{scp} =10Ω, V _O =0		65		mA
Equivalent Noise RMS output Voltage (note 2)	V _N	BW=100Hz to 10KHz, C _{ref} =0 BW=100Hz to 10KHz, C _{ref} =5μF		-20 2.5		μV

NOTE 1: Line and load regulation specifications are given for conditions of a constant chip temperature. For high dissipation condition, temperature drifts must be separately taken in account.

NOTE 2: For C_{ref}, see Fig. 1


UTC UC723 LINEAR INTEGRATED CIRCUIT

APPLICATION CIRCUIT

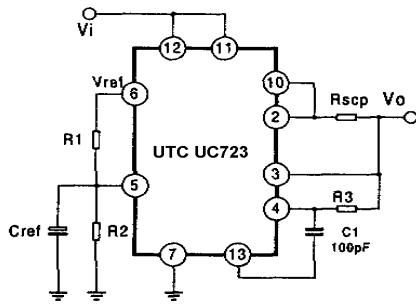


Regulator Output Voltage=5V
 Line Regulation($\Delta V_i=3V$)=0.5mV
 Load regulation ($\Delta I_L=50mA$)=1.5mV
 Note $R3=R1 \cdot R2 / (R1+R2)$ for Minimum temperature drift

Fig. 1 Low Voltage Regulator circuit($V_o=2V$ to $7V$)

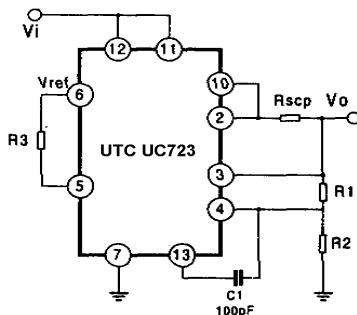


Regulator Output Voltage=5V
 Line Regulation($\Delta V_i=3V$)=1.5mV
 Load regulation ($\Delta I_L=50mA$)=4.5mV
 Note $R3=R1 \cdot R2 / (R1+R2)$ for Minimum temperature drift

Fig. 2 High Voltage Regulator circuit($V_o=7V$ to $37V$)

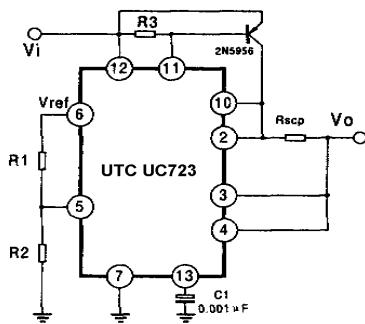

Regulator Output Voltage=5V
 Line Regulation($\Delta V_i=3V$)=0.5mV
 Load regulation ($\Delta I_L=1A$)=5mV

Fig. 3 Positive Voltage regulator Circuit
 (with external p-n-p pass transistor)

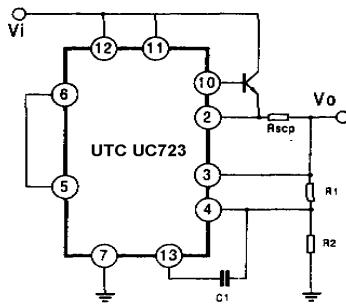

Regulator Output Voltage=15V
 Line Regulation($\Delta V_i=3V$)=1.5mV
 Load regulation ($\Delta I_L=1A$)=15mV

Fig. 4 Positive Voltage regulator Circuit
 (with external n-p-n pass transistor)

UTC UC723 LINEAR INTEGRATED CIRCUIT

TYPICAL PERFORMANCE CHARACTERISTICS

