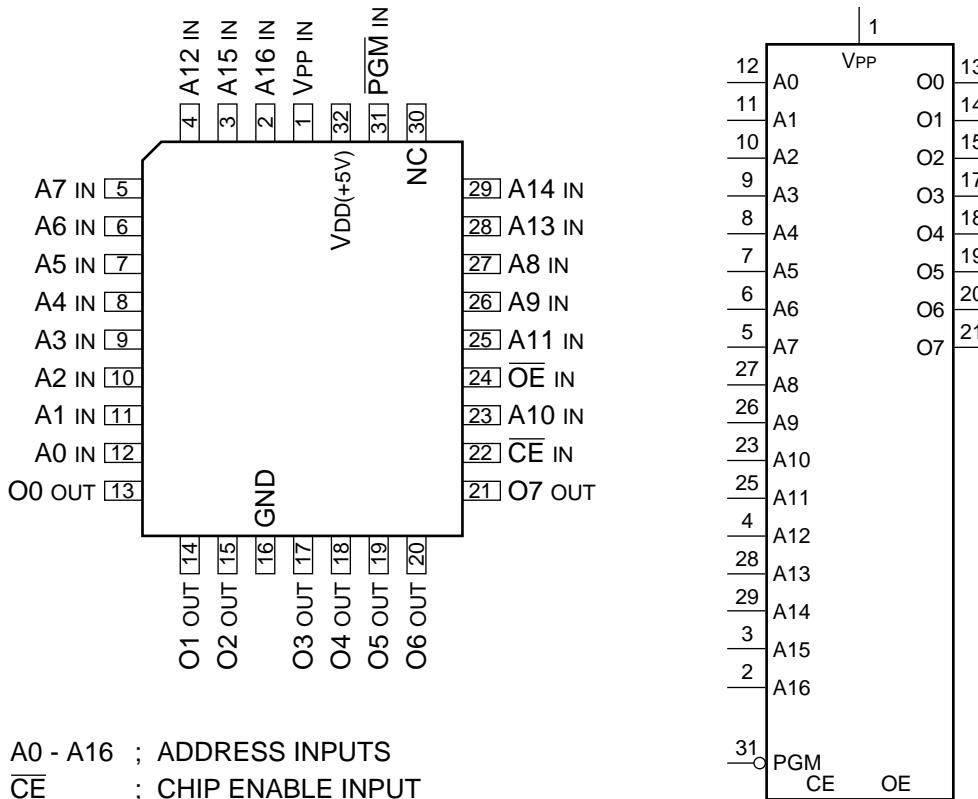

C-MOS 128K 8-BIT HIGH SPEED UV EPROM

-TOP VIEW-



A0 - A16 ; ADDRESS INPUTS
 CE ; CHIP ENABLE INPUT
 OE ; OUTPUT ENABLE INPUT
 O0 - O7 ; DATA OUTPUTS
 PGM ; PROGRAM INPUT

A0	A9	CE	OE	OUTPUTS	PGM	VCC	VPP	FUNCTION
X	X	0	0	DATA OUT	X	5.0V	X	READ
X	X	X	1	HI-Z	X	5.0V	X	OUTPUT DISABLE
X	X	1	X	HI-Z	X	5.0V	X	STANDBY
X	X	0	1	DATA IN	0	6.25V	VPP	PROGRAMMING
X	X	0	0	DATA OUT	1	6.25V	VPP	PROGRAM VERIFY
X	X	1	X	HI-Z	X	5.0V	VPP	PROGRAM INHIBIT

0 ; LOW LEVEL

1 ; HIGH LEVEL

X ; DON'T CARE

HI-Z ; HIGH IMPEDANCE

VPP ; PROGRAM POWER SUPPLY (12.75 ± 0.25V)