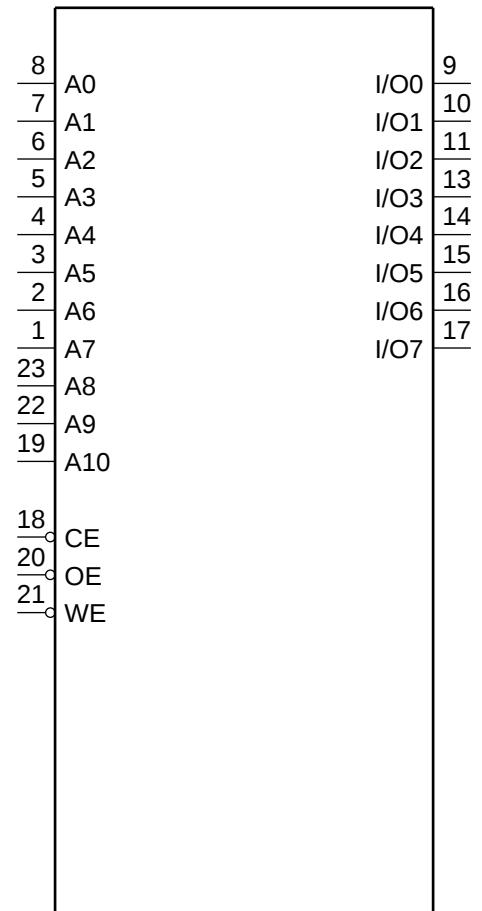
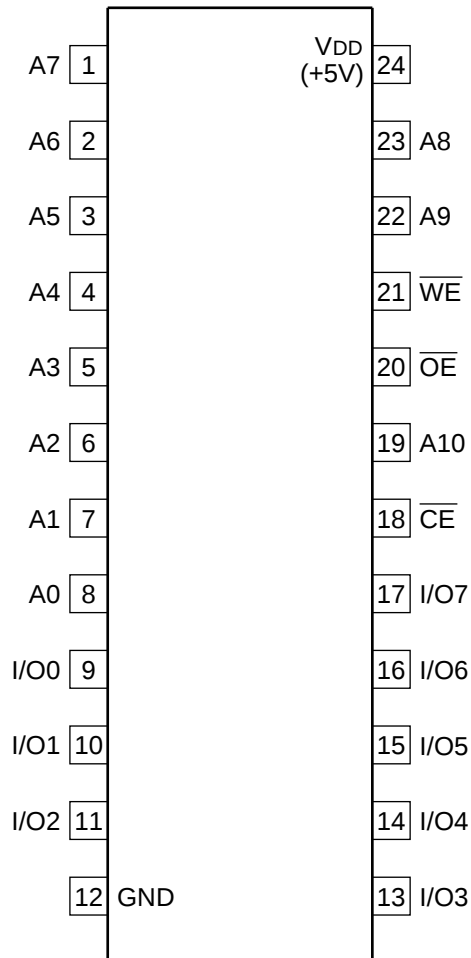

XL28C16A (1/2)

IL08

C-MOS 2K(2048 x 8)-BIT ELECTRIC ERASABLE PROM

- TOP VIEW -



INPUT

A0-A10 ; ADDRESS

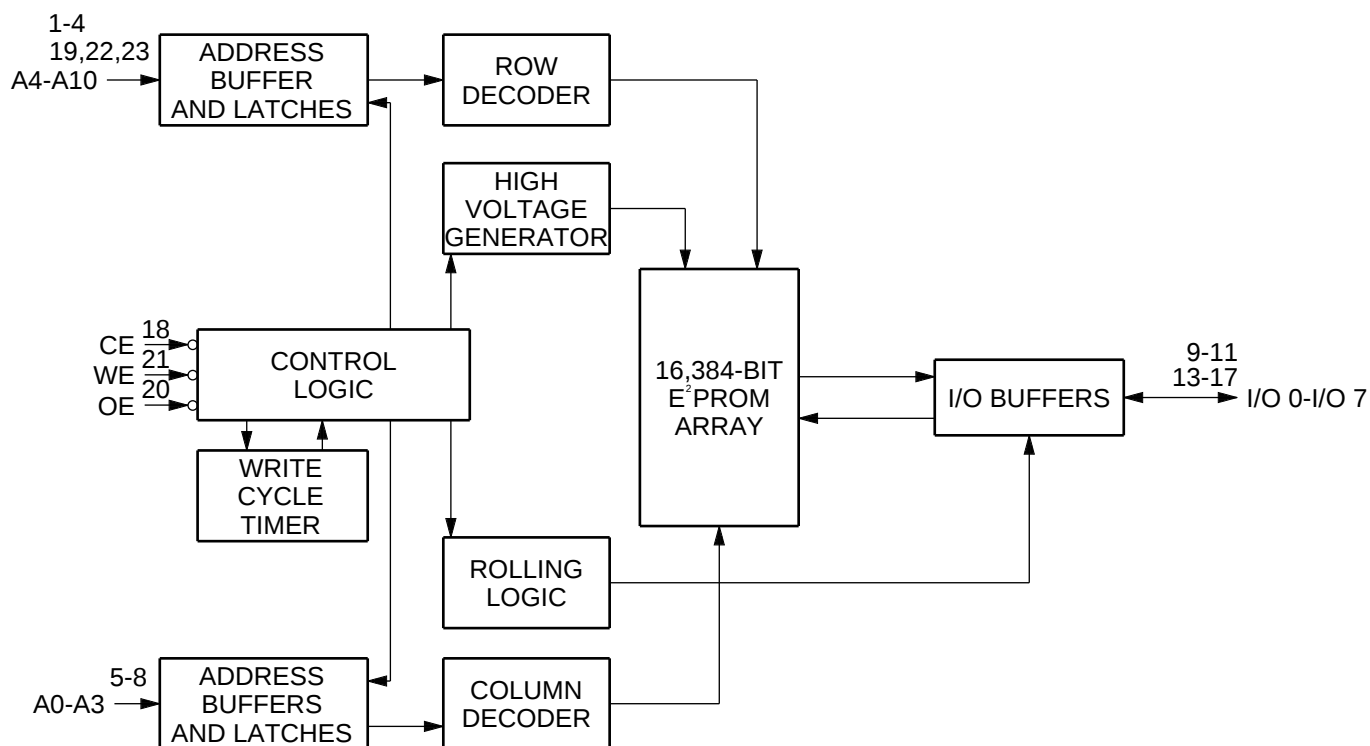
$\overline{CE}$; CHIP ENABLE

$\overline{WE}$; WRITE ENABLE

$\overline{OE}$; OUTPUT ENABLE

INPUT/OUTPUT

I/O0-I/O7 ; DATA



INPUTS			DATA	FUNCTION
CE	OE	WE		
0	0	1	OUT	READ
0	1		IN	WE CONTROL WRITE (BYTE WRITE)
	1	0	IN	CE CONTROL WRITE (BYTE WRITE)
1	X	X	HI-Z	SYNDBY/ WRITE INHIBIT
X	0	X	—	WRITE INHIBIT

0 ; LOW LEVEL
 1 ; HIGH LEVEL
 X ; DON'T CARE
 HI-Z ; HIGH IMPEDANCE