

ZX3CDBS1M832

MPPS™ Miniature Package Power Solutions 20V NPN LOW SATURATION TRANSISTOR AND 40V, 1A SCHOTTKY DIODE COMBINATION DUAL

SUMMARY

NPN Transistor — $V_{CEO} = 20V$; $R_{SAT} = 47m\Omega$; $I_C = 4.5A$

Schottky Diode — $V_R = 40V$; $V_F = 500mV$ (@1A); $I_C=1A$

DESCRIPTION

Packaged in the new innovative 3mm x 2mm MLP this combination dual comprises an ultra low saturation PNP transistor and a 1A Schottky barrier diode. This excellent combination provides users with highly efficient performance in applications including DC-DC and charging circuits.

Users will also gain several other **key benefits**:


Performance capability equivalent to much larger packages

Improved circuit efficiency & power levels

PCB area and device placement savings

Lower package height (0.9mm nom)

Reduced component count




3mm x 2mm Dual Die MLP

FEATURES

- Extremely Low Saturation Voltage (**150mV @1A**)
- H_{FE} characterised up to 6A
- $I_C = 4.5A$ Continuous Collector Current
- **Extremely Low V_F , fast switching Schottky**
- 3mm x 2mm MLP

APPLICATIONS


- DC - DC Converters
- Mobile Phones
- Charging Circuits
- Motor control

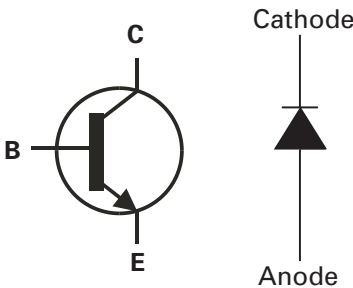

ORDERING INFORMATION

DEVICE	REEL	TAPE WIDTH	QUANTITY PER REEL
ZX3CDBS1M832TA	7''	8mm	3000
ZX3CDBS1M832TC	13''	8mm	10000

PINOUT



DEVICE MARKING

BS1

ZX3CDBS1M832

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Transistor			
Collector-Base Voltage	V_{CBO}	40	V
Collector-Emitter Voltage	V_{CEO}	20	V
Emitter-Base Voltage	V_{EBO}	7.5	V
Peak Pulse Current	I_{CM}	12	A
Continuous Collector Current (a)(f)	I_C	4.5	A
Continuous Collector Current (b)(f)	I_C	5	A
Base Current	I_B	1000	mA
Power Dissipation at TA=25°C (a)(f) Linear Derating Factor	P_D	1.5 12	W mW/°C
Power Dissipation at TA=25°C (b)(f) Linear Derating Factor	P_D	2.45 19.6	W mW/°C
Power Dissipation at TA=25°C (c)(f) Linear Derating Factor	P_D	1 8	W mW/°C
Power Dissipation at TA=25°C (d)(f) Linear Derating Factor	P_D	1.13 9	W mW/°C
Power Dissipation at TA=25°C (d)(g) Linear Derating Factor	P_D	1.7 13.6	W mW/°C
Power Dissipation at TA=25°C (e)(g) Linear Derating Factor	P_D	3 24	W mW/°C
Storage Temperature Range	T_{stg}	-55 to +150	°C
Junction Temperature	T_j	150	°C

THERMAL RESISTANCE

PARAMETER	SYMBOL	VALUE	UNIT
Junction to Ambient (a)(f)	$R_{\theta JA}$	83	°C/W
Junction to Ambient (b)(f)	$R_{\theta JA}$	51	°C/W
Junction to Ambient (c)(f)	$R_{\theta JA}$	125	°C/W
Junction to Ambient (d)(f)	$R_{\theta JA}$	111	°C/W
Junction to Ambient (d)(g)	$R_{\theta JA}$	73.5	°C/W
Junction to Ambient (e)(g)	$R_{\theta JA}$	41.7	°C/W

Notes


- (a) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (b) Measured at $t \leq 5$ secs for a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (c) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with minimal lead connections only**.
- (d) For a dual device surface mounted on 10 sq cm single sided 1oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (e) For a dual device surface mounted on 85 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (f) For a dual device with one active die.
- (g) For dual device with 2 active die running at equal power.
- (h) Repetitive rating - pulse width limited by max junction temperature. Refer to Transient Thermal Impedance graph.
- (i) The minimum copper dimensions required for mounting are no smaller than the exposed metal pads on the base of the device as shown in the package dimensions data. The thermal resistance for a dual device mounted on 1.5mm thick FR4 board using minimum copper 1 oz weight, 1mm wide tracks and one half of the device active is $R_{\theta h} = 250^\circ\text{C/W}$ giving a power rating of $P_{tot} = 500\text{mW}$.



ISSUE 1 - JUNE 2002

ZX3CDBS1M832

TRANSISTOR TYPICAL CHARACTERISTICS

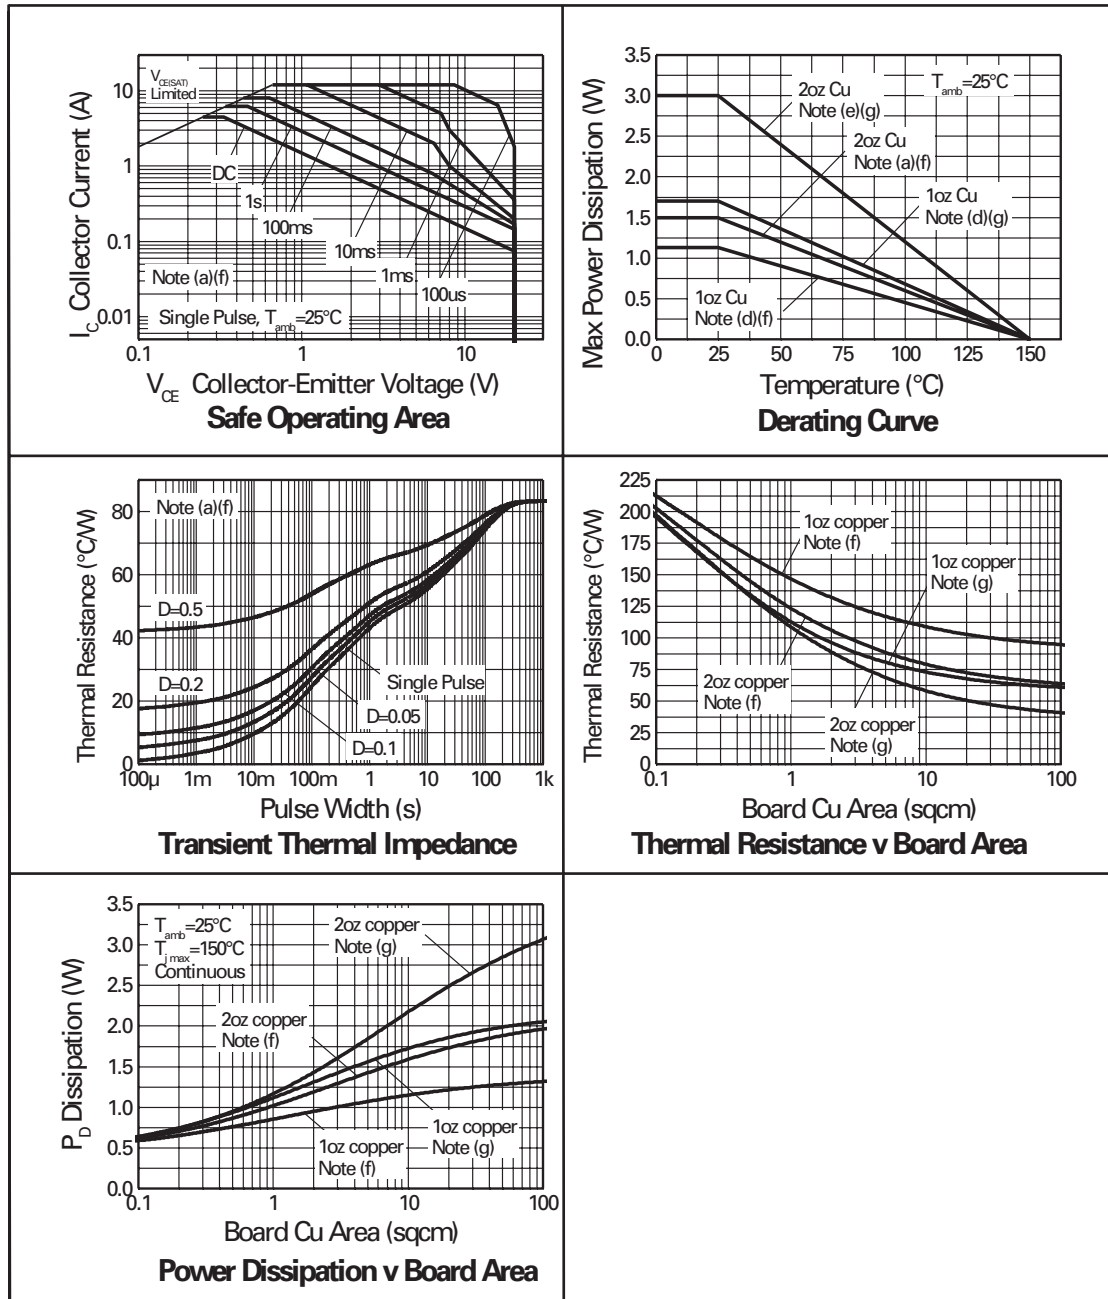

ZX3CDBS1M832

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Schottky Diode			
Continuous Reverse Voltage	V_R	40	V
Forward Voltage @ $I_F=1000\text{mA}(\text{typ})$	V_F	425	A
Forward Current	I_F	1850	mA
Average Peak Forward Current $D=50\%$	I_{FAV}	3	A
Non Repetitive Forward Current $t \leq 100\mu\text{s}$ $t \leq 10\text{ms}$	I_{FSM}	12 7	A A
Power Dissipation at $T_A=25^\circ\text{C}$ (a)(f) Linear Derating Factor	P_D	1.2 12	W mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ (b)(f) Linear Derating Factor	P_D	2 20	W mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ (c)(f) Linear Derating Factor	P_D	0.8 8	W mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ (d)(f) Linear Derating Factor	P_D	0.9 9	W mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ (d)(g) Linear Derating Factor	P_D	1.36 13.6	W mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ (e)(g) Linear Derating Factor	P_D	2.4 24	W mW/ $^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$
Junction Temperature	T_j	125	$^\circ\text{C}$

THERMAL RESISTANCE


PARAMETER	SYMBOL	VALUE	UNIT
Junction to Ambient (a)(f)	$R_{\theta JA}$	83	$^\circ\text{C/W}$
Junction to Ambient (b)(f)	$R_{\theta JA}$	51	$^\circ\text{C/W}$
Junction to Ambient (c)(f)	$R_{\theta JA}$	125	$^\circ\text{C/W}$
Junction to Ambient (d)(f)	$R_{\theta JA}$	111	$^\circ\text{C/W}$
Junction to Ambient (d)(g)	$R_{\theta JA}$	73.5	$^\circ\text{C/W}$
Junction to Ambient (e)(g)	$R_{\theta JA}$	41.7	$^\circ\text{C/W}$

Notes

- (a) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (b) Measured at $t < 5$ secs for a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (c) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with minimal lead connections only**.
- (d) For a dual device surface mounted on 10 sq cm single sided 1oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (e) For a dual device surface mounted on 85 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (f) For a dual device with one active die.
- (g) For dual device with 2 active die running at equal power.
- (h) Repetitive rating - pulse width limited by max junction temperature. Refer to Transient Thermal Impedance graph.
- (i) The minimum copper dimensions required for mounting are no smaller than the exposed metal pads on the base of the device as shown in the package dimensions data. The thermal resistance for a dual device mounted on 1.5mm thick FR4 board using minimum copper 1 oz weight, 1mm wide tracks and one half of the device active is $R_{\theta h} = 250^\circ\text{C/W}$ giving a power rating of $P_{tot} = 400\text{mW}$.

ZX3CDBS1M832

SCHOTTKY TYPICAL CHARACTERISTICS

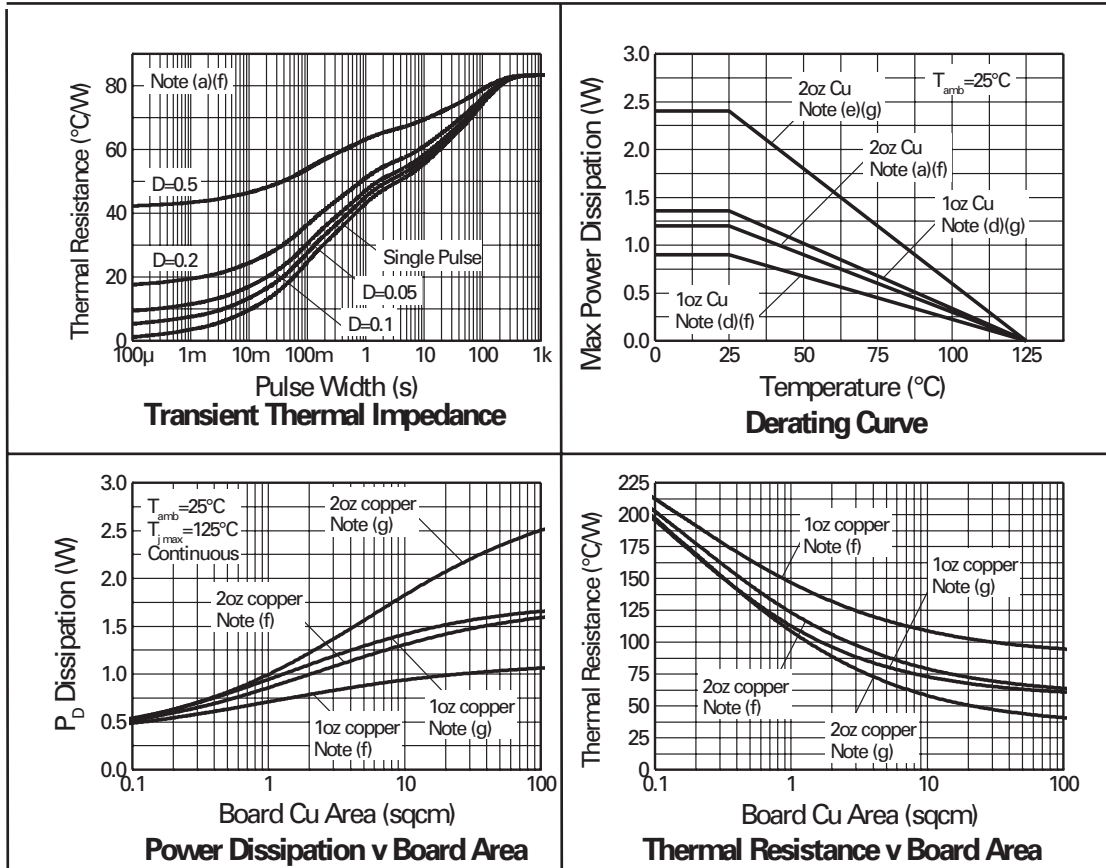

ZX3CDBS1M832


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
TRANSISTOR ELECTRICAL CHARACTERISTICS						
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	40	100		V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	20	27		V	$I_C = 10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	7.5	8.2		V	$I_E = 100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}			25	nA	$V_{CB} = 32\text{V}$
Emitter Cut-Off Current	I_{EBO}			25	nA	$V_{EB} = 6\text{V}$
Collector Emitter Cut-Off Current	I_{CES}			25	nA	$V_{CES} = 16\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		8	15	mV	$I_C = 0.1\text{A}, I_B = 10\text{mA}^*$
			90	150	mV	$I_C = 1\text{A}, I_B = 10\text{mA}^*$
			115	135	mV	$I_C = 2\text{A}, I_B = 50\text{mA}^*$
			190	250	mV	$I_C = 3\text{A}, I_B = 100\text{mA}^*$
			210	270	mV	$I_C = 4.5\text{A}, I_B = 125\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		0.98	-1.05	V	$I_C = 4.5\text{A}, I_B = 125\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		0.88	-0.95	V	$I_C = 4.5\text{A}, V_{CE} = 2\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	200	400			$I_C = 10\text{mA}, V_{CE} = 2\text{V}^*$
		300	450			$I_C = 0.2\text{A}, V_{CE} = 2\text{V}^*$
		200	360			$I_C = 2\text{A}, V_{CE} = 2\text{V}^*$
		100	180			$I_C = 6\text{A}, V_{CE} = 2\text{V}^*$
Transition Frequency	f_T	100	140		MHz	$I_C = 50\text{mA}, V_{CE} = 10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	C_{obo}		23	30	pF	$V_{CB} = 10\text{V}, f = 1\text{MHz}$
Turn-On Time	$t_{(on)}$		170		ns	$V_{CC} = 10\text{V}, I_C = 3\text{A}$
Turn-Off Time	$t_{(off)}$		400		ns	$I_{B1} = I_{B2} = 10\text{mA}$
SCHOTTKY DIODE ELECTRICAL CHARACTERISTICS						
Reverse Breakdown Voltage	$V_{(BR)R}$	40	60		V	$I_R = 300\mu\text{A}$
Forward Voltage	V_F		240	270	mV	$I_F = 50\text{mA}^*$
			265	290	mV	$I_F = 100\text{mA}^*$
			305	340	mV	$I_F = 250\text{mA}^*$
			355	400	mV	$I_F = 500\text{mA}^*$
			390	450	mV	$I_F = 750\text{mA}^*$
			425	500	mV	$I_F = 1000\text{mA}^*$
			495	600	mV	$I_F = 1500\text{mA}^*$
			420	—	mV	$I_F = 1000\text{mA}, T_a = 100^{\circ}\text{C}^*$
Reverse Current	I_R		50	100	μA	$V_R = 30\text{V}$
Diode Capacitance	C_D		25		pF	$f = 1\text{MHz}, V_R = 25\text{V}$
Reverse Recovery Time	t_{rr}		12		ns	switched from $I_F = 500\text{mA}$ to $I_R = 500\text{mA}$ Measured at $I_R = 50\text{mA}$

*Measured under pulsed conditions.


ZX3CDBS1M832

TRANSISTOR TYPICAL CHARACTERISTICS

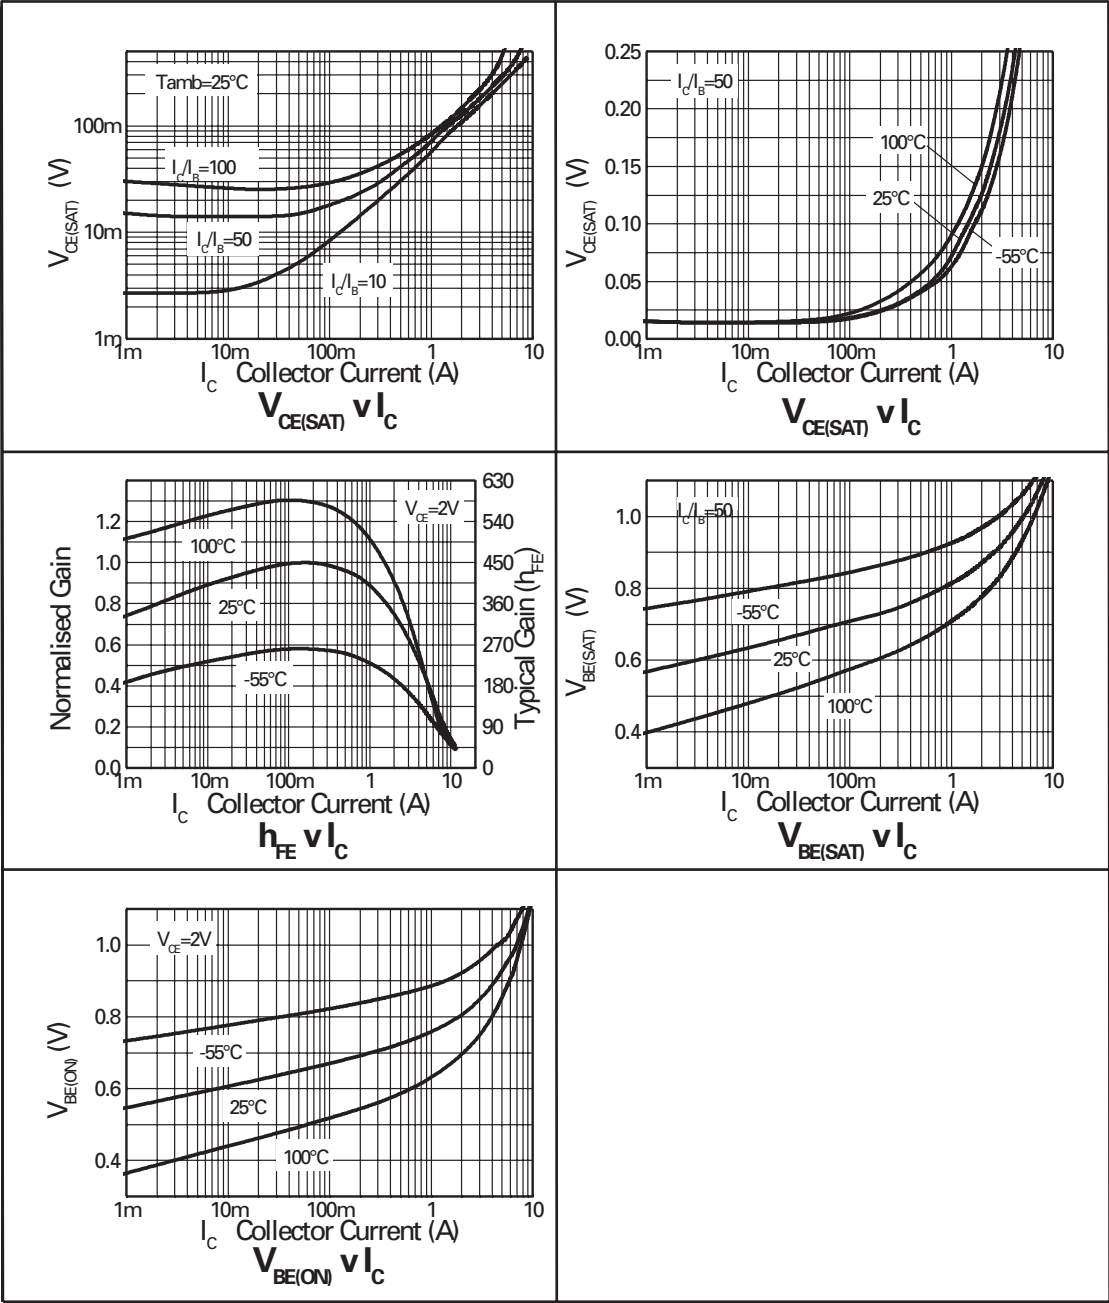


ZX3CDBS1M832

SCHOTTKY TYPICAL CHARACTERISTICS

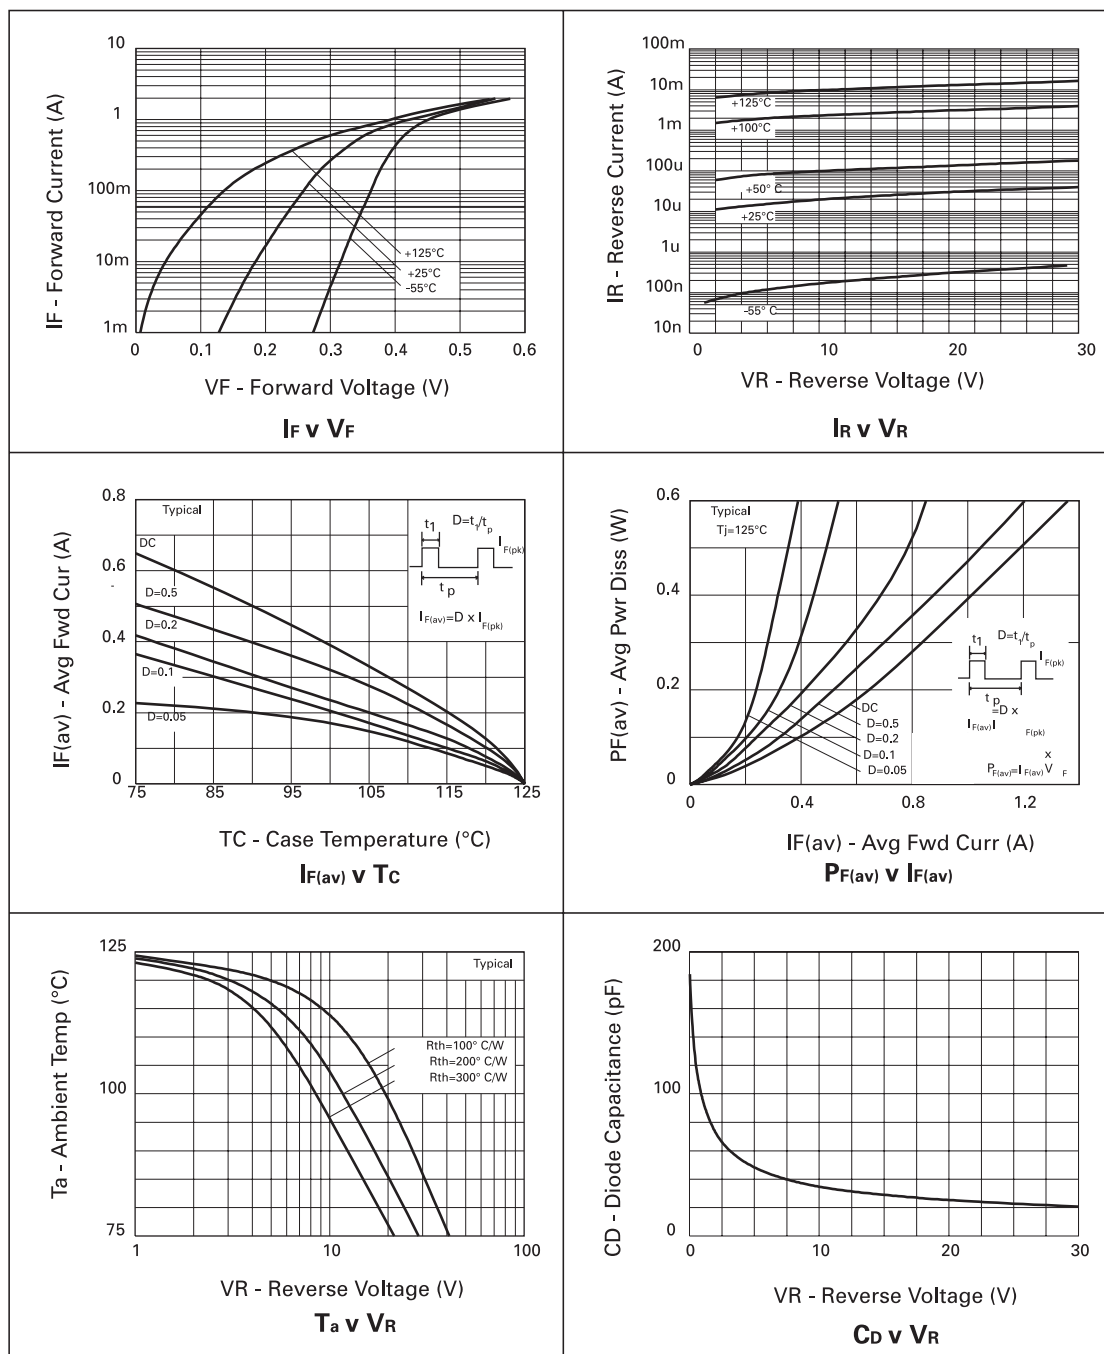

ZX3CDBS1M832

MLP832 PACKAGE OUTLINE (3mm x 2mm Micro Leaded Package)

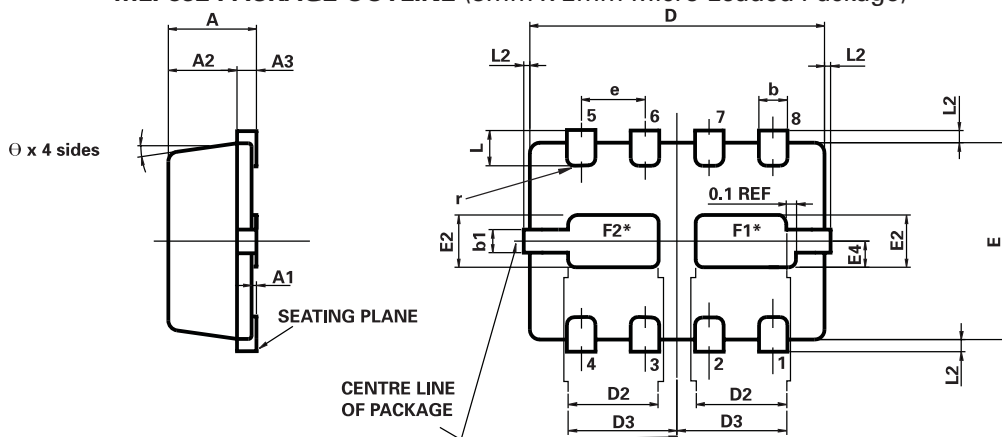

***Exposed Flags. Solder connection to improve thermal dissipation is optional.**

F1 at collector 1 potential

F2 at collector 2 potential

CONTROLLING DIMENSIONS IN MILLIMETRES
APPROX. CONVERTED DIMENSIONS IN INCHES

MLP832 PACKAGE DIMENSIONS

DIM	MILLIMETRES		INCHES		DIM	MILLIMETRES		INCHES	
	MIN.	MAX.	MIN.	MAX.		MIN.	MAX.	MIN.	MAX.
A	0.80	1.00	0.031	0.039	e	0.65 REF		0.0256 BSC	
A1	0.00	0.05	0.00	0.002	E	2.00 BSC		0.0787 BSC	
A2	0.65	0.75	0.0255	0.0295	E2	0.43	0.63	0.017	0.0249
A3	0.15	0.25	0.006	0.0098	E4	0.16	0.36	0.006	0.014
b	0.24	0.34	0.009	0.013	L	0.20	0.45	0.0078	0.0157
b1	0.17	0.30	0.0066	0.0118	L2	_____	0.125	0.00	0.005
D	3.00 BSC		0.118 BSC		r	0.075 BSC		0.0029 BSC	
D2	0.82	1.02	0.032	0.040	Θ	0°	12°	0°	12°
D3	1.01	1.21	0.0397	0.0476					

© Zetex plc 2002

Europe

Zetex plc
Fields New Road
Chadderton
Oldham, OL9 8NP
United Kingdom
Telephone (44) 161 622 4422
Fax: (44) 161 622 4420
uksales@zetex.com

Zetex GmbH
Streitfeldstraße 19
D-81673 München

Germany
Telefon: (49) 89 45 49 49 0
Fax: (49) 89 45 49 49 49
europe.sales@zetex.com

Americas

Zetex Inc
700 Veterans Memorial Hwy
Hauppauge, NY 11788

USA
Telephone: (631) 360 2222
Fax: (631) 360 8222
usa.sales@zetex.com

Asia Pacific

Zetex (Asia) Ltd
3701-04 Metroplaza, Tower 1
Hing Fong Road
Kwai Fong
Hong Kong
Telephone: (852) 26100 611
Fax: (852) 24250 494
asia.sales@zetex.com

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to **www.zetex.com**

ISSUE 1 - JUNE 2002

