

Hitachi Microcomputer H8/300H Series

Application Notes for CPU

HITACHI

ADE-502-033

Notice

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in **MEDICAL APPLICATIONS** without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in **MEDICAL APPLICATIONS**.

Contents

Section 1	CPU Architecture	1
1.1	Introduction	1
1.1.1	Features	1
1.1.2	Register Configuration	2
1.1.3	Data Configuration	4
1.1.4	Address Space	6
1.1.5	Addressing Mode	7
1.1.6	Instructions	16
Section 2	Instructions	17
2.1	Data Transfer Instructions	17
2.1.1	MOV	17
2.1.2	PUSH, POP	19
2.2	Arithmetic Operation Instructions	21
2.2.1	ADD, SUB	21
2.2.2	ADDX, SUBX	22
2.2.3	INC, DEC	23
2.2.4	ADDS, SUBS	24
2.2.5	DAA, DAS	25
2.2.6	MULXU, DIVXU, MULXS, DIVXS	25
2.2.7	CMP	27
2.2.8	NEG	28
2.2.9	EXTS, EXTU	28
2.3	Logic Operation Instructions	30
2.3.1	AND, OR, XOR, NOT	30
2.4	Shift Instructions	32
2.4.1	SHAL, SHAR, SHLL, SHLR, ROTL, ROTR, ROTXL, ROTXR	32
2.5	Bit Manipulation Instructions	34
2.5.1	BSET, BCLR, BNOT, BTST, BLD, BILD, BST, BIST, BAND, BIAN, BOR, BIOR, BXOR, BIXOR	34
2.6	Branch Instructions	36
2.6.1	Bcc	36
2.6.2	JMP	38
2.6.3	BSR, JSR	38
2.6.4	RTS	40
2.7	System Control Instructions	41
2.7.1	RTE	41
2.7.2	SLEEP	41
2.7.3	LDC, STC	42
2.7.4	ANDC, ORC, XORC	43
2.7.5	NOP	44
2.7.6	TRAPA	44
2.8	Block Transfer Instructions	45
2.8.1	EEPMOV	45
Section 3	Load Module Conversion Procedures	47

Section 4	Examples of Software Applications	49
4.1	Software Applications Examples	49
4.2	Using Software Examples	50
4.2.1	Program Listing Page Format (Format 4)	51
4.3	Block Transfer.....	52
4.3.1	Description of Functions	54
4.3.2	Cautions for Use	56
4.3.3	Description of Data Memory	56
4.3.4	Examples of Use	57
4.3.5	Principles of Operation	57
4.3.6	Program Listing.....	59
4.4	Block Transfer Using Block Transfer Instruction.....	60
4.4.1	Description of Functions	63
4.4.2	Cautions for Use	64
4.4.3	Description of Data Memory	64
4.4.4	Examples of Use	65
4.4.5	Principles of Operation	65
4.4.6	Program Listing.....	66
4.5	Branching Using a Table.....	67
4.5.1	Description of Functions	69
4.5.2	Cautions for Use	70
4.5.3	Description of Data Memory	70
4.5.4	Examples of Use	71
4.5.5	Principles of Operation	72
4.5.6	Program Listing.....	74
4.6	Counting the Number of Logical 1s in 8-Bit Data	75
4.6.1	Description of Functions	76
4.6.2	Cautions for Use	77
4.6.3	Description of Data Memory	77
4.6.4	Examples of Use	77
4.6.5	Principles of Operation	78
4.6.6	Program Listing.....	80
4.7	Find the First 1 in 32-Bit Data	81
4.7.1	Description of Functions	83
4.7.2	Cautions for Use	83
4.7.3	Description of Data Memory	83
4.7.4	Examples of Use	84
4.7.5	Principles of Operation	84
4.7.6	Program Listing.....	86
4.8	64-Bit Binary Addition.....	87
4.8.1	Description of Functions	90
4.8.2	Cautions for Use	90
4.8.3	Description of Data Memory	90
4.8.4	Examples of Use	91
4.8.5	Principles of Operation	92
4.8.6	Program Listing.....	93
4.9	64-Bit Binary Subtraction	94
4.9.1	Description of Functions	97
4.9.2	Cautions for Use	97

4.9.3	Description of Data Memory	97
4.9.4	Examples of Use	98
4.9.5	Principles of operation	99
4.9.6	Program Listing.....	100
4.10	Unsigned 32-Bit Binary Multiplication	101
4.10.1	Description of functions.....	104
4.10.2	Cautions for Use	104
4.10.3	Description of Data Memory	104
4.10.4	Examples of Use	105
4.10.5	Principles of Operation	106
4.10.6	Program Listing.....	109
4.11	Unsigned 32-Bit Binary Division.....	110
4.11.1	Description of Functions	113
4.11.2	Cautions for Use	113
4.11.3	Description of Data Memory	113
4.11.4	Examples of Use	114
4.11.5	Principles of Operation	115
4.11.6	Program Listing.....	117
4.12	Signed 16-Bit Binary Multiplication.....	118
4.12.1	Description of Functions	120
4.12.2	Cautions for Use	120
4.12.3	Description of Data Memory	120
4.12.4	Examples of Use	121
4.12.5	Principles of Operation	121
4.12.6	Program Listing.....	122
4.13	Signed 32-Bit Binary Multiplication.....	123
4.13.1	Description of Functions	126
4.13.2	Cautions for Use	126
4.13.3	Description of Data Memory	126
4.13.4	Examples of Use	127
4.13.5	Principles of Operation	128
4.13.6	Program Listing.....	132
4.14	Signed 32-Bit Binary Division (16-Bit Divisor)	133
4.14.1	Description of Functions	136
4.14.2	Cautions for Use	136
4.14.3	Description of Data Memory	136
4.14.4	Examples of Use	137
4.14.5	Principles of Operation	137
4.14.6	Program Listing.....	140
4.15	Signed 32-Bit Binary Division (32-Bit Divisor)	141
4.15.1	Description of Functions	144
4.15.2	Cautions for Use	144
4.15.3	Description of Data Memory	144
4.15.4	Examples of Use	145
4.15.5	Principles of Operation	146
4.15.6	Program Listing.....	147
4.16	8-Digit Decimal Addition.....	148
4.16.1	Description of Functions	151
4.16.2	Cautions for Use	151

4.16.3	Description of Data Memory	151
4.16.4	Examples of Use	152
4.16.5	Principles of Operation	152
4.16.6	Program Listing	154
4.17	8-Digit Decimal Subtraction	155
4.17.1	Description of Functions	158
4.17.2	Cautions for Use	158
4.17.3	Description of Data Memory	158
4.17.4	Examples of Use	159
4.17.5	Principles of Operation	159
4.17.6	Program Listing	161
4.18	Sum of Products	162
4.18.1	Description of Functions	165
4.18.2	Cautions for Use	165
4.18.3	Description of Data Memory	166
4.18.4	Examples of Use	166
4.18.5	Principles of Operation	166
4.18.6	Program Listing	168
4.19	Sorting	169
4.19.1	Description of Functions	171
4.19.2	Description of Data Memory	171
4.19.3	Examples of Use	172
4.19.4	Principles of Operation	173
4.19.5	Processing Method in Program	173
4.19.6	Program Listing	175
Appendix A Instruction Set		177
A.1	Number of Execution States	178
Appendix B Assembler		190
B.1	.CPU	190
B.2	.SECTION	191
B.3	.EQU	193
B.4	.ORG	194
B.5	.DATA	195
B.6	.RES	196
B.7	.END	197

Section 1 CPU Architecture

1.1 Introduction

The H8/300H is a high-speed CPU with an internal 32-bit configuration and architecture that is upward-compatible with the H8/300. The H8/300H CPU has sixteen 16-bit general registers, can handle 16 Mbyte of linear address space, and is ideal for realtime control.

1.1.1 Features

The H8/300H has the following features:

- Upward compatibility with the H8/300: H8/300 object programs can be run without any changes
- Sixteen 16-bit general registers (can also be used as a sixteen 8-bit registers or eight 32-bit registers)
- Sixty two basic instructions: 8/16/32 bit operation instructions, multiplication/division instructions, powerful bit-manipulation instructions
- Eight types of addressing modes:
 - Register direct (Rn)
 - Register indirect (@ERn)
 - Register indirect with displacement (@(d:16, ERn)/@(d:24, ERn))
 - Post-increment/pre-decrement register indirect (@ERn+/@-ERn),
 - Absolute addressing (@aa:8/@aa:16/@aa:24)
 - Immediate (#xx:8/#xx:16/#xx:32)
 - Program counter relative (d:8, d:16)
 - Memory indirect (@@aa:8)
- 16 Mbyte address space
- High-speed operation:
 - Almost all common instructions executed in 2, 4, or 6 states
 - Maximum operating frequency: 16 MHz
 - Addition/subtraction between 8/16/32-bit registers: 0.17 μ s
 - Multiplication of two 8-bit registers: 1.2 μ s
 - Division of a 16-bit by an 8-bit register: 1.2 μ s
 - Multiplication of two 16-bit registers: 1.8 μ s
 - Division of a 32-bit by a 16-bit register: 1.8 μ s
- Two CPU operating modes: Normal mode/advanced mode
- Power-down mode: SLEEP instruction activates power-down mode

1.1.2 Register Configuration

Figure 1.1 shows the register configuration for the H8/300H. The H8/300H CPU is composed of sixteen 8-bit general register (R0H/R0L–R7H/R7L), eight 16-bit extended registers (E0–E7), one 24-bit program counter (PC) and one 8-bit condition code register (CCR), which are used as control registers.

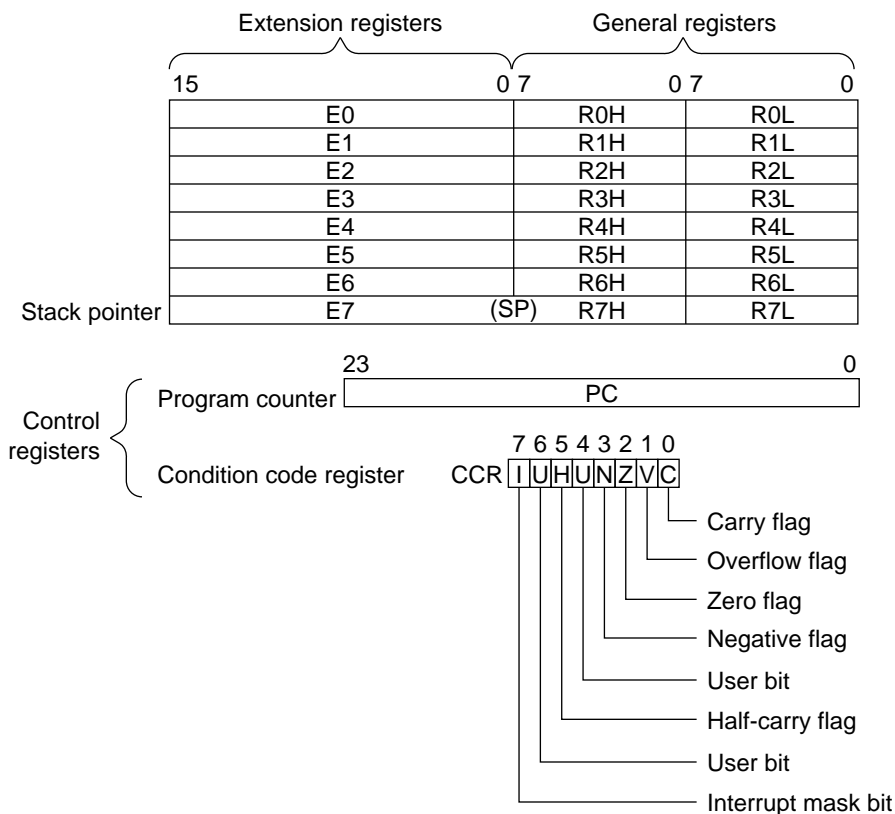


Figure 1.1 Composition of Registers

Extended Registers: There are two ways of using extended registers:

- When working with 32-bit data and addresses (24 bits), 16-bit general registers (R0–R7) are combined as shown in table 1.1 and used as the upper 16 bits of 32-bit registers (ERn).
- They can also be used as independent 16-bit registers (En).

Note: The function of E7 as the upper 16 bits of the stack pointer (SP) is already allocated and is used implicitly in exception processing and subroutine calls.

General Registers:

- General registers can be used as independent 8-bit registers (R0H/R0L–R7H/R7L).
- 8-bit registers can be combined with each other as shown in figure 1.2 for use as 16-bit registers (Rn).
- When working with 32-bit data and addresses (24 bits) and combining extended registers (E0–E7) as shown in figure 1.3, general registers can be used as the lower 16 bits of 32-bits registers (ERn).

Note: The function of R7 as the lower 16 bits of the stack pointer (SP) is already allocated and is used implicitly in exception processing and subroutine calls.

R0	R0H	R0L	E0
R1	R1H	R1L	E1
R2	R2H	R2L	E2
R3	R3H	R3L	E3
R4	R4H	R4L	E4
R5	R5H	R5L	E5
R6	R6H	R6L	E6
R7	R7H	R7L	E7

Figure 1.2 16-Bit Registers (Rn)

ER0	E0	R0
ER1	E1	R1
ER2	E2	R2
ER3	E3	R3
ER4	E4	R4
ER5	E5	R5
ER6	E6	R6
ER7	E7	R7

Figure 1.3 32-Bit Registers (ERn)

Program counter (PC): The PC is a 24-bit counter that indicates the address of the next instruction to be executed by the CPU.

Condition Code Register (CCR): The CCR is an 8-bit register that indicates the internal status of the CPU (table 1.1).

Table 1.1 Condition Code Register

Bit	Function	Description
7	Interrupt mask bit (I)	When this bit is 1, interrupts are masked. Note that a nonmaskable interrupt is received regardless of the status of the I bit. When exception processing begins, this bit is set to 1.
6	User bit (UI)	Can read/write using software (LDC, STC, ANDC, ORC, XORC instructions). Can also be used as an interrupt mask bit. For more information, see the hardware manual for the product in question.
5	Half carry flag (H)	When executing the ADD.B, ADDX.B, SUB.B, SUBX.B, CMP.B, or NEG.B instructions results in a borrow or carry at bit 3, or when executing an ADD.W, SUB.W, CMP.W, or NEG.W instruction results in a borrow or carry at bit 11, or when executing an ADD.L, SUB.L, CMP.L, or NEG.L instruction results in a borrow or carry at bit 27, the bit is set to 1; otherwise, it is set to 0.
4	User bit (U)	Can read/write using software (LDC, STC, ANDC, ORC, XORC instructions).
3	Negative flag (N)	The MSB of the data is considered a sign bit and its value is saved.
2	Zero flag (Z)	When the data is zero this bit is set to 1; when the data is nonzero, the bit is cleared to 0.
1	Overflow flag (V)	When execution of an arithmetic operation instruction creates an overflow, this bit is set to 1. In all other cases, it is set to 0.
0	Carry flag (C)	<p>When execution of an operation creates a carry, this bit is set to 1; otherwise, it is set to 0. There are three types of carries:</p> <ol style="list-style-type: none"> 1. Carries caused by addition 2. Borrows caused by subtraction 3. Carries caused by shift/rotates <p>The carry flag has a bit accumulator function that can be used by bit manipulation instructions.</p>

1.1.3 Data Configuration

The H8/300H can work with 1-bit, 4-bit BCD, 8-bit (byte), 16-bit (word), and 32-bit (longword) data. 1-bit data is handled with bit manipulation instructions and accessed as the nth bit (n = 0, 1, 2, ..., 7) of the operand data (byte). In the DAA and DAS decimal adjust instructions, byte data is two columns of 4-bit BCD data.

Data Configuration of Registers: Table 1.2 shows the configuration of data in the registers.

Table 1.2 Register Data Configuration

Data Type Register No. Data Image

1 bit	RnH	<div><div>70</div><div>76543210</div><div>Don't care</div></div>
	RnL	<div><div>70</div><div>76543210</div><div>Don't care</div></div>
4-bit BCD	RnH	<div><div>Lower column</div><div>7430</div><div>Don't care</div><div>Upper column</div></div>
	RnL	<div><div>Lower column</div><div>7430</div><div>Don't care</div><div>Upper column</div></div>
Byte	RnH	<div><div>70</div><div>Don't care</div></div>
	RnL	<div><div>70</div><div>Don't care</div></div>
Word	Rn	<div><div>150</div><div></div></div>
	En	<div><div>150</div><div></div></div>
Long word	ERn	<div><div>3116150</div><div>EnRn</div></div>

Legend

- ERn: General register (long word size)
- RnH: Top of general register
- RnL: Bottom of general register
- MSB: Most significant bit
- LSB: Least significant bit

Data Configuration in Memory: Table 1.3 shows the configuration of data in memory. The H8/300H CPU can access word and longword data in memory. The MOV.W and MOV.L instructions are limited to data that starts from even addresses. When accessing word or long word data that starts from odd addressees, the LSB of the address is considered 0 and data is accessed starting from the address one before. In such cases, no address errors are produced. The same applies to instruction code.

Table 1.3 Memory Data Configuration

Data Type	Memory Image								
1 bit	nth address	7 0							
		7	6	5	4	3	2	1	0
Byte	nth address								
		MSB							LSB
Word	Even address								
		MSB							
	Odd address								
		LSB							
Long word	Even address								
		MSB							
	Odd address								
	Even address								
Odd address									
	LSB								

1.1.4 Address Space

There are two H8/300H operating modes: normal mode and advanced mode. Table 1.4 describes the operating modes and figure 1.4 shows the memory maps for these two modes. The mode pin of the LSI is used to select the mode. See the hardware manual of the product in question for more information.

Table 1.4 Address Space for Normal and Advanced Operating Modes

CPU Operating Mode	Description
Normal	Supports up to a maximum of 64 kbytes of address space. In this mode, the top 8 bits of the address are ignored and memory is accessed on 16-bit addresses.
Advanced	Supports up to a maximum of 16 Mbytes of address space. Can access continuous space by using the 24-bit PC and extended registers in combination.

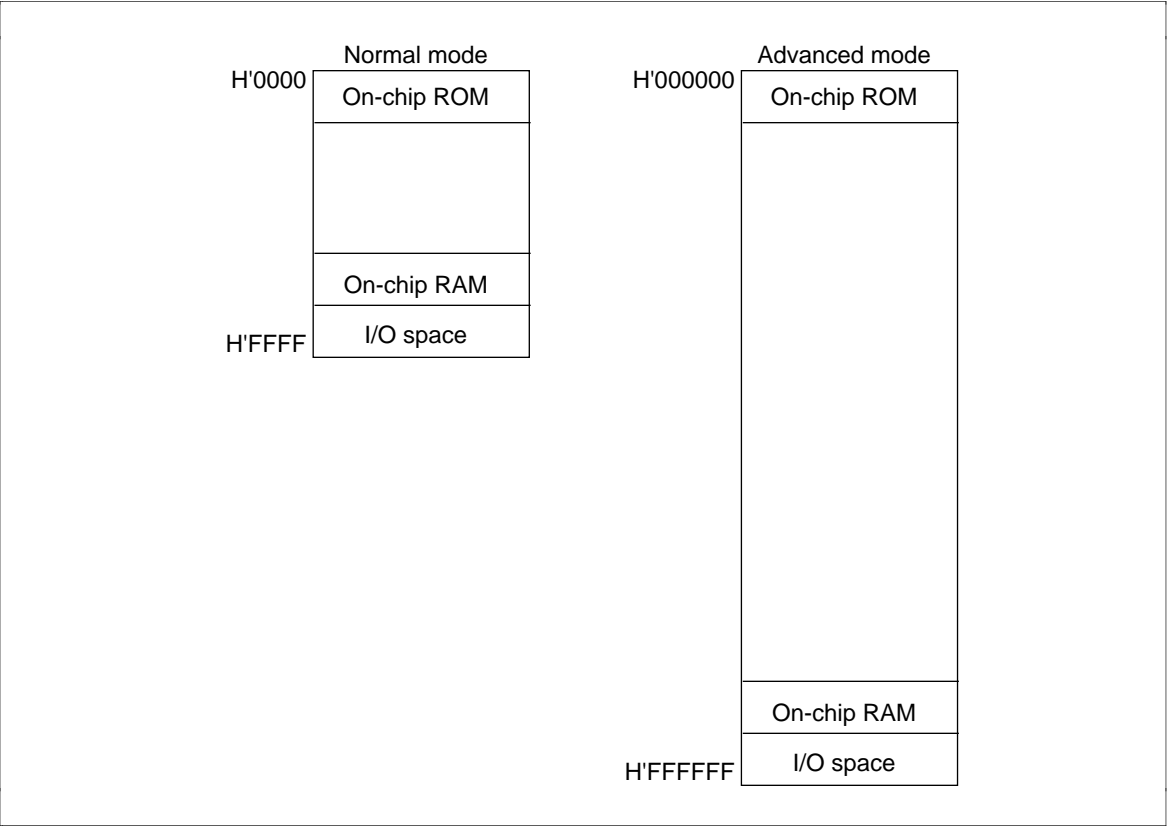


Figure 1.4 Memory Map

1.1.5 Addressing Mode

The H8/300H supports the eight addressing modes shown in table 1.5. The usable addressing modes vary for each instruction. Addressing modes are explained below using the various MOV commands as the primary example.

Table 1.5 Addressing Modes

Addressing Mode	Use
Register direct	Specify registers
Absolute addressing	
Register indirect	
Post-increment register indirect	
Pre-decrement register indirect	
Register indirect with displacement	Specify address
Memory indirect	
Program counter relative	
Immediate	Specify constants

Register Direct: The register name (ER0–ER7, R0–R7, E0–E7, R0H/R0L–R7H/R7L) is written in the operand and the contents of that register become the subject of the instruction (figure 1.5).

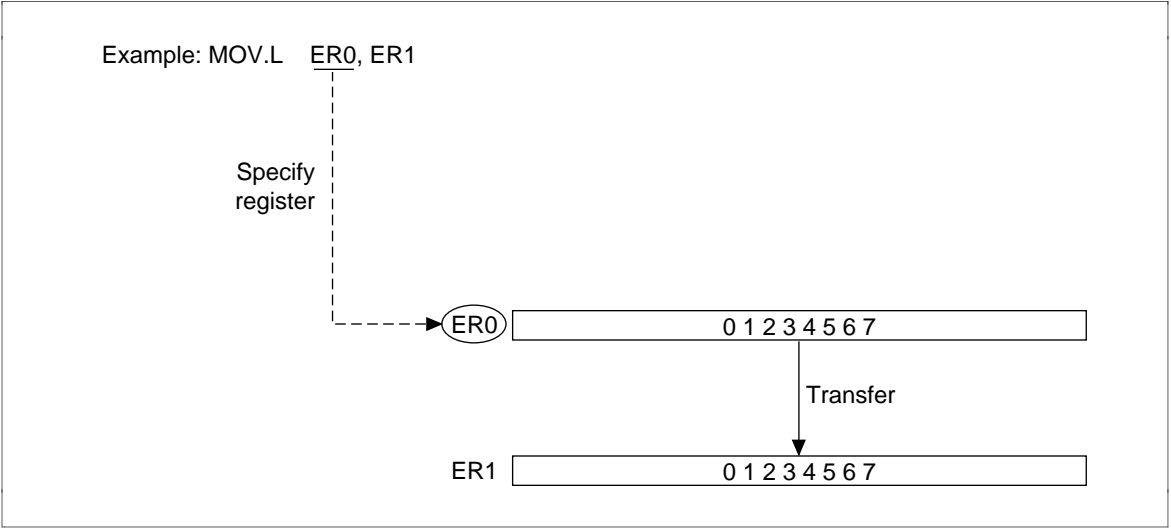


Figure 1.5 Register Direct

Absolute Addressing: Specifies the address directly. Addresses are usually specified as 24 bits in advanced mode and 16 bits in normal mode, but can be accessed by specifying only the lowest 16 bits or 8 bits when the absolute address area is 16 bits (H'000000–H'007FFF, H'FF8000–H'FFFFFF) or 8 bits (H'FFFF00–H'FFFFFF) (figure 1.6).


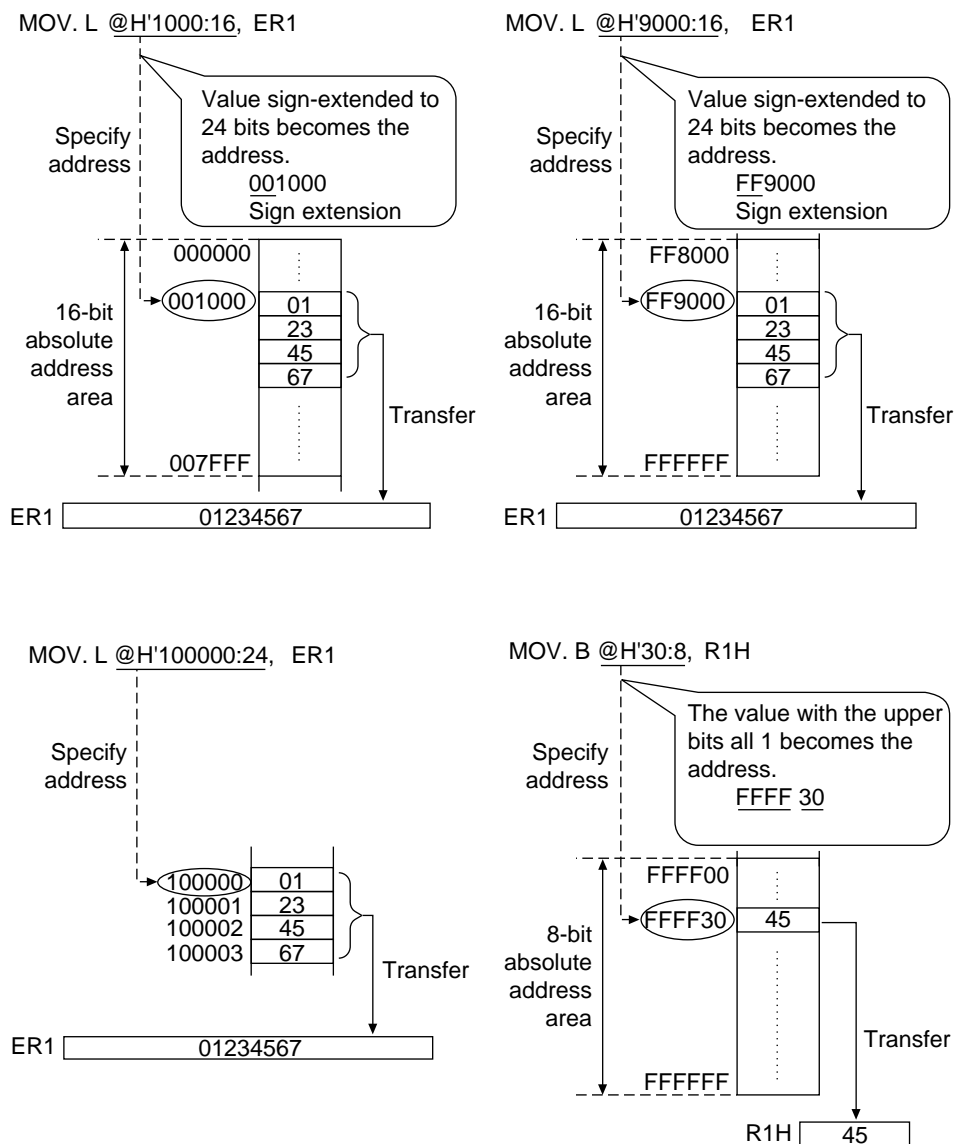


Figure 1.6 Absolute Addressing

Register Indirect: The address is specified by the lowest 24 bits of the 32 bit register (figure 1.7).

Example: MOV. L @ER0, ER1

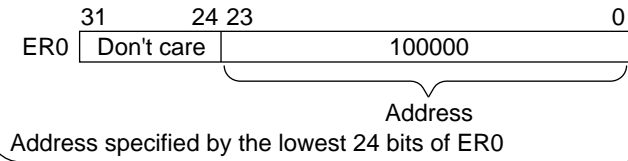Specify
address




100000	0 1
100001	2 3
100002	4 5
100003	6 7

Figure 1.7 Register Indirect

Post-Increment Register Indirect: The address is specified by the lowest 24 bits of the 32 bit register ERn. After instruction execution, the operand size value (B: 1, W: 2, L: 4) is added to the contents of the 32-bit register ERn (figure 1.8).

Example: MOV. L @ER0+, ER1

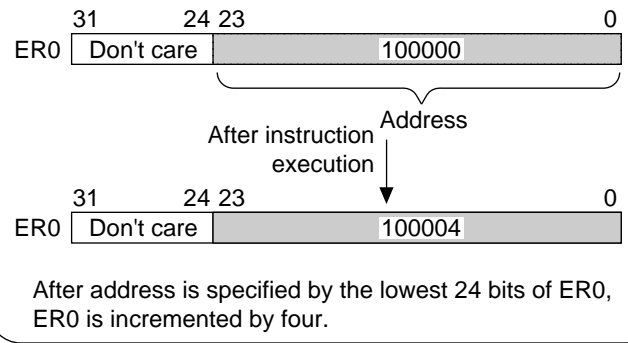Specify
address




100000	0 1
100001	2 3
100002	4 5
100003	6 7

Figure 1.8 Post-Increment Register Indirect


Pre-Decrement Register Indirect: The address is specified by the lowest 24 bits of the 32 bit register ERn. Before instruction execution, the operand size value (B: 1, W: 2, L: 4) is subtracted from the contents of the 32-bit register ERn (figure 1.9).

Example: MOV. L @-ER0, ER1

Specify
address



ER0 is decremented
by four.



After ER0 is decremented by four, the address is specified by the lowest 24 bits of ER0.

100004	0 1
100005	2 3
100006	4 5
100007	6 7

Figure 1.9 Pre-Decrement Register Indirect


Register Indirect with Displacement: The address is specified by the lowest 24 bits of the 32 bit register ERn plus a signed displacement of 16 bits or 24 bits. The results of this addition are not saved in the 32-bit register ERn (figure 1.10).

Diagram illustrating the address calculation for the LDR instruction:

31	24	23	0
ER0		Don't care	100000

+)	(+1000)	← Displacement
101000		← Address

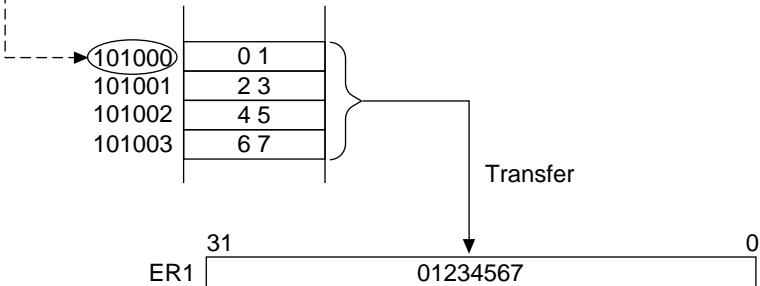The address is the lowest 24 bits of ERO plus the signed 16-bit displacement (+1000).




@(displacement:16, ERn): signed displacement is 16 bits
 @(displacement:24, ERn): signed displacement is 24 bits

Figure 1.10 Register Indirect with Displacement

Example: MOV. L @(H'F00000:24, ER0), ER1

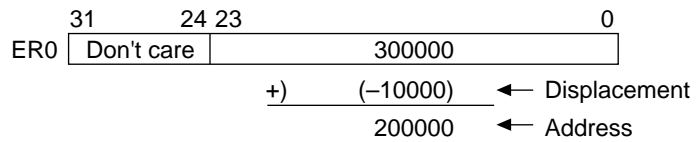Specify
address



The address is the lowest 24 bits of ER0
plus the signed 24-bit displacement (-100000).

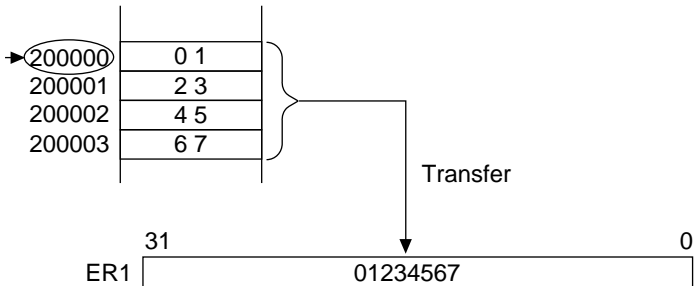


Figure 1.10 Register Indirect with Displacement (cont)

Memory Indirect: Uses branch address specification with the JSR and JMP instructions. The branch address is on the 8-bit memory indirect address area (advanced mode: H'000000–H'0000FF, normal mode: H'0000–H'00FF). To specify the branch address, specify the lower 8 bits of the address that stores the branch address. The address is stored in 2-byte units in normal mode and in 4-byte units for advanced mode (the first byte is ignored). Note that the top region of the 8-bit memory indirect address area is shared with the exception processing vector area. For more information, see the hardware manual for the LSI in question (figure 1.11).

Example: JSR @@H'F8

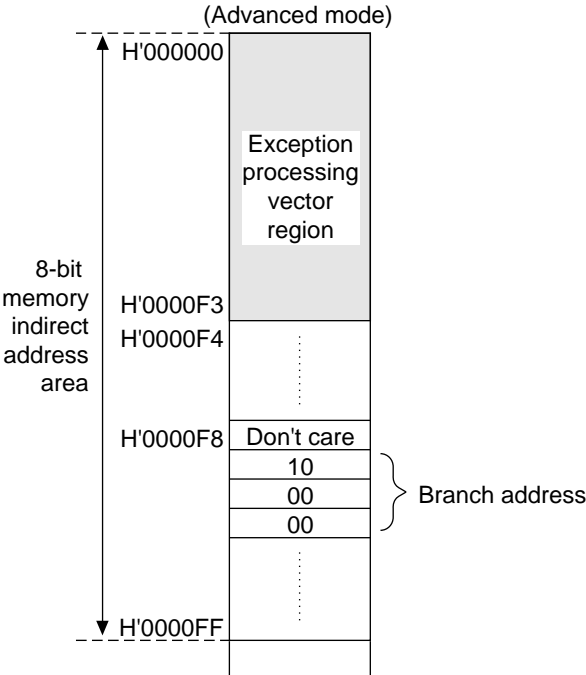


Figure 1.11 Memory Indirect

Example: JSR @@H'BA (subroutine branch to address 1000)

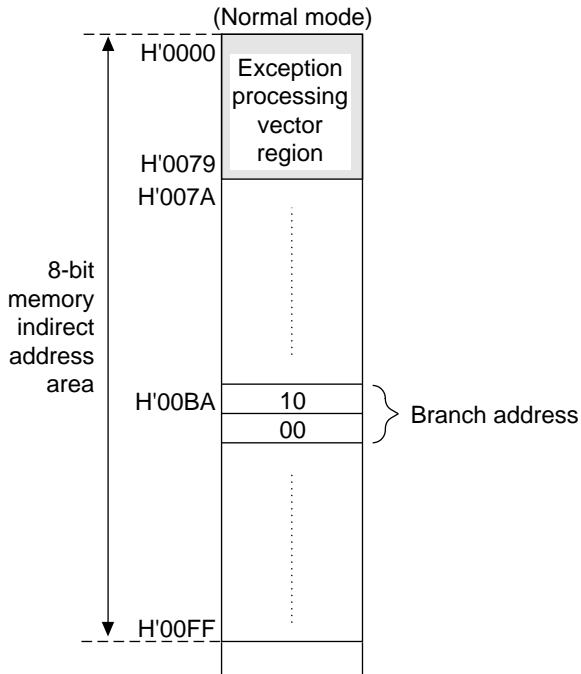


Figure 1.11 Memory Indirect (cont)

Program Counter Relative: Used to specify branch addresses using the Bcc or BSR instructions. It specifies the displacement of the branch address (signed 8-bit or signed 16-bit). Displacement is added to the contents of the PC and the address at the branch destination is generated. The PC contents become the start address of the next instruction, so the branchable area for the Bcc and BSR instructions are -126 to $+128$ bytes or -32766 to $+32678$ bytes. Normally, the branch destination symbol is specified rather than the displacement (figure 1.12).

```

          BSR      ABC
          ...
ABC: ADD. W      R0, E1
          ...

```

Figure 1.12 Program Counter Relative

Immediate: Directly specifies the data on the instruction (figure 1.13).

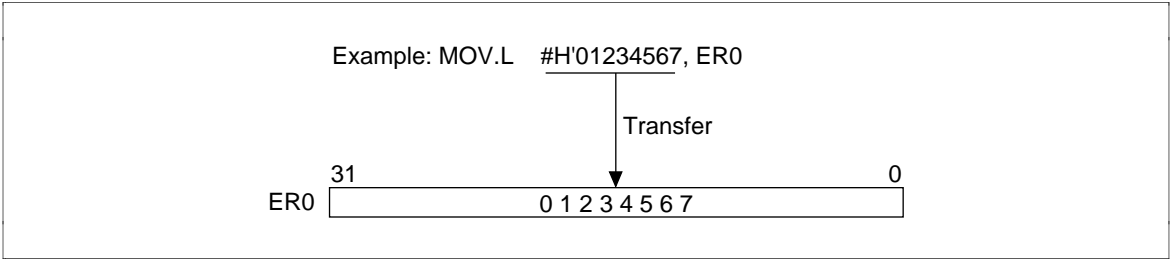


Figure 1.13 Immediate Addressing

1.1.6 Instructions

H8/300H CPU instructions have the following features:

- Instructions use a general register architecture
- A simplified and optimized 62-instruction basic set
- The common instruction length is 2 or 4 bytes
- High-speed executable multiplication and division instructions and powerful bit manipulation instructions
- 8 types of addressing modes

Instruction Types: There are a total of 62 H8/300H CPU instructions that are categorized according to function (table 1.6).

Table 1.6 Instruction Categories

Function	Instruction	Type
Data transfer instructions	MOV, PUSH, POP	3
Arithmetic operations instructions	ADD, SUB, ADDX, SUBX, INC, DEC, ADDS, SUBS, DAA, DAS, MULXU, DIVXU, MULXS, DIVXS, CMP, NEG, EXTS, EXTU	18
Logic operations instructions	AND, OR, XOR, NOT	4
Shift instructions	SHAL, SHAR, SHLL, SHLR, ROTL, ROTR, ROTXL, ROTXR	8
Bit manipulation instructions	BSET, BCLR, BNOT, BTST, BAND, BIAND, BOR, BIOR, BXOR, BIXOR, BLD, BILD, BST, BIST	14
Branching instructions	Bcc, JMP, BSR, JSR, RTS	5
System control instructions	RTE, SLEEP, LDC, STC, ANDC, ORC, XORC, NOP, TRAPA	9
Block transfer instructions	EEPMOV	1

Section 2 Instructions

2.1 Data Transfer Instructions

2.1.1 MOV

MOV (Move): Transfers 8-bit, 16-bit or 32-bit data (figure 2.1).

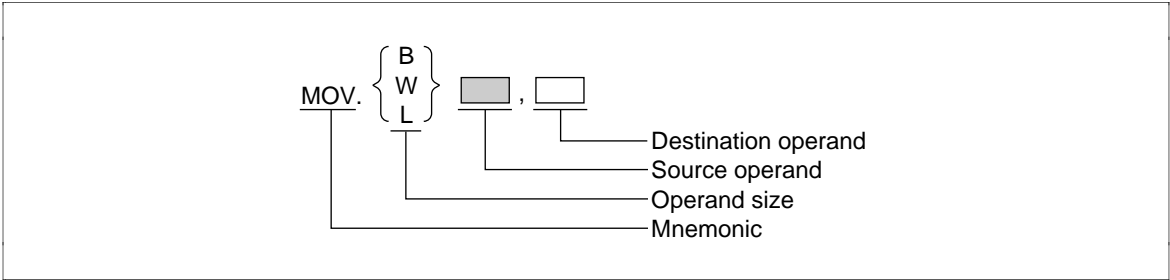


Figure 2.1 MOV

Table 2.1 MOV





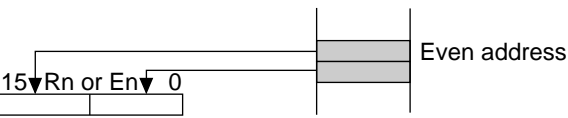
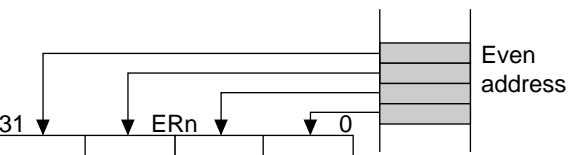

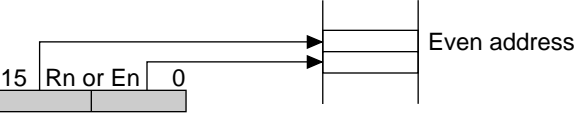
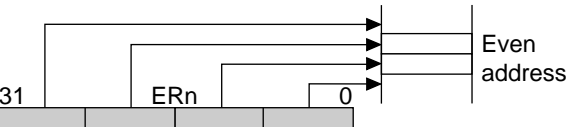



Mnem- onic	Op. Sz.	Source Operand	Dest. Op.	Description
MOV	B	RnH or RnL	RnH or RnL	
	W	Rn or En	Rn or En	
	L	ERn	ERn	
	B	@ERn @(d:16,ERn) @(d:24,ERn) @-ERn	RnH or RnL	
	W	@aa:8 @aa:16 @aa:24	Rn or En	
	L		ERn	
	B	RnH or RnL	@ERn @(d:16, ERn)	
	W	Rn or En	@(d:24, ERn) @ERn+ @aa:8 @aa:16 @aa:24	
	L	ERn		

Table 2.1 MOV (cont)

Mnem-onic	Op. Size	Source Operand	Dest. Op.	Description
MOV (cont)	B	#xx:8	RnH or RnL	
	W	#xx:16	Rn or En	
	L	#xx:32	ERn	

2.1.2 PUSH, POP

PUSH (Push Data): Saves the contents of register to stack (figure 2.2).
POP (Pop Data): Recovers the contents of register from stack (figure 2.2).

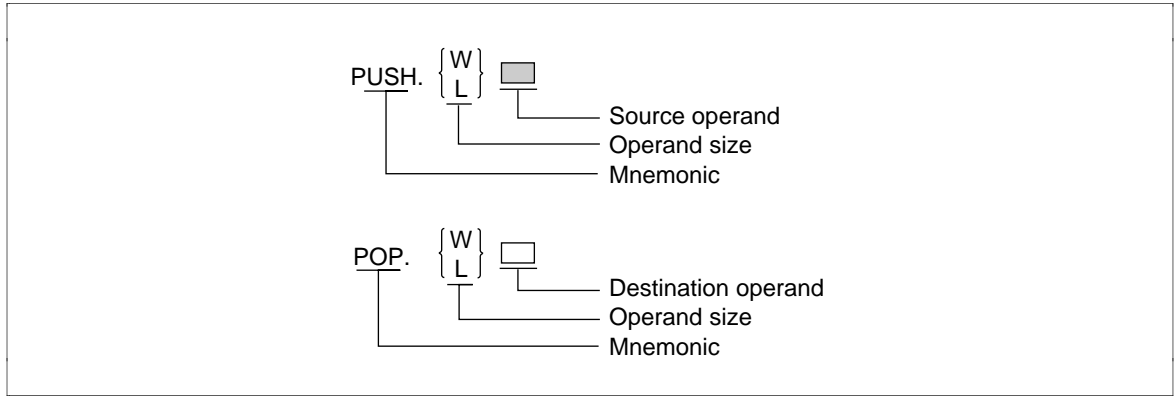
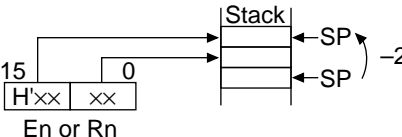
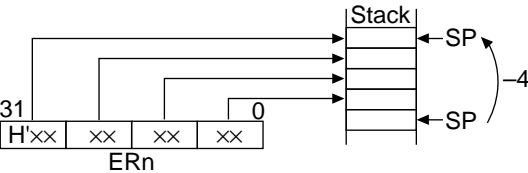
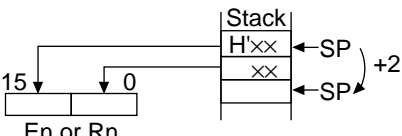
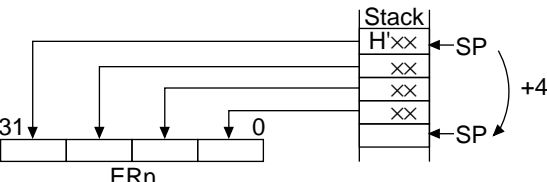


Figure 2.2 PUSH, POP

Table 2.2 **PUSH, POP**

Mnem- onic	Source Operand	Destination Operand (Source Operand)	Description
PUSH	W	(Rn, En)	<p>After 2 is subtracted from the stack pointer, the contents of 16-bit registers Rn and En are saved to the stack.</p> <div></div> <p>The instruction is the same as MOV.W Rn, @-SP or MOV.W En, @-SP.</p>
L		(ERn)	<p>After 4 is subtracted from the stack pointer, the contents of 32-bit register ERn are saved to the stack.</p> <div></div> <p>The instruction is the same as MOV.L ERn, @SP-.</p>
POP	W	Rn, En	<p>The contents of 16-bit registers Rn and En saved to the stack are recovered. After recovery 2 is added to the stack pointer.</p> <div></div> <p>The instruction is the same as MOV.W @SP+, Rn or MOV.W @SO+, En.</p>
L		ERn	<p>The contents of 32-bit register ERn saved to the stack are recovered. After recovery 4 is added to the stack pointer.</p> <div></div> <p>The instruction is the same as MOV.> @SP+, ERn.</p>

2.2 **Arithmetic Operation Instructions**

2.2.1 **ADD, SUB**

ADD (ADD binary): Summand (8 bit) + addend (8 bit) = sum (8 bit), or

Summand (16 bit) + addend (16 bit) = sum (16 bit),
or

Summand (32 bit) + addend (32 bit) = sum (32 bit)

SUB (Subtract binary): Subtrahend (8 bit) – minuend (8 bit) =
difference (8 bit), or

Subtrahend (16 bit) – minuend (16 bit) = difference
(16 bit), or

Subtrahend (32 bit) – minuend (32 bit) = difference
(32 bit)

Figure 2.3 shows examples of ADD and SUB.

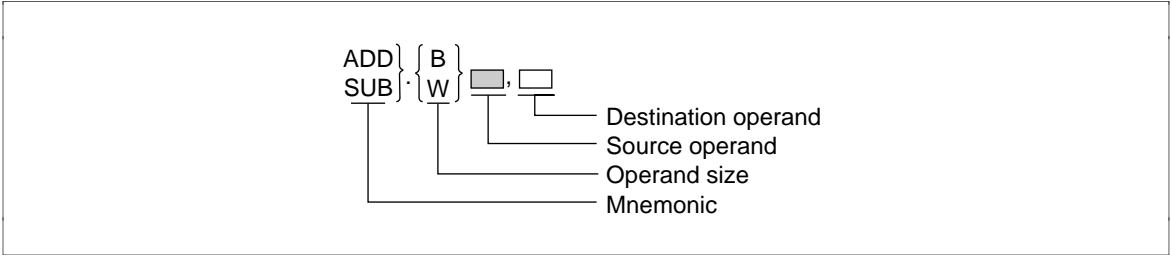


Figure 2.3 ADD, SUB

Table 2.3 ADD, SUB

Mnem- onic	Operand Size	Destination Operand	Source Operand	Description
ADD SUB	B	RmH or RmL	#xx:8 or RnH or RnL	
	W	Rm or Em	#xx:16 or Rn or En	
	L	ERm	#xx:32 or ERn	

2.2.2 ADDX, SUBX

ADDX (ADD with Extend Carry): Adds with C flag (carry from bottom) included (figure 2.4).

SUBX (Subtract with Extend Carry): Subtracts with C flag (borrow from bottom) included (figure 2.4).

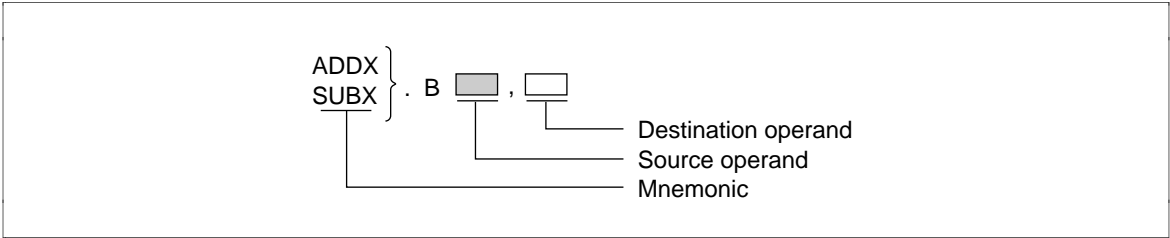


Figure 2.4 ADDX, SUBX

Table 2.4 ADDX, SUBX

Mnem- onic	Operand Size	Source Operand	Destination Operand	Description
ADDX SUBX	B	#xx:8 or RnH or RnL	RmH or RmL	<p>The diagram illustrates the operation of ADDX and SUBX. It shows an 8-bit register (RmH or RmL) containing H'xx. This register is added to or subtracted from an 8-bit immediate value (#xx:8) or another 8-bit register (RnH or RnL). The result is stored in the destination register. The C flag is updated based on the operation: C flag = 1 for borrow (SUBX) and C flag = 0 for no borrow (ADDX).</p>

2.2.3 INC, DEC

INC (Increment): Adds 1 to contents of 8-bit, registers RnH or RnL (figure 2.5). Adds 2 to the contents of 16-bit registers Rn or En and 32-bit register ERn.

DEC (DECrement): Subtracts 1 from contents of 8-bit, registers RnH or RnL (figure 2.5). Subtracts 2 from the contents of 16-bit registers Rn or En and 32-bit register ERn.

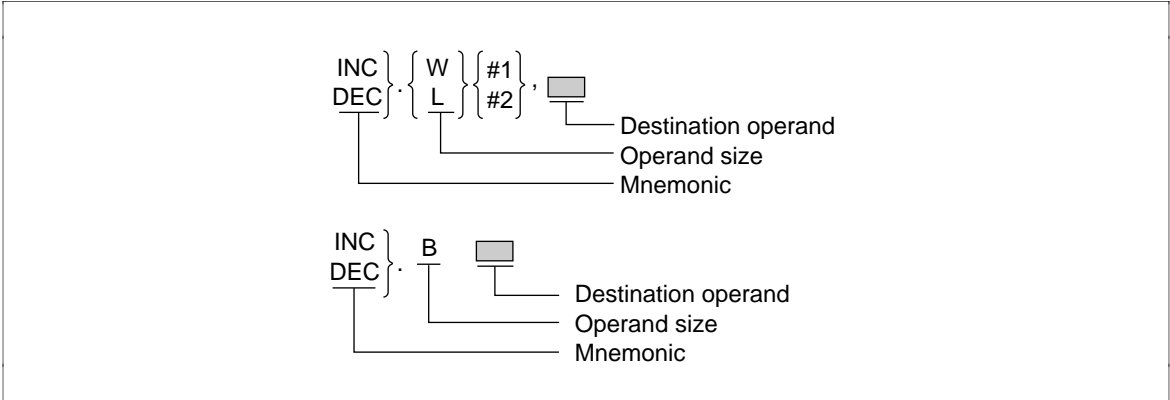





Figure 2.5 INC, DEC

Table 2.5 INC, DEC

Mnem- onic	Operand Size	Destination Operand	Description
INC DEC	B	RnH or RnL	
	W	Rn or En	
	L	ERn	

2.2.4 ADDS, SUBS

ADDS (Add with Sign Extension): Adds 1, 2 or, 4 to the contents of the 32-bit register ERn (figure 2.6).

SUBS (Subtract with Sign Extension): Subtracts 1, 2 or 4, from the contents of the 32-bit register ERn (figure 2.6).

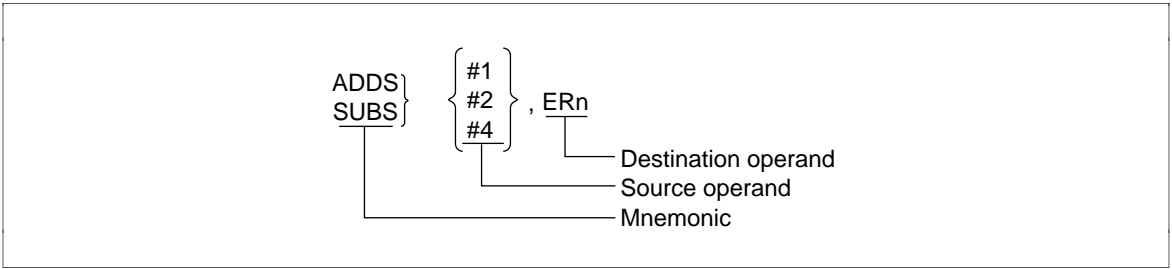
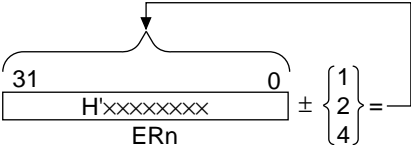


Figure 2.6 ADDS, SUBS

Table 2.6 ADDS, SUBS

Mnem- onic	Operand Size	Source Operand	Destination Operand	Description
ADDS SUBS	—	#1 or #2 or #4	ERn	

2.2.5 DAA, DAS

DAA (Decimal Adjust Add): Adjusts the sum from binary addition of 2 columns of 4-bit BCD data to 4-bit BCD data (figure 2.7).

DAS (Decimal Adjust Subtract): Adjusts the difference from binary subtraction of 2 columns of 4-bit BCD data to 4-bit BCD data (figure 2.7).

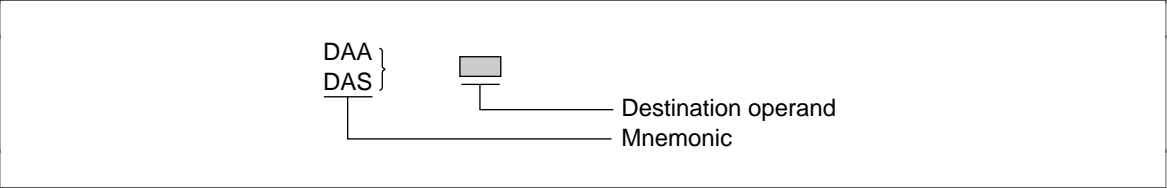


Figure 2.7 DAA, DAS

Table 2.7 DAA, DAS

Mnemonic	Destination Operand	Description
DAA	RnH or RnL	The results of binary addition or subtraction of 2 columns of 4-bit BCD data is adjusted to 2 columns of 4-bit BCD data.
DAS		

2.2.6 MULXU, DIVXU, MULXS, DIVXS

MULXU (Multiply Extended Unsigned): Multiplicand (8 bit) + multiplier (8 bit) = Product (16 bit), or Multiplicand (16 bit) + multiplier (16 bit) = Product (32 bit)

DIVXU (Divide Extended Unsigned): Dividend (16 bit) + divisor (8 bit) = Quotient (8 bit), Remainder (8 bit), or Dividend (32 bit) + divisor (16 bit) = Quotient (16 bit), Remainder (16 bit)

MULXS (Multiply Extended Signed): Multiplicand (8 bit) + multiplier (8 bit) = Product (16 bit), or Multiplicand (16 bit) + multiplier (16 bit) = Product (32 bit)

DIVXS (Divide Extended Signed): Dividend (16 bit) + divisor (8 bit) = Quotient (8 bit), Remainder (8 bit), or Dividend (32 bit) + divisor (16 bit) = Quotient (16 bit), Remainder (16 bit)

Figure 2.8 shows examples of MULXU, DIVXU, MULXS, and DIVXS.

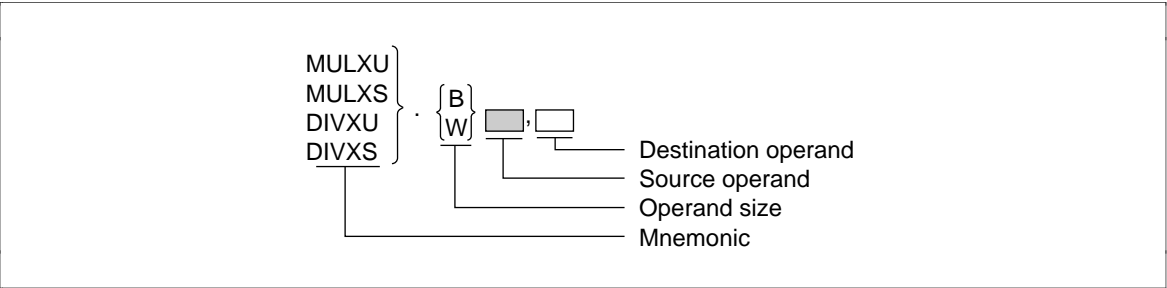


Figure 2.8 MULXU, DIVXU, MULXS, DIVXS

Table 2.8 MULXU, DIVXU, MULXS, DIVXS

Mnem- onic	Op. Size	Source Operand	Destination Operand	Description
MULXU MULXS	B	RnH or RnL	Rm or Em	<div>Product H'xxxx</div> <div><div>15870</div><div><div><div></div><div>H'xx</div></div><div><div></div><div>H'xx</div></div></div><div>Rm or EmRnH or RnL</div><div>\times</div><div><div>70</div><div>H'xx</div></div><div>=</div></div>
	W	Rn or En	ERm	<div>Product H'xxxxxxxx</div> <div><div>3116150</div><div><div><div></div><div>H'xxxx</div></div><div><div></div><div>H'xxxx</div></div></div><div>ERmRn or En</div><div>\times</div><div><div>150</div><div>H'xxxx</div></div><div>=</div></div>
DIVXU DIVXS	B	RnH or RnL	Rm or Em	<div>Remainder H'xx</div> <div>Quotient H'xx</div> <div><div>15870</div><div><div><div></div><div>H'xxxx</div></div><div><div></div><div>H'xx</div></div></div><div>Rm or EmRnH or RnL</div><div>\div</div><div><div>70</div><div>H'xx</div></div><div>=</div></div>
	W	Rn or En	ERm	<div>Quotient H'xxxx</div> <div>Remainder H'xxxx</div> <div><div>3116150</div><div><div><div></div><div>H'xxxxxxxx</div></div><div><div></div><div>H'xxxx</div></div></div><div>ERmRn or En</div><div>\div</div><div><div>150</div><div>H'xxxx</div></div><div>=</div></div>

2.2.7 CMP

CMP (Compare): Compares pairs of 8-bit, 16-bit, or 32-bit data (figure 2.9).

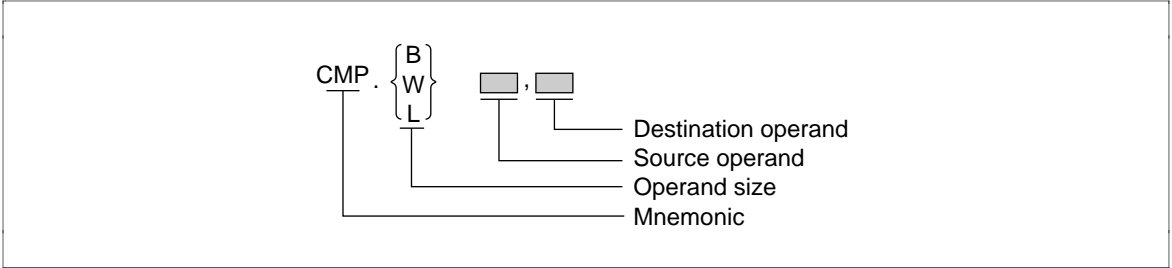
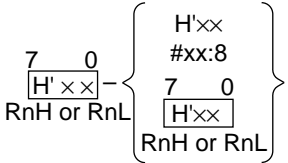
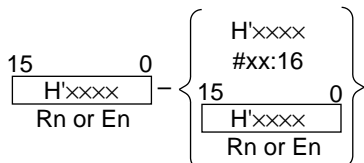
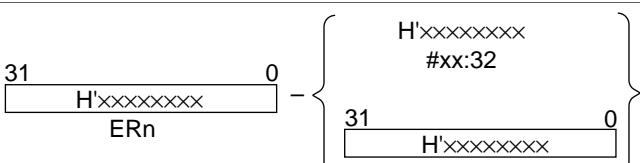


Figure 2.9 CMP

Table 2.9 CMP

Mnem- onic	Op. Size	Source Op.	Dest. Op.	Description
CMP	B	#xx:8 RnH or RnL	RnH or RnL	
W	#xx:16 or Rn or En		Rn or En	
L	#xx:32 or ERn		ERn	

2.2.8 NEG

NEG (Negate): Takes the two complement of 8-bit registers RnH and RnL, 16-bit registers Rn and En, and 32-bit register ERn. (figure 2.10)

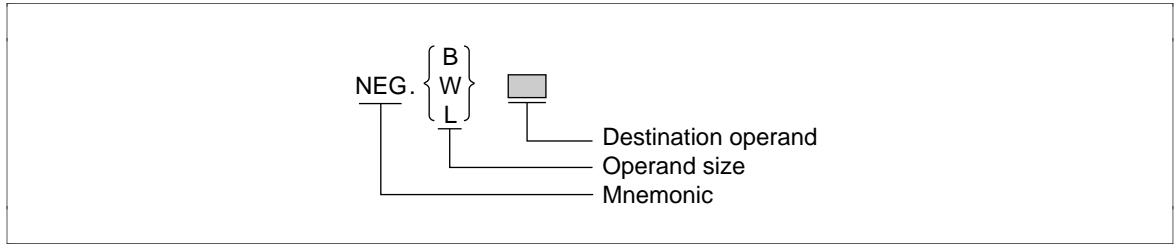





Figure 2.10 NEG

Table 2.10 NEG

Mnem- onic	Op. Size	Destination Operand	Description
NEG	B	RnH or RnL	
W		Rn or En	
L		ERn	

2.2.9 EXTS, EXTU

EXTS (Extend as Signed): Sign-extends from 8 bit to 16 bit or from 16 bit to 32 bit (figure 2.11).

EXTU (Extend as Unsigned): Zero-extends from 8 bit to 16 bit or from 16 bit to 32 bit (figure 2.11).

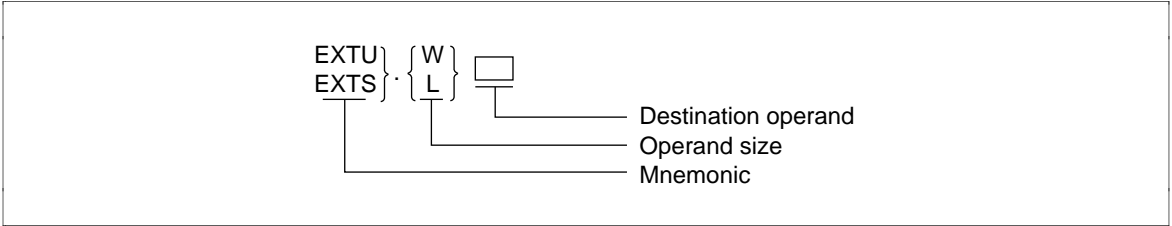


Figure 2.11 EXTS, EXTU

Table 2.11 EXTS, EXTU

Mnem- onic	Op. Size	Destination Operand	Description
EXTU	W	Rn or En	Zero extended <div><div>15870</div><div>H' 00H' x x</div></div> <div>Rn or En</div>
	L	ERn	Zero extended <div><div>3116150</div><div>H' 0000H' x x x x</div></div> <div>ERn</div>
EXTS	W	Rn or En	Sign extended When positive <div><div>15870</div><div>H' 00H' x x</div></div> <div>Rn or En</div>
			Sign extension When negative <div><div>15870</div><div>H' FFH' x x</div></div> <div>Rn or En</div>
	L	ERn	Sign extended When positive <div><div>3116150</div><div>H' 0000H' x x x x</div></div> <div>ERn</div>
			Sign extension When negative <div><div>3116150</div><div>H' FFFFH' x x x x</div></div> <div>ERn</div>

2.3 Logic Operation Instructions

2.3.1 AND, OR, XOR, NOT

AND (And logical): Takes the logical product of pairs of 8-bit, 16-bit, or 32-bit data (figure 2.12).

OR (Inclusive Or Logical): Takes the logical sum pairs of 8-bit, 16-bit, or 32-bit data (figure 2.12).

XOR (Exclusive Or Logical): Takes the exclusive logical sum of pairs of 8-bit, 16-bit, or 32-bit data (figure 2.12).

NOT (NOT = Logical Complement): Logically inverts pairs of 8-bit, 16-bit, or 32-bit data(figure 2.12).

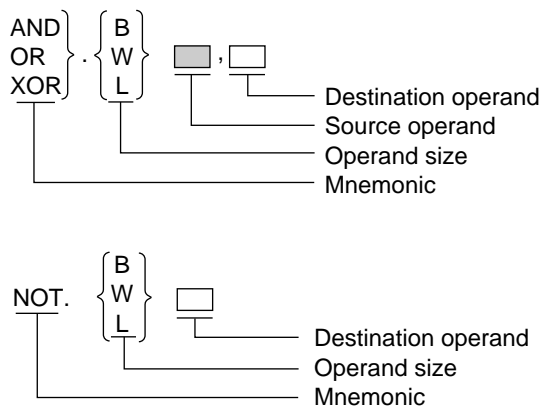


Figure 2.12 AND, OR, XOR, NOT

Table 2.12 AND, OR, XOR, NOT

Mnem- onic	Op. Size	Dest. Op.	Source Op.	Description
AND OR XOR	B	RmH or RmL	#xx:8 or RnH or RnL	
	W	Rm or Em	#xx:16 or Rn or En	
	L	ERm	#xx:32 or ERn	
NOT	B	RmH or RmL	—	
	W	Rm or Em	—	
	L	ERm	—	

2.4 Shift Instructions

2.4.1 SHAL, SHAR, SHLL, SHLR, ROTL, ROTR, ROTXL, ROTXR

The contents of 8-bit, 16-bit, and 32-bit registers can be shifted in the eight ways shown below (figure 2.13).

SHAL (Shift Arithmetic Left): Does an arithmetic shift 1 bit left.

SHAR (Shift Arithmetic Right): Does an arithmetic shift 1 bit right.

SHLL (Shift Logical Left): Does a logical shift 1 bit left.

SHLR (Shift Logical Right): Does a logical shift 1 bit right.

ROTL (Rotate Left): Rotates 1 bit left.

ROTR (Rotate Right): Rotates 1 bit right.

ROTXL (Rotate with eXtend carry Left): Rotates 1 bit left including the C flag.

ROTXR (Rotate with eXtend carry Right): Rotates 1 bit right including the C flag.

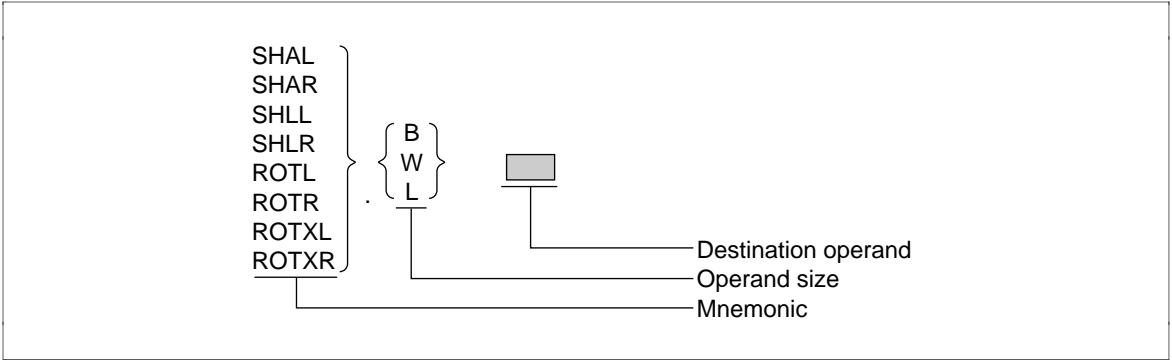










Figure 2.13 SHAL, SHAR, SHLL, SHLR, ROTL, ROTR, ROTXL, ROTXR

Table 2.13 SHAL, SHAR, SHLL, SHLR, ROTL, ROTR, ROTXL, ROTXR

Mnem- onic	Destination Operand	Description
SHAL	RnH or RnL, Rn or En, ERn	
SHAR		
SHLL		
SHLR		
ROTL		
ROTR		
ROTXL		
ROTXR		

2.5 Bit Manipulation Instructions

2.5.1 BSET, BCLR, BNOT, BTST, BLD, BILD, BST, BIST, BAND, BIAND, BOR, BIOR, BXOR, BIXOR

Bit data can be accessed in the format of the nth bit ($n = 0, 1, 2, \dots, 7$) of the 8-bit data in the 8-bit registers (R0H–R7H, R0L–R7L) or on memory. The bit numbers for such accesses are specified as 3-bit immediate data or 8-bit register contents (lower 3 bits) (figure 2.14).

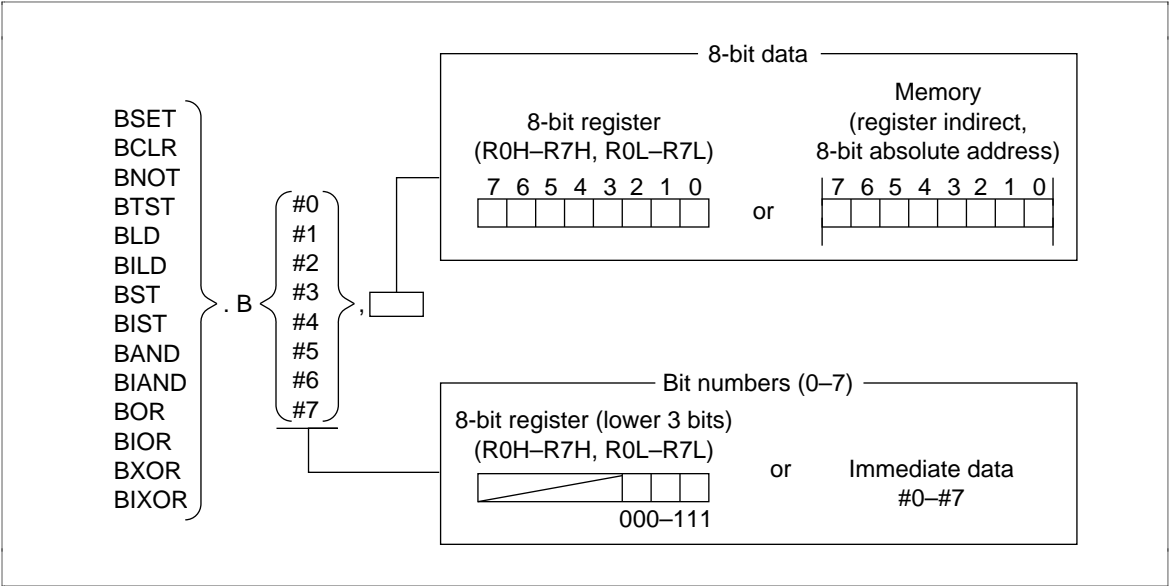


Figure 2.14 BSET, BCLR, BNOT, BTST, BLD, BILD, BST, BIST, BAND, BIAND, BOR, BIOR, BXOR, BIXOR

Table 2.14 BSET, BCLR, BNOT, BTST, BLD, BILD, BST, BIST, BAND, BIAN, BOR, BIOR, BXOR, BIXOR

























Category	Mnemonic (Full Name)	Description	
Bit set	BSET (Bit set)	Sets the specified bit to 1.	Specified bit 1 → 
Bit clear	BCLR (Bit clear)	Clears the specified bit to 0.	Specified bit 0 → 
Bit inversion	BNOT (Bit not)	Inverts the specified bit.	Specified bit  → 
Bit test	BTST (Bit test)	Transfers the specified bit to the zero flag.	Specified bit Z bit  → 
Bit transfer	BLD (Bit load)	Transfers the specified bit to the carry flag.	Specified bit C bit  → 
	BILD (Bit invert load)	Transfers the inversion of the specified bit to the carry flag.	Specified bit C bit  → 
	BST (Bit store)	Transfers the carry flag to the specified bit.	C bit Specified bit  → 
	BIST (Bit Invert store)	Transfers the inversion of the carry flag to the specified bit.	C bit Specified bit  → 
Bit AND	BAND (Bit and)	Takes the AND of the specified bit and the carry flag and transfers the result to the carry flag.	Specified bit C bit C bit  ∧  → 
	BIAND (Bit invert and)	Takes the AND of the inversion of the specified bit and the carry flag and transfers the result to the carry flag.	Specified bit C bit C bit  ∧  → 

Table 2.14 BSET, BCLR, BNOT, BTST, BLD, BILD, BST, BIST, BAND, BIAN, BOR, BIOR, BXOR, BIXOR (cont)

Cate- gory	Mnem- onic (Full Name)	Description	
Bit OR	BOR (Bit inclusive or)	Takes the OR of the specified bit and the carry flag and transfers the result to the carry flag.	Specified bit C bit C bit 
	BIOR (Bit invert inclusive or)	Takes the OR of the inversion of the specified bit and the carry flag and transfers the result to the carry flag.	Specified bit C bit C bit 
Bit exclusive Or	BXOR (Bit exclusive or)	Takes the exclusive OR of the specified bit and the carry flag and transfers the result to the carry flag.	Specified bit C bit C bit 
	BIXOR (Bit invert exclusive or)	Takes the exclusive OR of the inversion of the specified bit and the carry flag and transfers the result to the carry flag.	Specified bit C bit C bit 

2.6 Branch Instructions

2.6.1 Bcc

Bcc (Branch Conditionally): This instruction branches when a condition is met (figure 2.15).

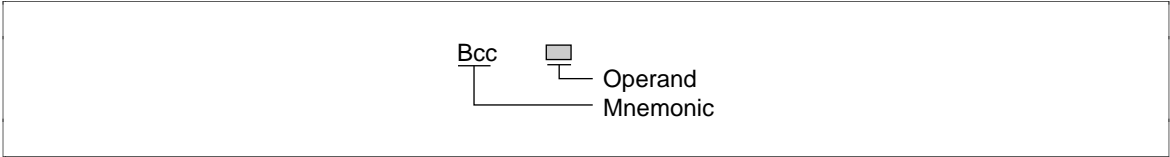


Figure 2.15 Bcc

Table 2.15 Bcc

Mnem- onic	Operand	Description
Bcc	d:8 or d:16	When the condition is met, the displacement (signed 8 bit or 16 bit) to the branch
<div><div><div>23</div><div>H'xxxxxx</div><div>0</div></div><div>PC</div><div>+ H'xx</div><div>d:8</div><div>=</div></div> <div><div><div>23</div><div>H'xxxxxx</div><div>0</div></div><div>PC</div><div>+ H'xxxx</div><div>d:16</div><div>=</div></div>		

Mnemonic	Description	Branch Condition
BRA (BT)	Always (True)	Always
BRN (BF)	Never (False)	never
BHI	High	CVZ = 0
BLS	Low or same	CVZ = 1
BCC(BHS)	Carry clear (high or same)	C = 0
BCS(BLO)	Carry set (Low)	C = 1
BNE	Not equal	Z = 0
BEQ	Equal	Z = 1
BVC	Overflow clear	V = 0
BVS	Overflow set	V = 1
BPL	Plus	N = 0
BMI	Minus	N = 1
BGE	Greater or equal	N ⊕ V = 0
BLT	Less than	N ⊕ V = 0
BGT	Greater than	ZV(N ⊕ V) = 0
BLE	Less or equal	ZV(N ⊕ V) = 0

2.6.2 JMP

JMP (Jump): Jumps unconditionally to branch destination (figure 2.16).








Figure 2.16 JMP

Table 2.16 JMP

Mnem- onic	Operand	Description
JMP	@ERn or @aa:24 or @@aa:8	Branch destination address transferred to PC
	@ERn	
	@aa:24	
	@@aa:8	
		

2.6.3 BSR, JSR


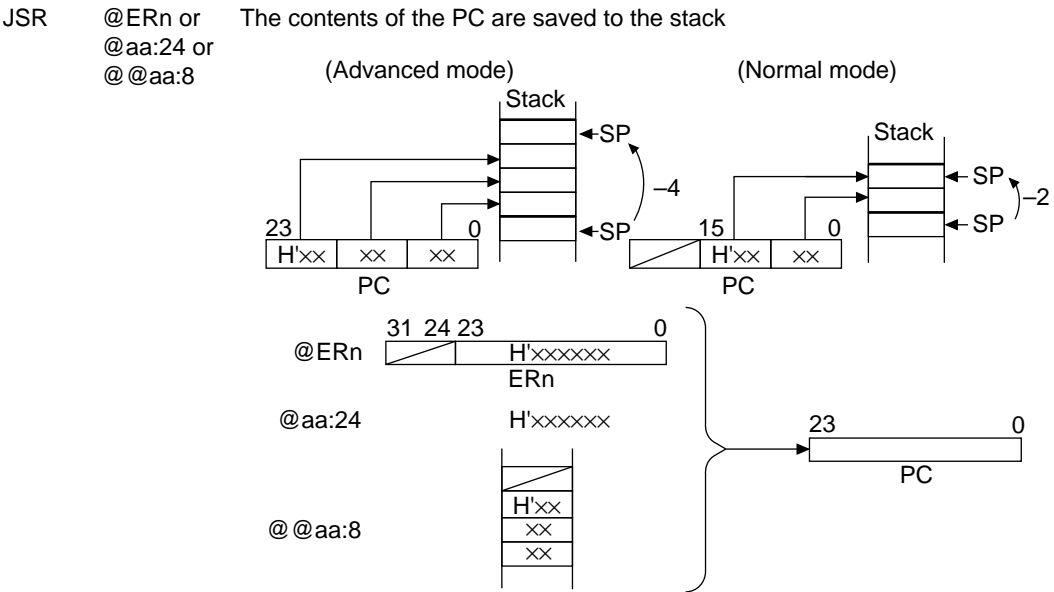
JSR (Jump to Subroutine, BSR (Branch to Subroutine): Instructions that jump to subroutines (figure 2.17).



Figure 2.17 BSR, JSR

Table 2.17 BSR, JSR

Mnem- onic	Operand	Description
BSR	d:8 or d:16	The contents of the PC are saved to the stack and the displacement (signed 8 bit or signed 16 bit) tot he subroutine start destination is added to the PC contents

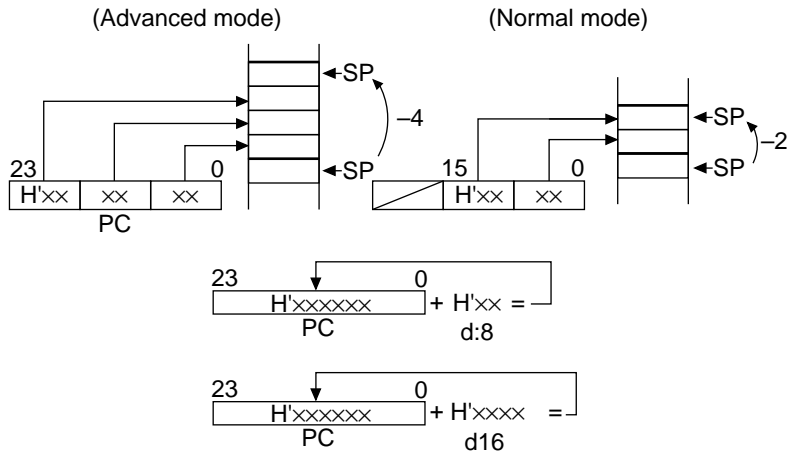

2.6.4 RTS

RTS (Return from Subroutine): Returns from a subroutine (figure 2.18).

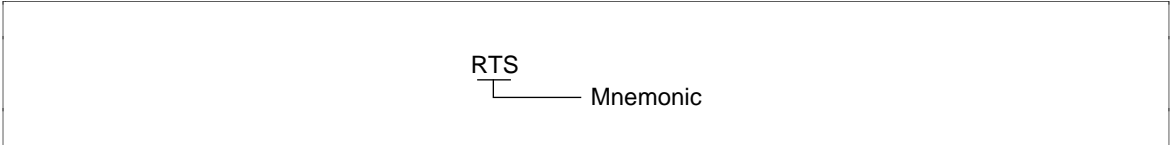
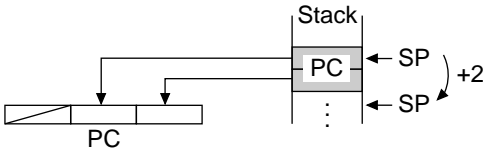
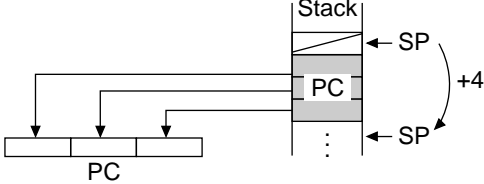


Figure 2.18 RTS

Table 2.18 RTS

Mnem-onic	Op. Size	Source Operand	Destination Operand	Description
RTS	—	—	—	<p>When jumping to a subroutine using BSR or JSR, the contents of the PC saved in the stack are transferred back to the PC. After the transfer, the stack pointer is incremented (+2 for normal mode and +4 for advanced mode</p> <p>(Normal mode)</p>  <p>(Advanced mode)</p> 

2.7 System Control Instructions

2.7.1 RTE


RTE (Return from Exception): Returns for exception processing program. (figure 2.19)



Figure 2.19 RTE

Table 2.19 RTE

Mnem- onic	Op. Size	Source Op.	Dest. Op.	Description
RTE	—	—	—	When a hardware interrupt or software interrupt (TRAPA instruction) occurs, the CCR and PC automatically saved to the stack by the hardware are returned from the stack

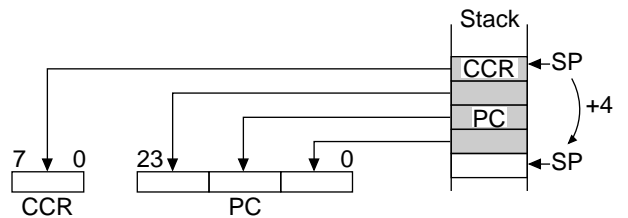

2.7.2 SLEEP

SLEEP (Sleep): The SLEEP instruction places the CPU in power-down status (figure 2.20). In power-down status, the internal state of the CPU is maintained and instruction execution halted to wait for a request for exception processing to occur. When a request for exception processing does occur, the power-down state is cleared and the CPU begins exception processing. Any interrupt requests other than NMI will be masked on the CPU side at this time so the power-down status will not be cleared.




Figure 2.20 SLEEP

2.7.3 LDC, STC

LDC (Load Data to Control Register): Transfers 8-bit data to the CCR (figure 2.21).

STC (Store from Control Register): Transfers the contents of the CCR to register or memory (figure 2.21).

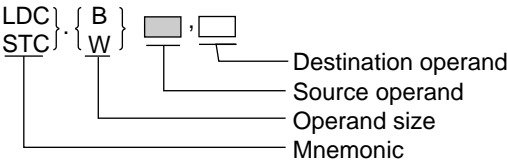
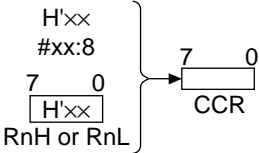
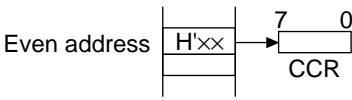




Figure 2.21 LDC, STC

Table 2.20 LDC, STC

Mnem- onic	Op. Size	Destination Operand	Source Operand	Description
LDC	B	#xx:8 or RnH or RnL	CCR	The 8-bit immediate data or the contents of the RnH or RnL 8-bit registers are transferred to the CCR 
	W	@ERn @(d:16,ERn) @(d:24,ERn) @-ERn @aa:8 @aa:16 @aa:24		The contents of the even address are transferred to the CCR 
STC	B	CCR	RnH or RnL	The 8-bit immediate data or the contents of the RnH or RnL 8-bit registers are transferred to the CCR 
	W	@ERn @(d:16,ERn) @(d:24,ERn) @ERn+ @aa:8 @aa:16 @aa:24		The contents of the even address are transferred to the CCR 

2.7.4 ANDC, ORC, XORC

These instructions do logical operations with the contents of the CCR (figure 2.22).

ANDC (AND Control Register): Takes the logical product.

ORC (Inclusive OR Control Register): Takes the logical sum.

XORC (Exclusive OR Control Register): Takes the exclusive logical sum.

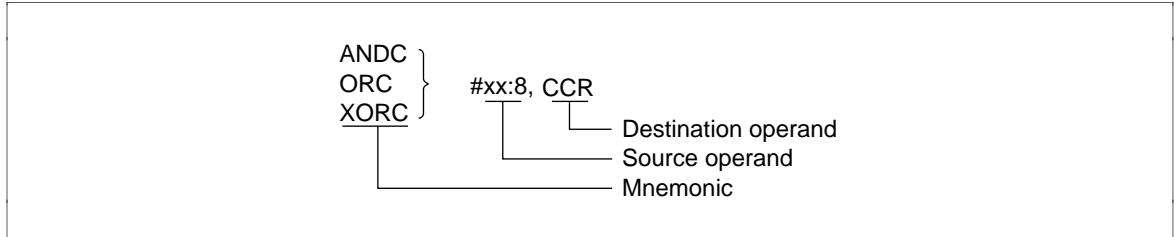



Figure 2.22 ANDC, ORC, XORC

Table 2.21 ANDC, ORC, XORC

Mnem- onic	Op. Size	Destination Operand	Source Operand	Description
ANDC ORC XORC	B	CCR	#xx:8	

2.7.5 NOP

NOP (No Operation): Only increments the PC by 2. No effect on the internal status of the CPU (figure 2.23).



Figure 2.23 NOP

2.7.6 TRAPA

TRAPA (Trap Always): Generates a software interrupt (figure 2.24).

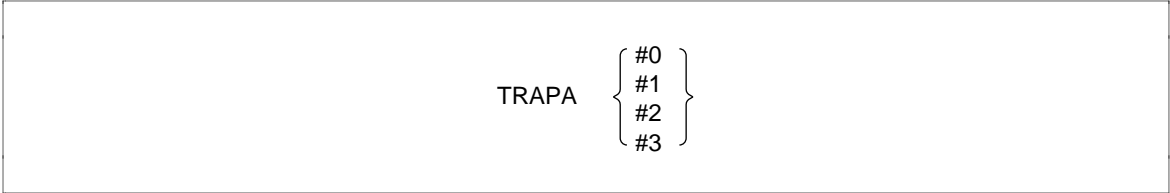


Figure 2.24 TRAPA

Table 2.22 TRAPA

Mnem- onic	Operand	Description
ANDC ORC XORC	#0 or #1 or #2 or #3	CCR and PC saved to stack

The diagram illustrates the stack push operation for TRAPA instructions. It shows the CCR register (H'xx) and the PC register (H'xx, xx, xx) being pushed onto the stack. The stack pointer (SP) is decremented by 4. A separate diagram shows the CCR register with bit 1 set to 1, indicating the interrupt flag.

#xx	Vector Address	
	Normal Mode	Advanced Mode
0	H'0008–H'0009	H'000010–H000013
1	H'000A–H'000B	H'000014–H000017
2	H'000C–H'000D	H'000018–H00001B
3	H'000E–H'000F	H'00001C–H00001F

2.8 Block Transfer Instructions

2.8.1 EEPMOV

EEPMOV (Move data to EEPROM): Transfer block data to any address. No interrupts will be detected during the data transfer (figure 2.25).

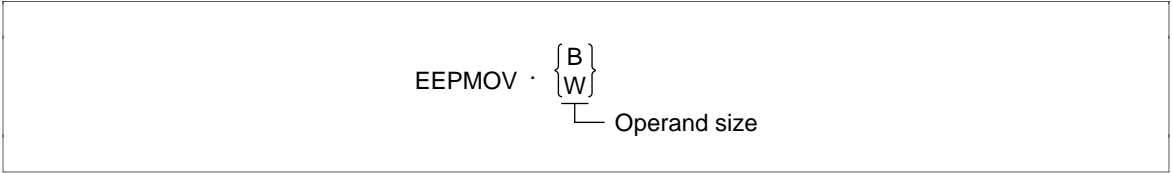


Figure 2.25 EEPMOV

Table 2.23 EEPMOV

Mnem- onic	Op. Size	Description
EEP- MOV	B	Transfers the block data that starts at the address in ER5 to the address in ER6. The maximum block data length is 255 bytes.

Number of bytes to transfer

H'□□

R4L

Transfer source
address

H'xxxxxx


ER5

Transfer destination
address

H'△△△△△△

ER6

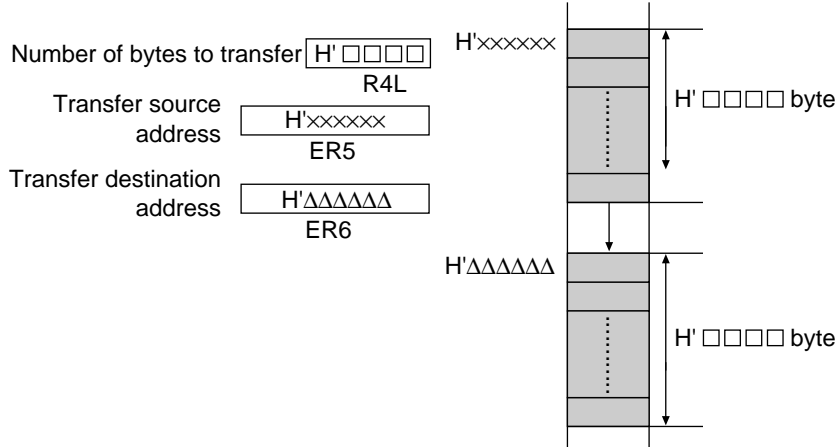W Transfers the block data that starts at the address in ER5 to the address in ER6.
The maximum block data length is 65535 bytes.



Section 3 Load Module Conversion Procedures

Figures 3.1 through 3.4 show the load module conversion procedures for the H8/300H.

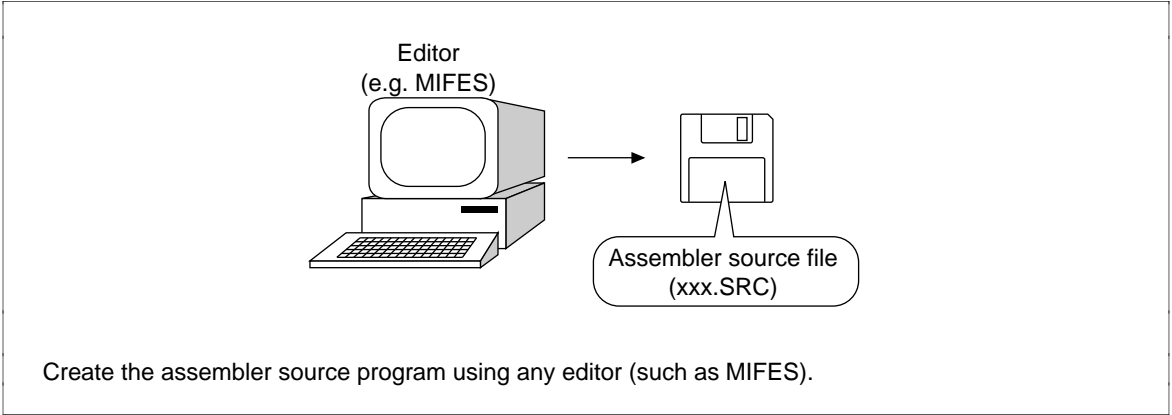


Figure 3.1 Load Module Conversion Procedures (Step 1)

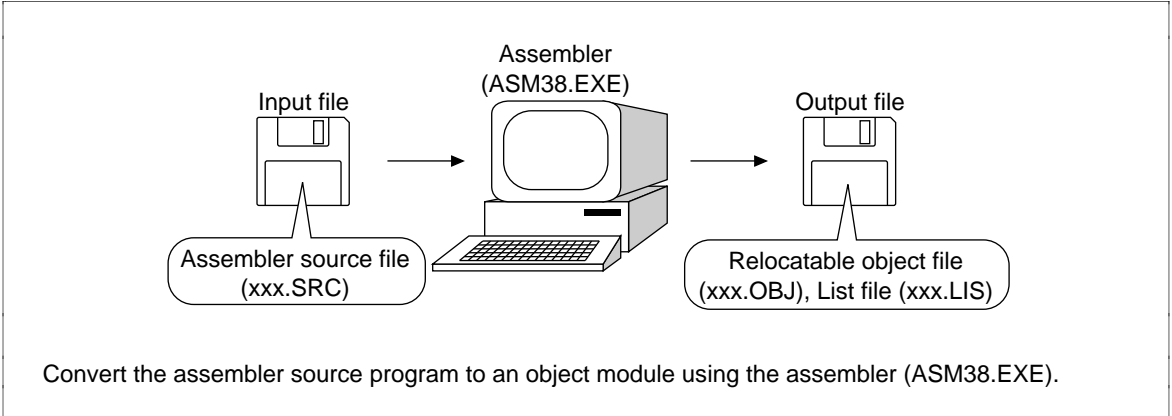


Figure 3.2 Load Module Conversion Procedures (Step 2)


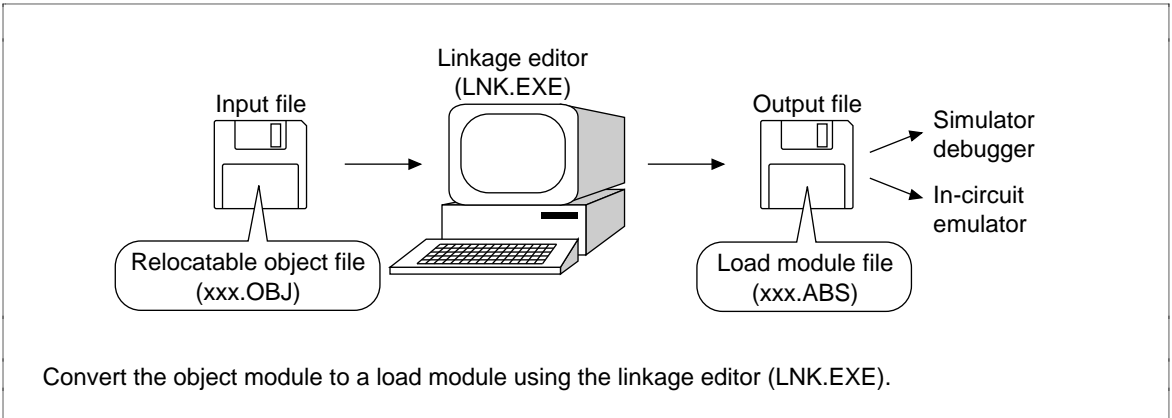


Figure 3.3 Load Module Conversion Procedures (Step 3)

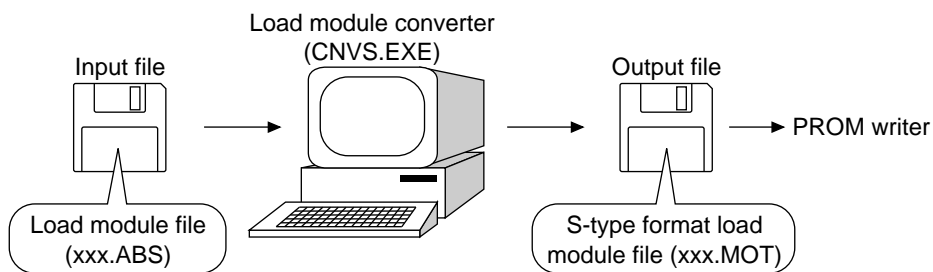

Convert the load module to an S-type format load module using the load module compiler (CNVS.EXE).

Figure 3.4 Load Module Conversion Procedures (Step 4)

Section 4 Examples of Software Applications

4.1 Software Applications Examples

Table 4.1 lists software application examples.

Table 4.1 List of Software Application Examples

Software title	Label	Use	Section
Block transfer	MOVE	MOV.L instruction, post-increment register indirect	4.3
Block transfer using block transfer instruction	EEPMOV	EEPMOV.W instruction	4.4
Branching using a table	CCASE	Register indirect with displacement	4.5
Count of number of logical 1 bits in 8-bit data	HCNT	ROTL.B instruction, ADDX.B instruction	4.6
Find first 1 in 32-bit data	FIND1	SHLL.L instruction	4.7
64-bit binary addition	ADD	ADD.L instruction	4.8
64-bit binary subtraction	SUB	SUB.L instruction	4.9
Unsigned 32-bit binary multiplication	MUL	MULXU.W instruction	4.10
Unsigned 32-bit binary division	DIV	SHLL.L instruction, ROTL.L instruction	4.11
Signed 16-bit binary multiplication	MULXS	MULXS.W instruction	4.12
Signed 32-bit binary multiplication	MULS	MULXU.W instruction	4.13
Signed 32-bit binary division (16-bit divisor)	DIVXS	DIVXS.W instruction	4.14
Signed 32-bit binary division (32-bit divisor)	DIVS	SHLL.L instruction, ROTL.L instruction, NEG.L instruction	4.15
8-digit decimal addition	ADDD	DAA.B instruction	4.16
8-digit decimal subtraction	SUBD	DAS.B instruction	4.17
Product/sum operations	SEKIWA	MULXU.W instruction	4.18
Sorting	SORT	Post-increment register indirect, pre-decrement register indirect	4.19

4.2 Using Software Examples

Sections 4.3 through 4.19 provide detailed information about the software applications listed in table 4.1. The following information is consistent throughout sections 4.3 through 4.19.

- Internal registers:
 - ER0–ER7: 32-bit general registers that link En and Rn n = 0, 1, 2, ... 7.
 - E0–E7: 16-bit extended registers
 - R0–R7: 16-bit general registers that link RnH and RnL n = 0, 1, 2, ... 7.
 - R0H–R7H and R0L–R7L: 8-bit general registers

- Condition code register (shown in figures labeled “Changes in Internal Registers and Flag Changes ...”):
 - C: Carry flag
 - V: Overflow flag
 - Z: Zero flag
 - N: Negative flag
 - U: User bit
 - H: Half carry bit
 - U: User bit
 - I: Interrupt mask bit
- Programming Specifications: Describes the specifications of the software.
 - Program memory bytes.: Indicates the amount of ROM used by the software.
 - Data memory bytes.: Indicates the amount of RAM used by the software.
 - Stack bytes.: Indicates the amount of stack used by the software. This does not include the stack used by subroutine calls in the user program. When executing software, the amount of stack in bytes indicated for the stack area is required, so ensure that the stack requirements are available in the data memory before execution.
 - Number of states: Indicates the number of states in which the software is executed. The execution time of the software is calculated as follows:

$$\text{Execution time (s)} = \text{No. of states} \times \text{Cycle time (s)},$$

where

$$\text{Cycle time (s)} = 1/\text{system clock frequency } \phi \text{ (Hz)},$$

and

$$\text{System clock frequency } \phi \text{ (Hz)} = \text{External pulse generator frequency 2 divider circuit version}/2,$$

or

$$\text{External pulse frequency 1:1 oscillation versions}.$$
 - Re-entrant: Indicates whether the structure can be used simultaneously from multiple programs.
 - Relocation: Indicates whether the software will run normally no matter where in the memory space it is placed.
 - Interrupts during execution: Indicates whether the software will run normally even after an interrupt routine is executed when the software is running. If it won't, inhibit interrupts prior to calling the software.

4.2.1 Program Listing Page Format (Format 4)

The following list explains the format of the programming list software.

1. List line numbers
2. Location counter values
3. Object code
4. Source line numbers

5. Source statements

6. Comments

7–10 Assembler control instructions

Table 4.2 lists the assembler control instructions used by this software. These instructions are described further in Appendix B, Assembler Control Instruction Functions. For control instructions not listed in table 4.2, see the H8/300H Series Cross-Assembler Users Manual.

Table 4.2 Assembler Control Instructions List

Control Instruction	Function
.CPU	Specifies CPU
.SECTION	Specifies section
.EQU	Sets symbol value
.ORG	Sets location counter values
.DATA	Reserves integer data
.RES	Reserves integer data space
.END	End of source program

4.3 Block Transfer

MCU: H8/300H Series

Label Name: MOVE

Functions Used: MOV.L Instruction, Post-Increment Register Indirect

Function: Transfers block data (up to 65535 bytes) to any even address.

Table 4.3 MOVE Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Start address of transfer source	ER0	4
	Start address of transfer destination	ER1	4
	Number of bytes transferred	ER2	2
Output	—	—	—

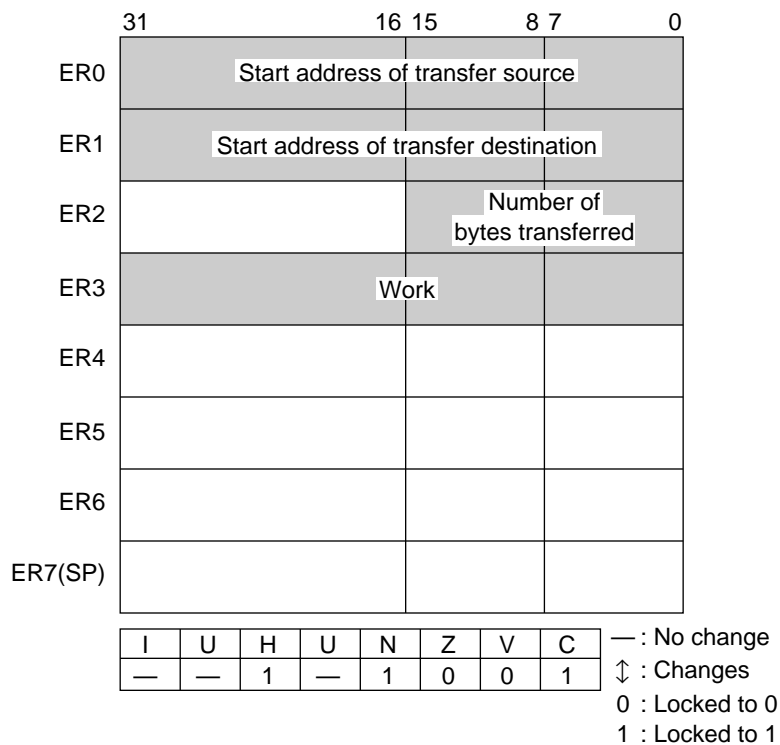


Figure 4.1 Changes in Internal Registers and Flag Changes for MOVE

Program memory (bytes)
38
Data memory (bytes)
0
Stack (bytes)
0
Number of states
491580
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states given in the programming specifications is the value when H'FFFF bytes are being transferred.

Figure 4.2 Programming Specifications

4.3.1 Description of Functions

Arguments are as follows:

- ER0: Sets the start address of the transfer source as the input argument
- ER1: Sets the start address of the transfer destination as the input argument
- R2: Sets the number of bytes to be transferred as the input argument

Figure 4.3 is an example of execution of the software MOVE. When the input arguments are set as shown, the data at the transfer source is transferred as a block to the transfer destination (results).

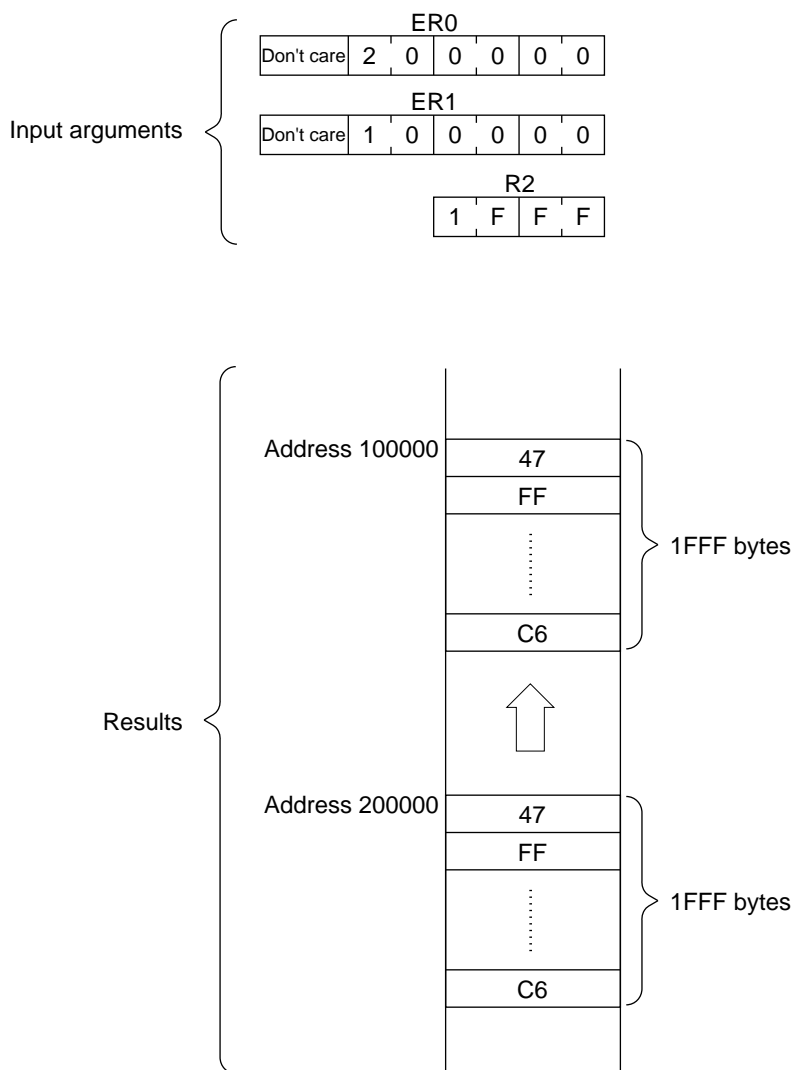


Figure 4.3 Executing MOVE

4.3.2 Cautions for Use

- Since R2 is 2 bytes, set data in the region $H'0001 \leq R2 \leq H'FFFF$.
- Set the input arguments so that the block data of the transfer source (area (A) of figure 4.4) and the block data of the transfer destination (area (B) of the figure) do not overlap.
- When the transfer source and transfer destination overlap as shown in figure 4.4, the data of the transfer source that overlaps (area (C) in the figure) is destroyed.

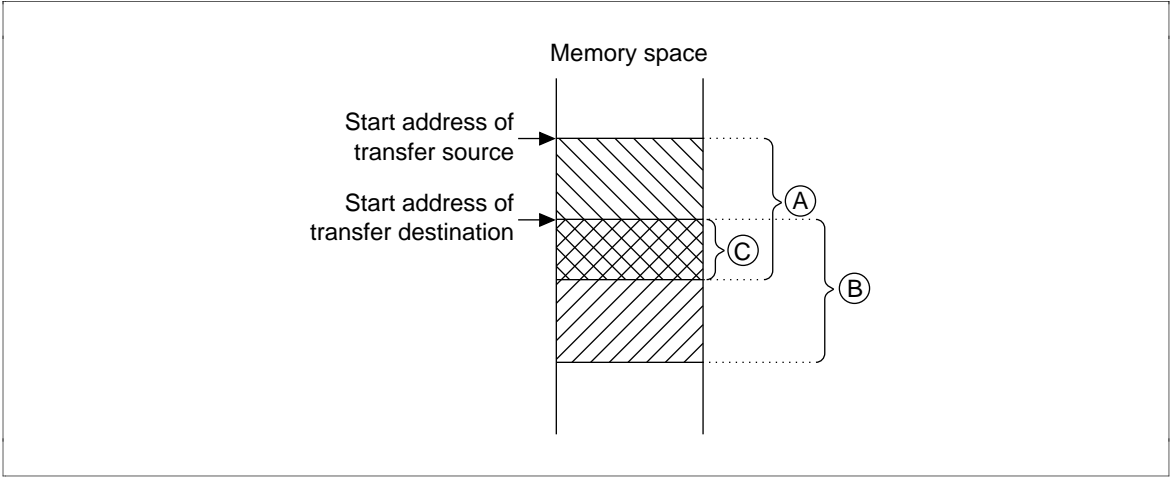


Figure 4.4 Block Transfer with Overlapping Data

4.3.3 Description of Data Memory

No data memory is used by MOVE.

4.3.4 Examples of Use

After setting the start address of the transfer source, the start address of the transfer destination and the number of bytes to be transferred, do a subroutine call to MOVE.

Table 4.4 Block Transfer Example (MOVE)

Label	Instruction	Action
WORK 1	.RES. L 1	Reserves the data memory area that sets the start address of the transfer source in the user program.
WORK 2	.RES. L 1	Reserves the data memory area that sets the start address of the transfer destination in the user program.
WORK 3	.RES. W 1	Reserves the data memory area that sets the number of bytes to be transferred in the user program.
	MOV. L @WORK1,ER0	Sets the start address of the transfer source as set in the user program as an input argument.
	MOV. L @WORK2,ER1	Sets the start address of the transfer destination as set in the user program as an input argument.
	MOV. L @WORK3, R2	Sets the number of bytes to be transferred as set in the user program as an input argument.
	⋮	Subroutine call to MOVE.
	JSR @MOVE	

4.3.5 Principles of Operation

- When the data to be transferred is 4 bytes or more, the MOV.L instruction is used to do repeated transfers in 4-byte units.
- When the data to be transferred is less than 4 bytes, the software switches to the MOV.B instruction to do transfers in byte units.

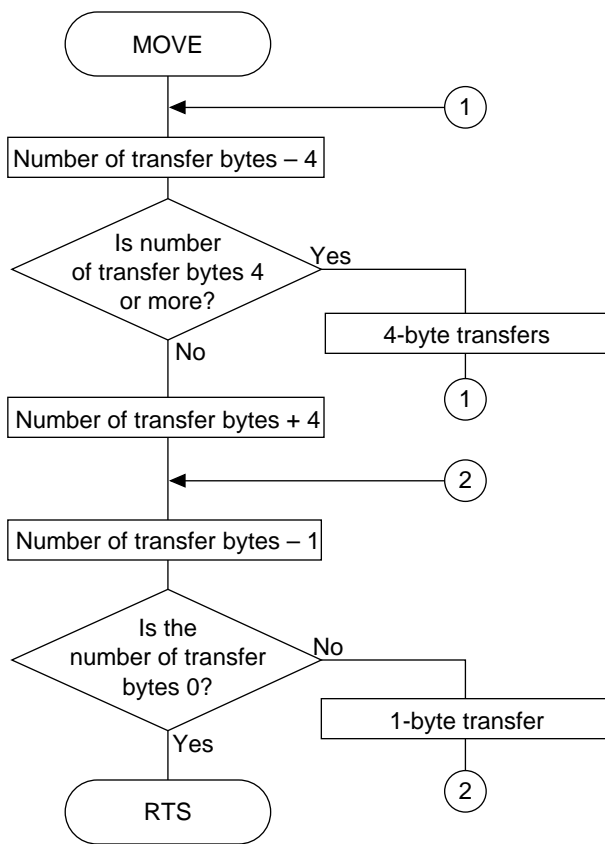


Figure 4.5 MOVE Flowchart

4.3.6 Program Listing

4.4 Block Transfer Using Block Transfer Instruction

MCU: H8/300H Series

Label Name: EEPMOV

Functions Used: EEPMOV.W Instruction

Function: Transfers block data (up to 65535 bytes) to any even address using the block transfer instruction (EEPMOV.W).

Table 4.5 EEPMOV Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Start address of transfer source	ER5	4
	Start address of transfer destination	ER6	4
	Number of bytes transferred	R4	2
Output	—	—	—

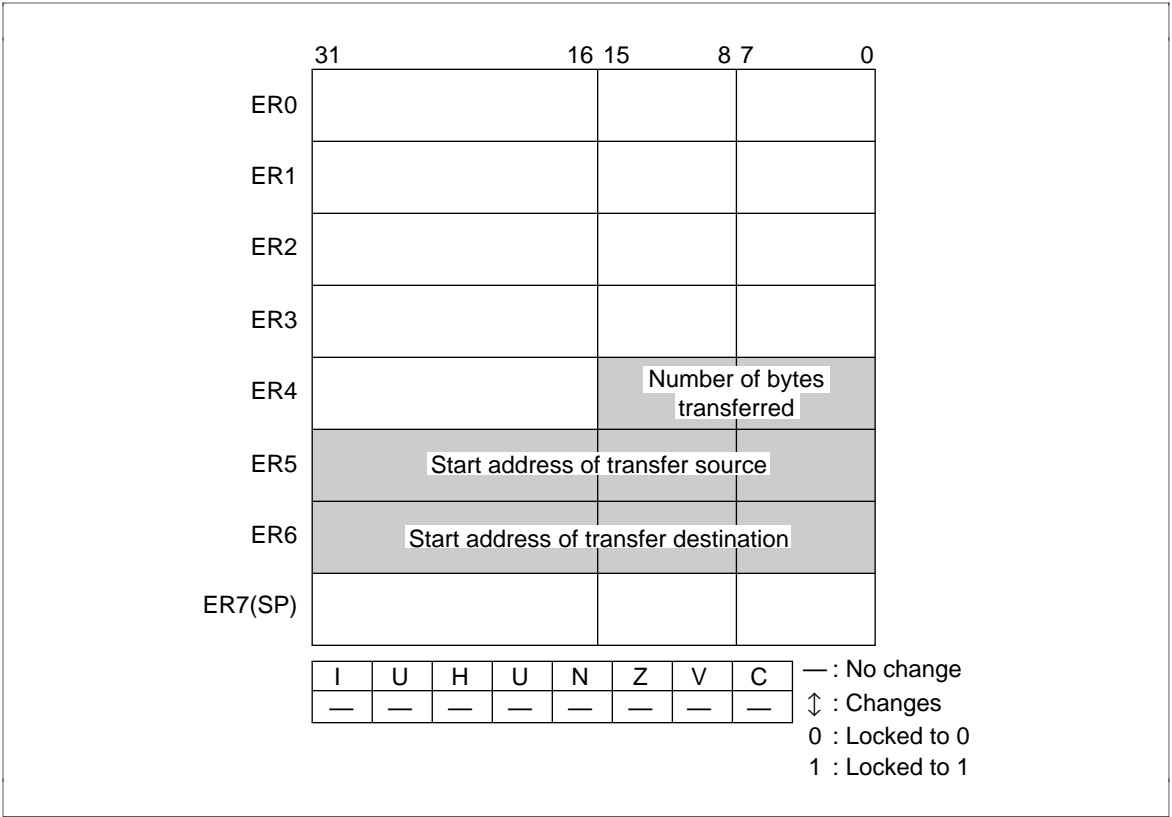


Figure 4.6 Changes in Internal Registers and Flag Changes for EEPMOV

Program memory (bytes)
4
Data memory (bytes)
0
Stack (bytes)
0
Number of states
262148
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states given in the programming specifications is the value when H'FFFF bytes are being transferred.

Figure 4.7 Programming Specifications

4.4.1 Description of Functions

Arguments are as follows:

- ER5: Sets the start address (even address) of the transfer source.
- ER6: Sets the start address (even address) of the transfer destination.
- R4: Sets the number of bytes to be transferred.

Figure 4.8 is an example of execution of the software EEPMOVE. When input arguments are set as shown, the data at the transfer source is transferred as a block to the transfer destination (result).

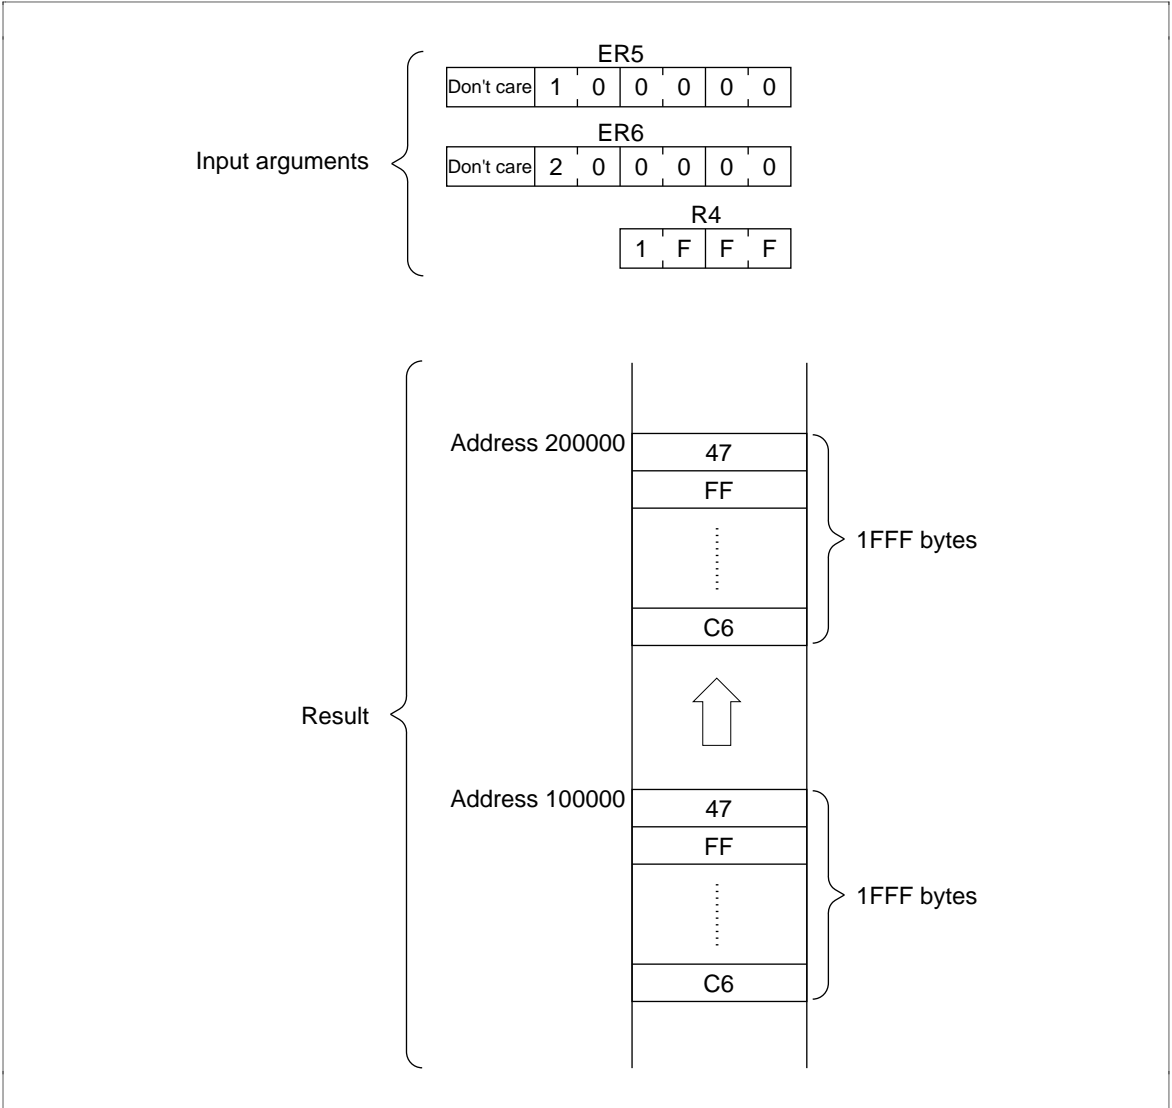


Figure 4.8 Executing EEPMOVE

4.4.2 Cautions for Use

- Since R2 is 2 bytes, set data in the region $H'0001 \leq R2 \leq H'FFFF$.
- Interrupts cannot be detected while EEPMOVE is executing.
- Set the input arguments so that the block data of the transfer source (area (A) of figure 4.9) and the block data of the transfer destination (area (B) of the figure) do not overlap. When the transfer source and transfer destination overlap as shown in figure 4.9, the data of the transfer source that overlaps (area (C) in the figure) is destroyed.

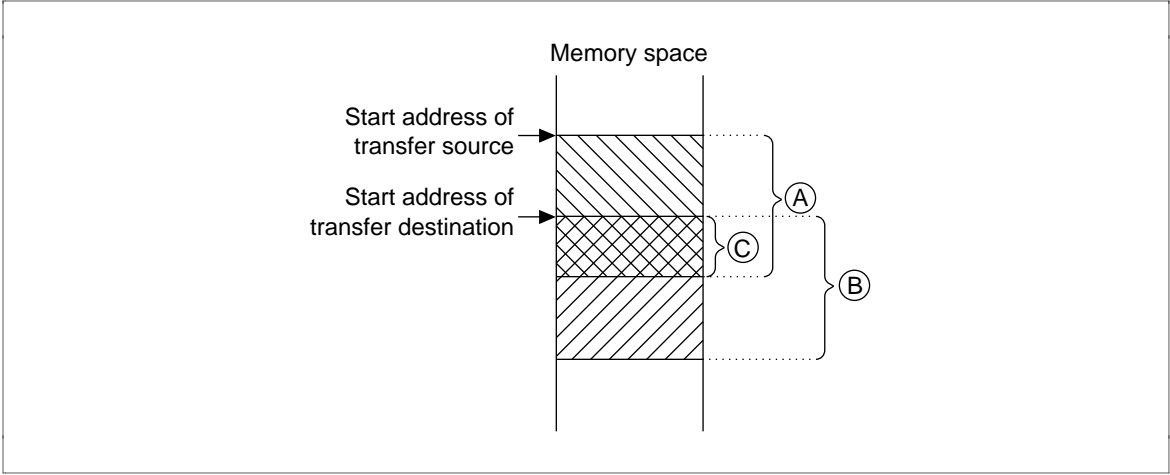


Figure 4.9 Block Transfer with Overlapping Data

4.4.3 Description of Data Memory

No data memory is used by EEPMOVE.

4.4.4 Examples of Use

After setting the start address of the transfer source, the start address of the transfer destination and the number of bytes to be transferred, do a subroutine call to EEPMOVE.

Table 4.6 Block Transfer Example (EEPMOVE).

Label	Instruction	Action
WORK 1	RES. L 1	Reserves the data memory area that sets the start address of the transfer source in the user program.
WORK 2	RES. L 1	Reserves the data memory area that sets the start address of the transfer destination in the user program.
WORK 3	RES. W 1	Reserves the data memory area that sets the number of bytes to be transferred in the user program.
	MOV. L @WORK1,ER5	Sets the start address of the transfer source as set in the user program as an input argument.
	MOV. L @WORK2,ER6	Sets the start address of the transfer destination as set in the user program as an input argument.
	MOV. L @WORK3, R4	Sets the number of bytes to be transferred as set in the user program as an input argument.
	⋮	Subroutine call to EEPMOVE.
	JSR @EEPMOV	

4.4.5 Principles of Operation

Use the block transfer instruction (EEPMOV.W).

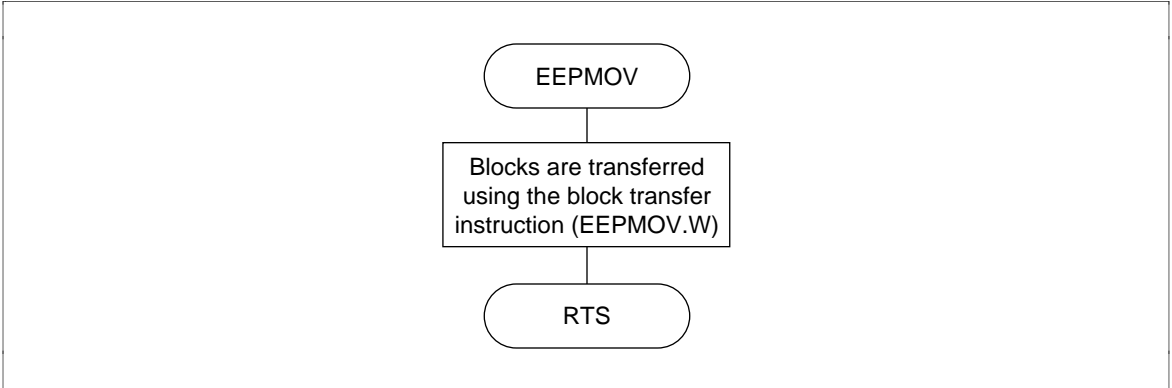


Figure 4.10 EEPMOV Flowchart

4.4.6 Program Listing

4.5 Branching Using a Table

MCU: H8/300H Series

Label Name: CCASE

Functions Used: Register Indirect with Displacement

Description: Searches for the start address of the processing routine for the input command. This function is useful and convenient for decoding commands input from the keyboard and for processing the input command.

Table 4.7 CCASE Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Input command	R0	2
	Start address of data table	ER1	4
Output	Start address of processing routine	ER1	4
	Existence of a processing routine for the input command (yes = 0, no = 1)	Z flag (CCR)	1

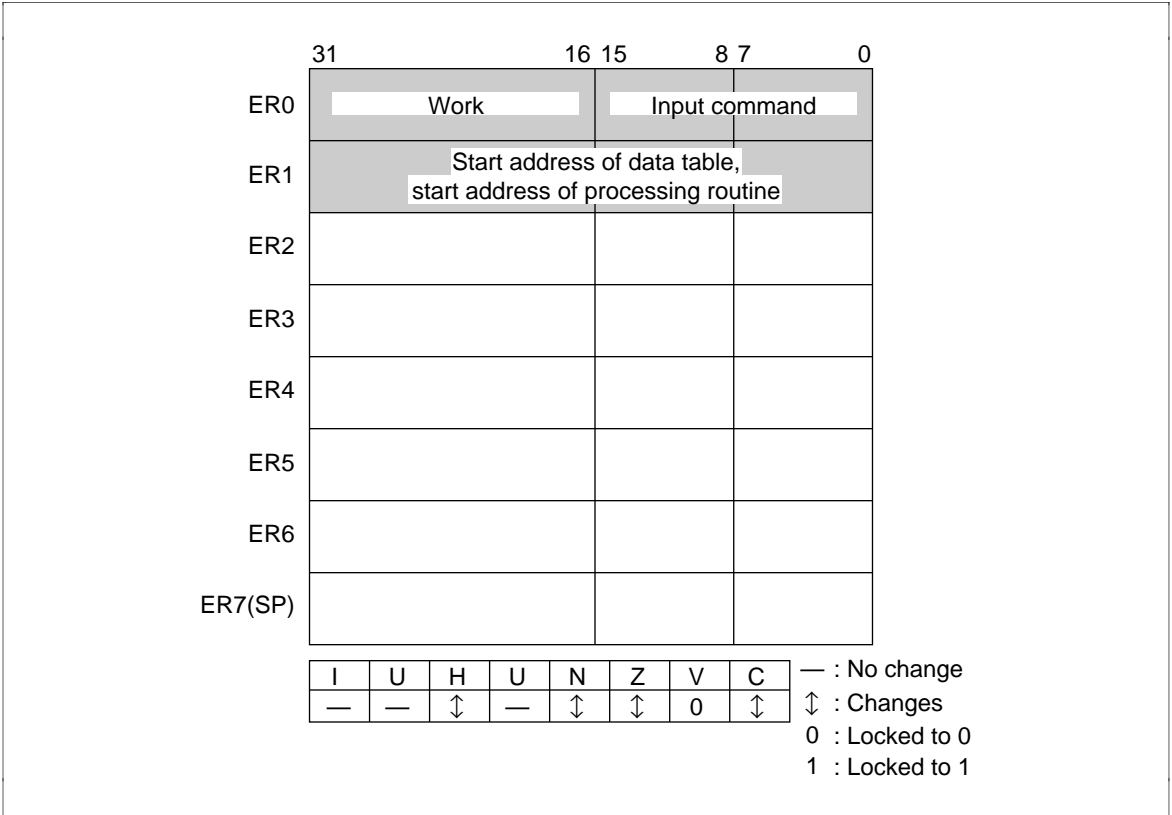


Figure 4.11 Changes in Internal Registers and Flag Changes for CCASE

Program memory (bytes)
26
Data memory (bytes)
0
Stack (bytes)
0
Number of states
156
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states given in the programming specifications is the value when the last of 6 groups of data is detected.

Figure 4.12 Programming Specifications

4.5.1 Description of Functions

Arguments are as follows:

- R0: Sets the 16-bit command as an input argument.
- ER1: Sets the start address of the data table as an input argument. Also set the start address of the processing routine for the command as the output argument.
- Z flag (CCR): Indicates whether there are any errors after execution of CCASE.
 - When Z flag = 0: Indicates that there is a command on the data table that corresponds to the one set in R0.
 - When Z flag = 1: Indicates that there is no command on the data table that corresponds to the one set in R0.

Figure 4.13 is an example of execution of the software CCASE. When the input arguments are set as shown, the data table is checked and the start address of the processing routine is set in ER1.

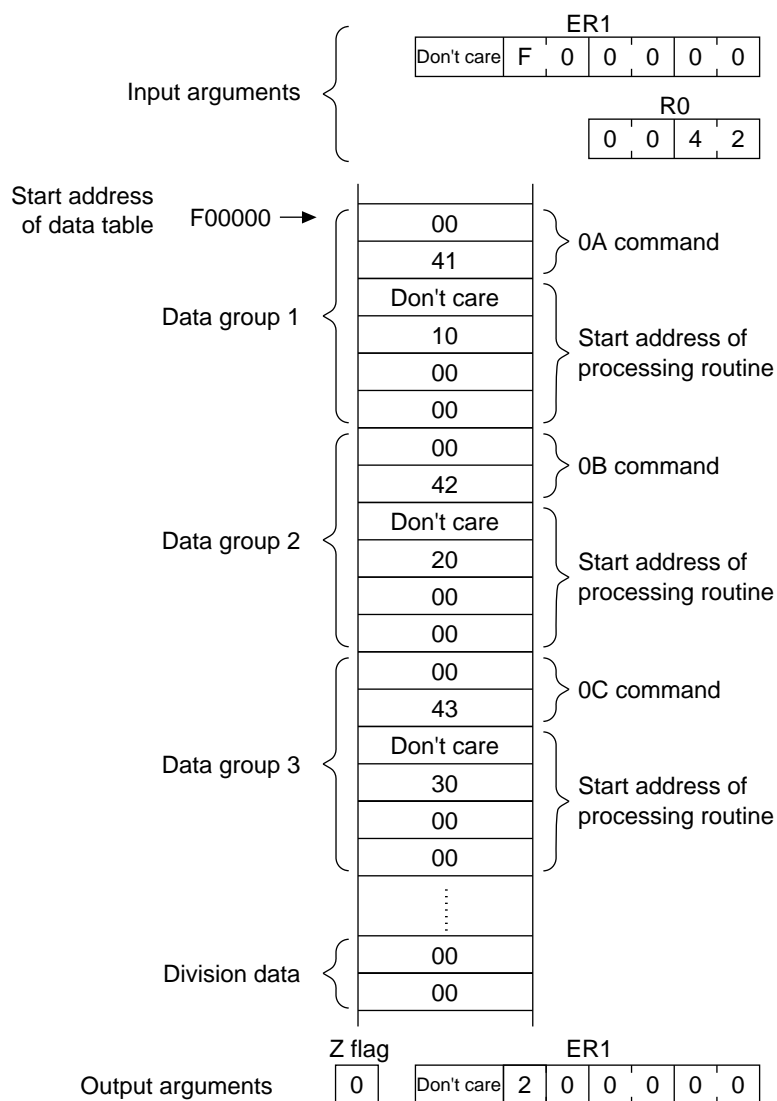


Figure 4.13 Executing CCASE

4.5.2 Cautions for Use

Since H'0000 is used as the division data, do not use H'0000 as a command in the data table.

4.5.3 Description of Data Memory

No data memory is used by CCASE.

4.5.4 Examples of Use

After setting the command and the start address of the data table, do a subroutine call to CCASE.

Table 4.8 Block Transfer Example (CCASE)

Label	Instruction	Action				
WORK 1	.RES. W 1	Reserves the data memory area that sets the command in the user program.				
WORK 2	.RES. L 1	Reserves the data memory area that sets the start address of the data table in the user program.				
	MOV. L @WORK2,ER1	Sets the start address of the data table as set in the user program as an input argument.				
	MOV. W @WORK1,R0	Sets the command set in the user program as an input argument.				
	⋮	Subroutine call of CCASE				
	<table><tr><td></td><td>JSR</td><td>@CCASE</td><td></td></tr></table>		JSR	@CCASE		
	JSR	@CCASE				
	BEQ ERROR	When there is no command in the data table that corresponds to the command input, the routine branches to an error program.				
	<table><tr><td>Program that branches to the processing routine*</td></tr></table>	Program that branches to the processing routine*				
Program that branches to the processing routine*						
	⋮					
ERROR	<table><tr><td>Error program</td></tr></table>	Error program				
Error program						
	⋮					

Table 4.8 **Block Transfer Example (CCASE) (cont)**

Label	Instruction		Action			
DTABLE	.ORG	H'F000	Start address of data table			
	.DATA.W	H'0041	0A command			
	.DATA.W	H'F100	Start address of processing routine for 0A command			
	.DATA.W	H'0042	0B command			
	.DATA.W	H'F200	Start address of processing routine for 0B command			
	.DATA.W	H'0000	Division data			
		Subroutine call of CCASE			
	<table><tr><td></td><td>JSR</td><td>@CCASE</td><td></td></tr></table>			JSR	@CCASE	
	JSR	@CCASE				
	BEQ	ERROR	Branches to ERROR when the Z flag is set			
↑ Bran- ches to pro- cessing routine ↓	JMP	@ER1	Jumps to processing routine			
	ERROR	<table><tr><td></td><td>Error program</td><td></td></tr></table>			Error program	
	Error program					
					

Note: Example of program that branches to a processing routine: CCASE only sets the start address of the processing routine in ER. When actually branching to a processing routine, create a program like that shown below.

4.5.5 Principles of Operation

- ER1 is used as a pointer to the address storing the command on the data table.
- The command at the address indicated in ER1 of the data table is set in E0 and compared to the input command.
- When the input command and the data table command match, the start address of the processing routine located after the command is set, the Z flag is cleared and CCASE ends.
- When H'0000 is detected (indicating the end of the data table), the Z flag is set and CCASE ends.

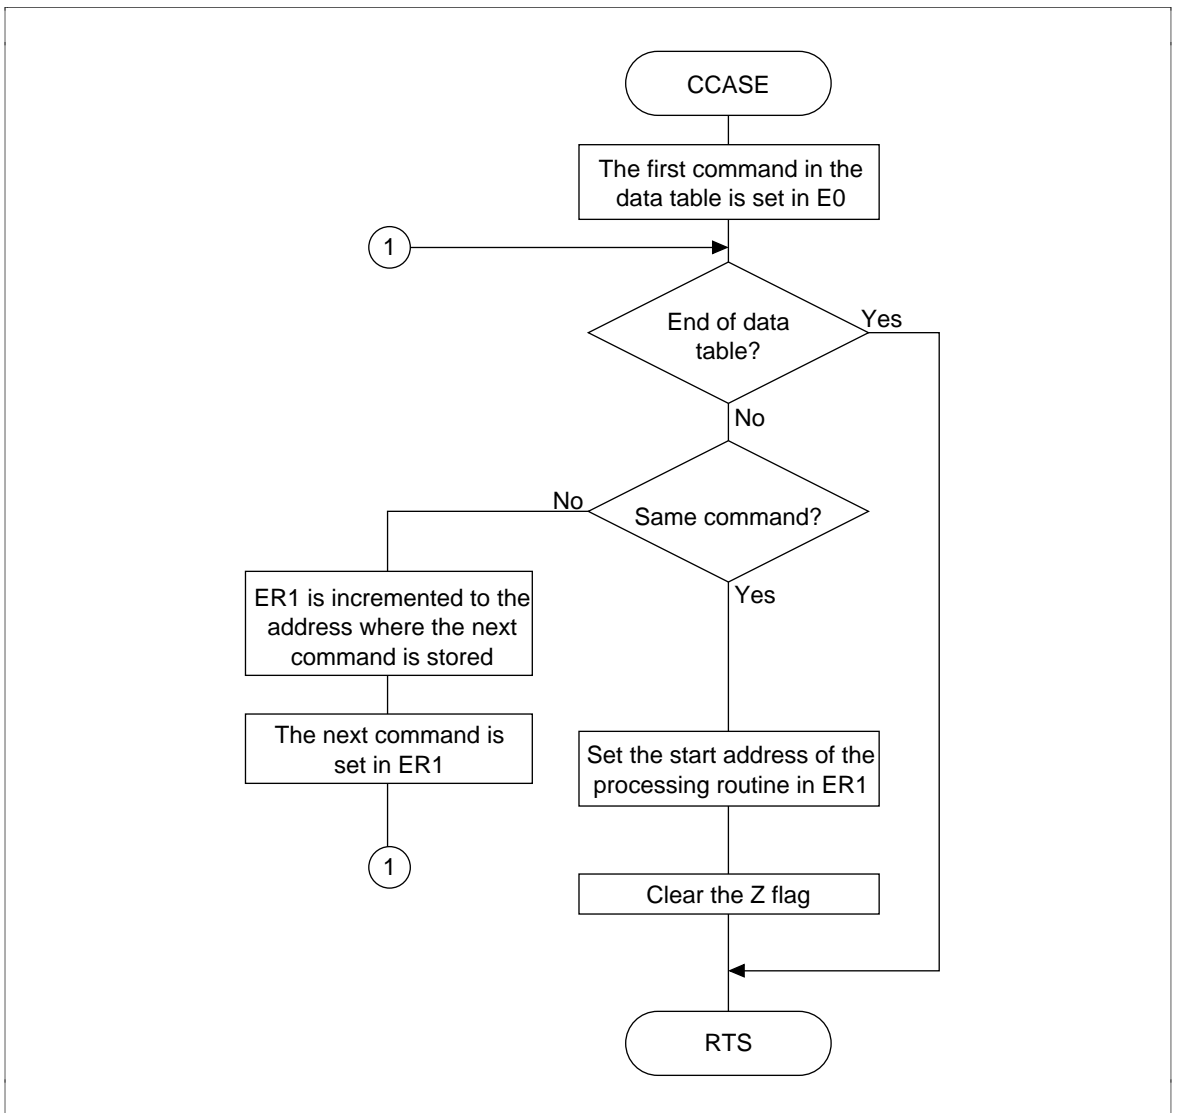


Figure 4.14 CCASE Flowchart

4.5.6 Program Listing

4.6 Counting the Number of Logical 1s in 8-Bit Data

MCU: H8/300H Series

Label Name: HCNT

Functions Used: ROTL.B Instruction, ADDX.B Instruction

Function: Counts the number of logical 1s in 8-bit data.

Table 4.9 HCNT Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	8-bit data	R0L	1
Output	Number of logical 1 bits	R0H	1

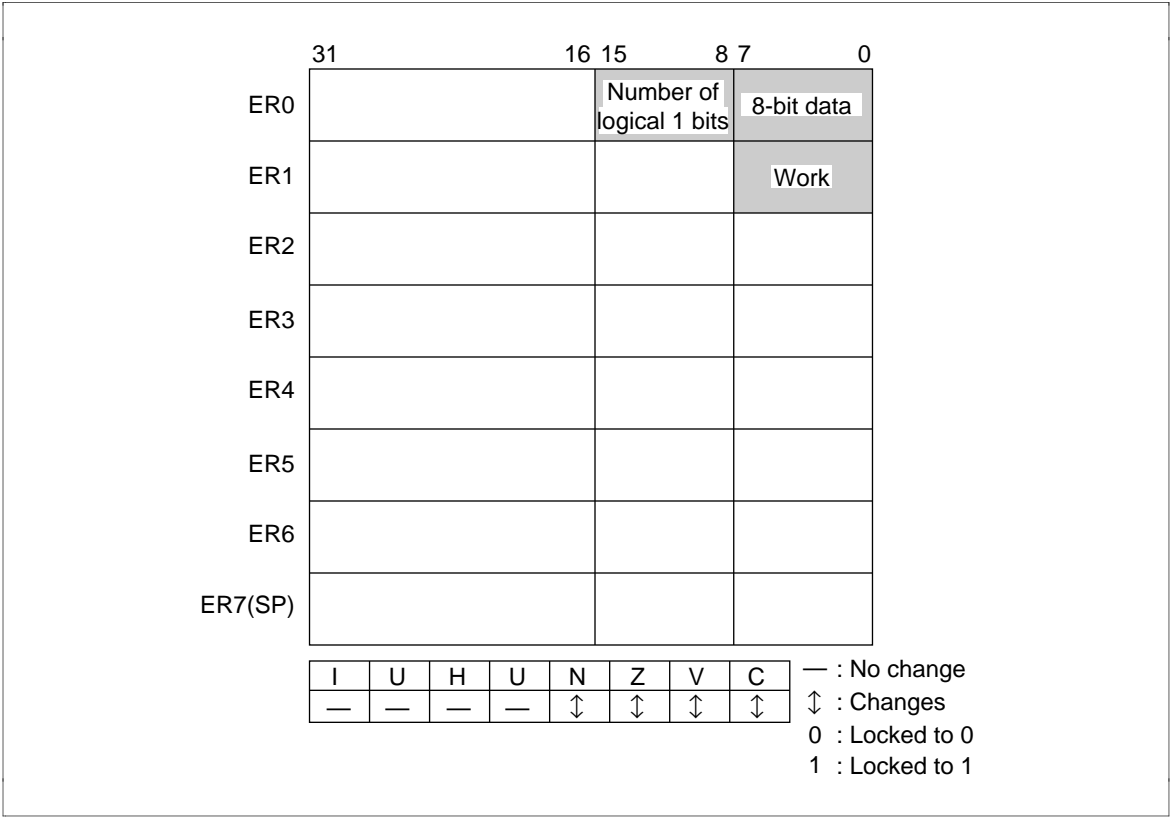


Figure 4.15 Changes in Internal Registers and Flag Changes for HCNT

Program memory (bytes)
16
Data memory (bytes)
0
Stack (bytes)
0
Number of states
126
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states given in the programming specifications is the value when the 8-bit data is H'FF.

Figure 4.16 Programming Specifications

4.6.1 Description of Functions

Arguments are as follows:

- ROL: Sets the 8-bit data.
- ROH: Sets the number of bits of logical 1s in the 8-bit data.

Figure 4.17 is an example of execution of the software HNCT. When the input arguments are set as shown, the number of bits of logical 1s are set in ROH.

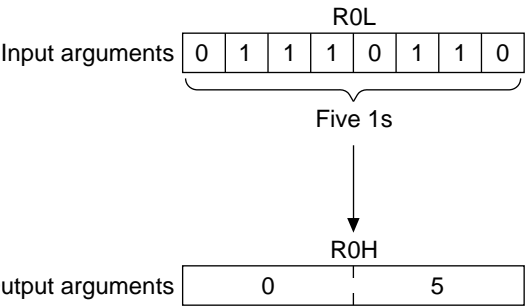


Figure 4.17 Executing HCNT

4.6.2 Cautions for Use

When counting the number of logical 0 bits, first take the 1 complement of R0L and then execute HCNT.

4.6.3 Description of Data Memory

No data memory is used by HNCT.

4.6.4 Examples of Use

After setting the 8-bit data, do a subroutine call to HCNT.

Table 4.10 Block Transfer Example (HCNT)

Label	Instruction	Action				
WORK 1	.RES. B 1	Reserves the data memory area that sets the 8-bit data in the user program.				
WORK 2	.RES. B 1	Reserves the data memory area that sets the number of bits of logical 1s in the 8-bit data in the user program.				
	MOV. L @WORK1,R0L	Sets the 8-bit data as set in the user program as an input argument.				
	⋮	Subroutine call to HCNT.				
	<table border="1"><tr><td></td><td>JSR</td><td>@HCNT</td><td></td></tr></table>		JSR	@HCNT		
	JSR	@HCNT				
	MOV. B R0H,@WORK2	Stores the number of bits of logical 1s set in the output argument in the data memory area of the user program.				

4.6.5 Principles of Operation

- The rotate instruction (ROTL.B) is used and the 8-bit data (R0L) is set 1 bit at a time in the C bit.
- When the logical 1 counter (R0H) is added to 0 using the add instruction with carry (ADDX.B), 1 is added to the logical 1 counter if the C bit is 1 and 0 is added to the logical 1 counter if the C bit is 0.
- The two steps above are repeated until the rotate counter (R1L) becomes 0, which reveals the number of logical 1s in the 8-bit data.

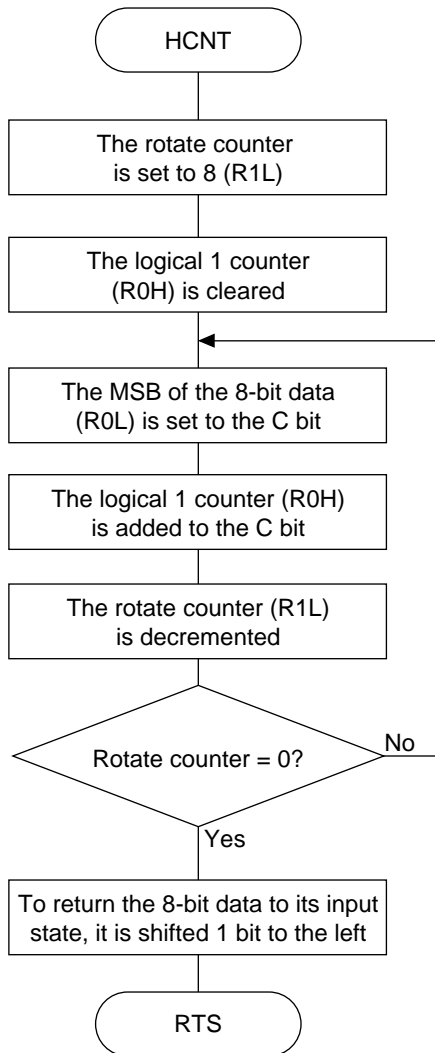


Figure 4.18 HCNT Flowchart

4.6.6 Program Listing

4.7 Find the First 1 in 32-Bit Data

MCU: H8/300H Series

Label Name: FIND1

Functions Used: SHLL.L Instruction

Function: Identifies the bits of 32-bit data in order from bit 31 and finds the number of the first bit that is a 1.

Table 4.11 FIND1 Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	32-bit data	ER0	4
Output	Bit number (bit 31–bit 0)	R1L	1

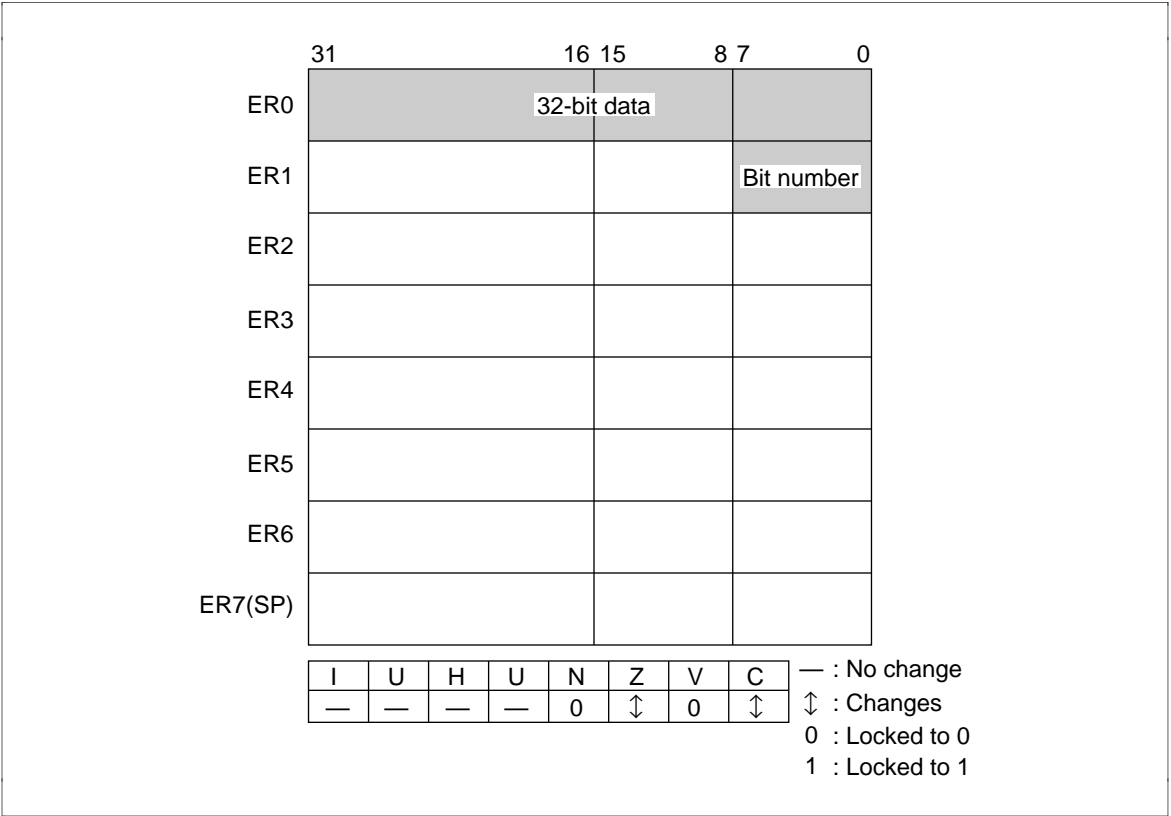


Figure 4.19 Changes in Internal Registers and Flag Changes for FIND1

Program memory (bytes)
14
Data memory (bytes)
0
Stack (bytes)
0
Number of states
398
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states given in the programming specifications is the value when the 32-bit data is H'00000000.

Figure 4.20 Programming Specifications

4.7.1 Description of Functions

Arguments are as follows:

- ER0: Sets the 32-bit data.
- R1L: Sets the number of the first bit found to have a 1 (bit 31 to bit 0).

Figure 4.21 s an example of execution of the software FIND1. When the input arguments are set as shown, the number of the first bit with a 1 is set in R1L.

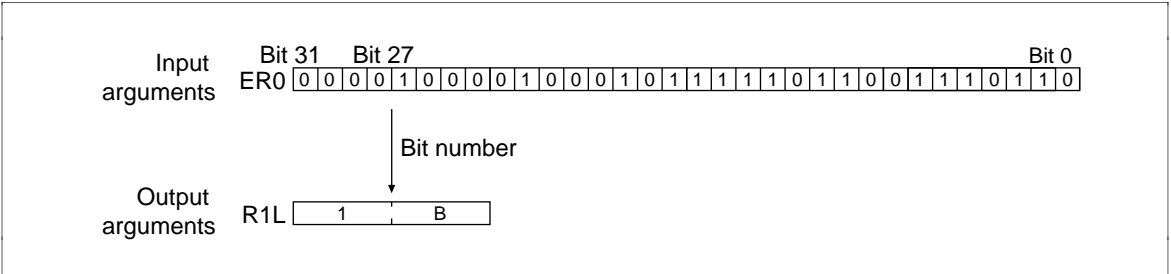


Figure 4.21 Executing FIND1

4.7.2 Cautions for Use

When the 32-bit data is H'00000000, H'FF is set as the bit number (R1L).

4.7.3 Description of Data Memory

No data memory is used by FIND1.

4.7.4 Examples of Use

After setting the 32-bit data, do a subroutine call of FIND1.

Table 4.12 Block Transfer Example (FIND1)

Label	Instruction	Action				
WORK 1	.RES. L 1	Reserves the data memory area that sets the 32-bit data in the user program.				
WORK 2	.RES. B 1	Reserves the data memory area that sets the number of the bit that has the first 1.				
	MOV. L @WORK1,ER0	Sets the 32-bit data set in the user program as an input argument.				
	<table><tr><td></td><td>JSR</td><td>@FIND1</td><td></td></tr></table>		JSR	@FIND1		Subroutine call of FIND1
	JSR	@FIND1				
	MOV. B R0H,@WORK2	Stores the number of the first bit set in the output argument that has a 1 in the data memory area of the user program.				

4.7.5 Principles of Operation

- The SHLL.L instruction stores the bits of 32-bit data in the C bit in order from bit 31 in order to identify the bits.
- When the C bit becomes 1, the counter for finding the bit number (R1L) is decremented and FIND1 ends.

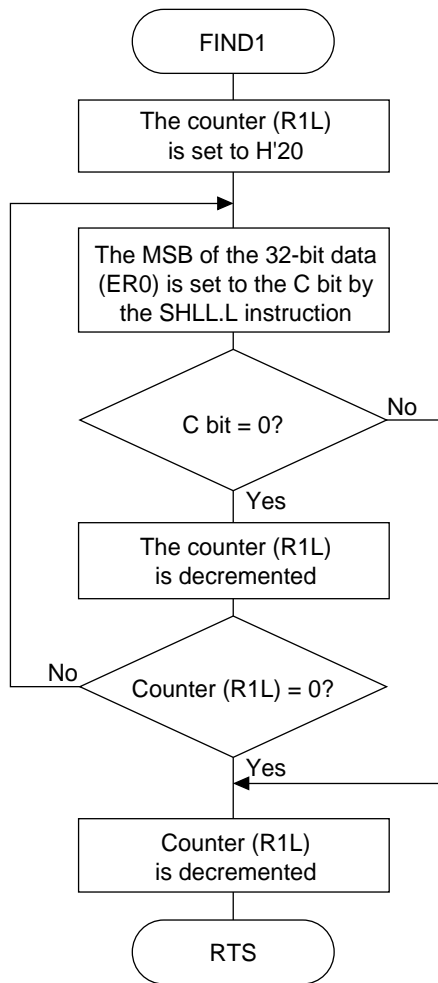


Figure 4.22 FIND1 Flowchart

4.7.6 Program Listing

4.8 64-Bit Binary Addition

MCU: H8/300H Series

Label Name: ADD

Functions Used: ADD.L Instruction

Function: Does binary addition in the format: Summand (signed 64 bits) + addend (signed 64 bits) = sum (signed 64 bits).

Table 4.13 ADD Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Bottom 32 bits of summand (signed 64 bits)	ER1	4
	Top 32 bits of addend (signed 64 bits)	ER2	4
	Bottom 32 bits of addend (signed 64 bits)	ER3	4
Output	Top 32 bits of sum (signed 64 bits)	ER0	4
	Bottom 32 bits of sum (signed 64 bits)	ER1	4
	Existence of carrying (yes = 0, no = 1)	C flag (CCR)	1

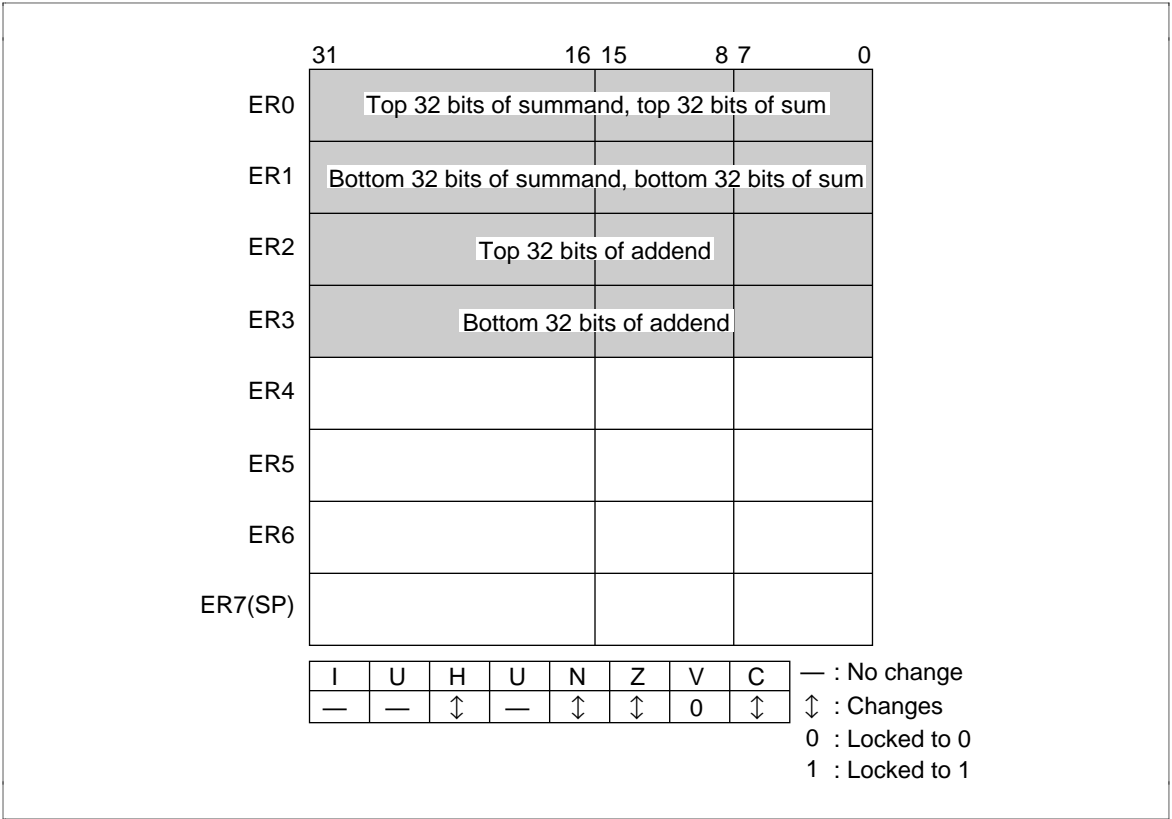


Figure 4.23 Changes in Internal Registers and Flag Changes for ADD

Program memory (bytes)
18
Data memory (bytes)
0
Stack (bytes)
0
Number of states
26
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Figure 4.24 Programming Specifications

4.8.1 Description of Functions

Arguments are as follows:

- ER0: Sets the top 32-bits of the summand (signed 64 bits) as an input argument. Sets the top 32 bits of the sum (signed 64 bits) as an output argument.
- ER1: Sets the bottom 32-bits of the summand (signed 64 bits) as an input argument. Sets the bottom 32 bits of the sum (signed 64 bits) as an output argument.
- ER2: Sets the top 32-bits of the addend (signed 64 bits) as an input argument.
- ER3: Sets the bottom 32-bits of the addend (signed 64 bits) as an input argument.
- C flag (CCR): Indicates whether a carry has occurred after execution of ADD.
 - When C flag = 0: Indicates a carry has occurred.
 - When C flag = 1: Indicates no carry has occurred.

Figure 4.25 is an example of execution of the software ADD. When the input arguments are set as shown, the results of addition are set in ER0 and ER1.

4.8.2 Cautions for Use

Since the results of addition are set in the register used to set the summand, the summand is destroyed when ADD is executed. When you will still require the summand after executing ADD, save the summand elsewhere in memory beforehand.

4.8.3 Description of Data Memory

No data memory is used by ADD.

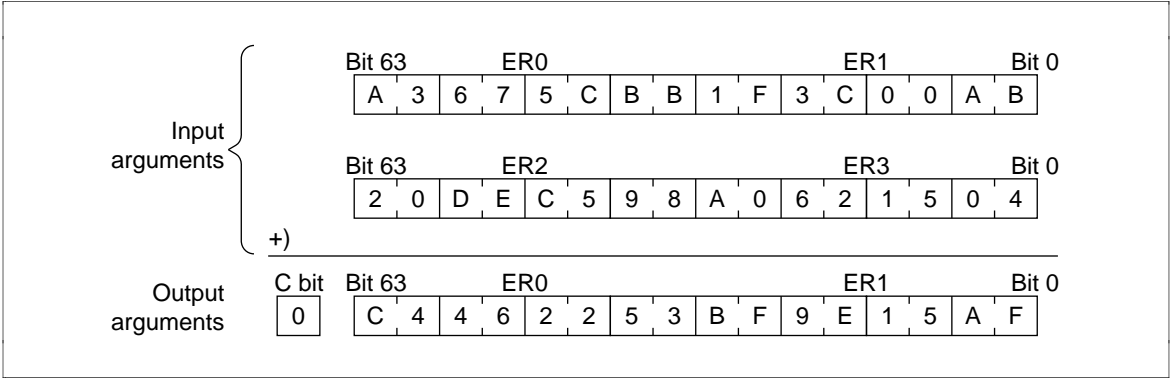


Figure 4.25 Executing ADD

4.8.4 Examples of Use

After setting the summand and addend, does a subroutine call to ADD.

Table 4.14 Block Transfer Example (ADD)

Label	Instruction	Action
WORK 1	.RES. L 1	Reserves the data memory area that sets the top 32-bits of the summand (signed 64 bits) in the user program.
WORK 2	.RES. L 1	Reserves the data memory area that sets the bottom 32-bits of the summand (signed 64 bits) in the user program.
WORK 3	.RES. L 1	Reserves the data memory area that sets the top 32-bits of the addend (signed 64 bits) in the user program.
WORK 4	.RES. L 1	Reserves the data memory area that sets the bottom 32-bits of the addend (signed 64 bits) in the user program.
	MOV. L @WORK1,ER0	Set as the input argument the top 32-bits of the summand set in the user program.
	MOV. L @WORK2,ER1	Set as the input argument the bottom 32-bits of the summand set in the user program.
	MOV. L @WORK3,ER2	Set as the input argument the top 32-bits of the addend set in the user program.
	MOV. L @WORK4,ER3	Set as the input argument the bottom 32-bits of the addend set in the user program.
	...	Subroutine call to ADD.
	JSR @ADD	
	BCS OVER	When carrying occurs, the routine branches to the processing routine for carrying.
	...	
OVER	Processing routine for carrying over	

4.8.5 Principles of Operation

- Bits 0–31 are added using the ADD.L instruction.
- Bits 32–63 are added in 1-byte units from the bottom using the addition instruction with carrying (ADDX.B), which can handle carrying. Since bits 48–55 are on the extended register, the addition instruction with carry is transferred into a usable general register and addition is then performed.

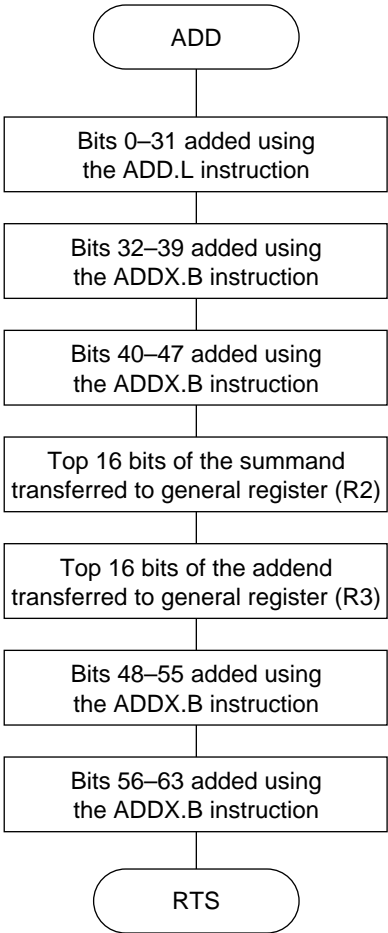


Figure 4.26 ADD Flowchart

4.8.6 Program Listing

4.9 64-Bit Binary Subtraction

MCU: H8/300H Series

Label Name: SUB

Functions Used: SUB.L Instruction

Function: Does binary subtraction in the format: minuend (signed 64 bits) – subtrahend (signed 64 bits) = difference (signed 64 bits).

Table 4.15 SUB Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Top 32 bits of minuend (signed 64 bits)	ER0	4
	Bottom 32 bits of minuend (signed 64 bits)	ER1	4
	Top 32 bits of subtrahend (signed 64 bits)	ER2	4
	Bottom 32 bits of subtrahend (signed 64 bits)	ER3	4
Output	Top 32 bits of difference (signed 64 bits)	ER0	4
	Bottom 32 bits of difference (signed 64 bits)	ER1	4
	Existence of carrying	C flag (CCR)	1

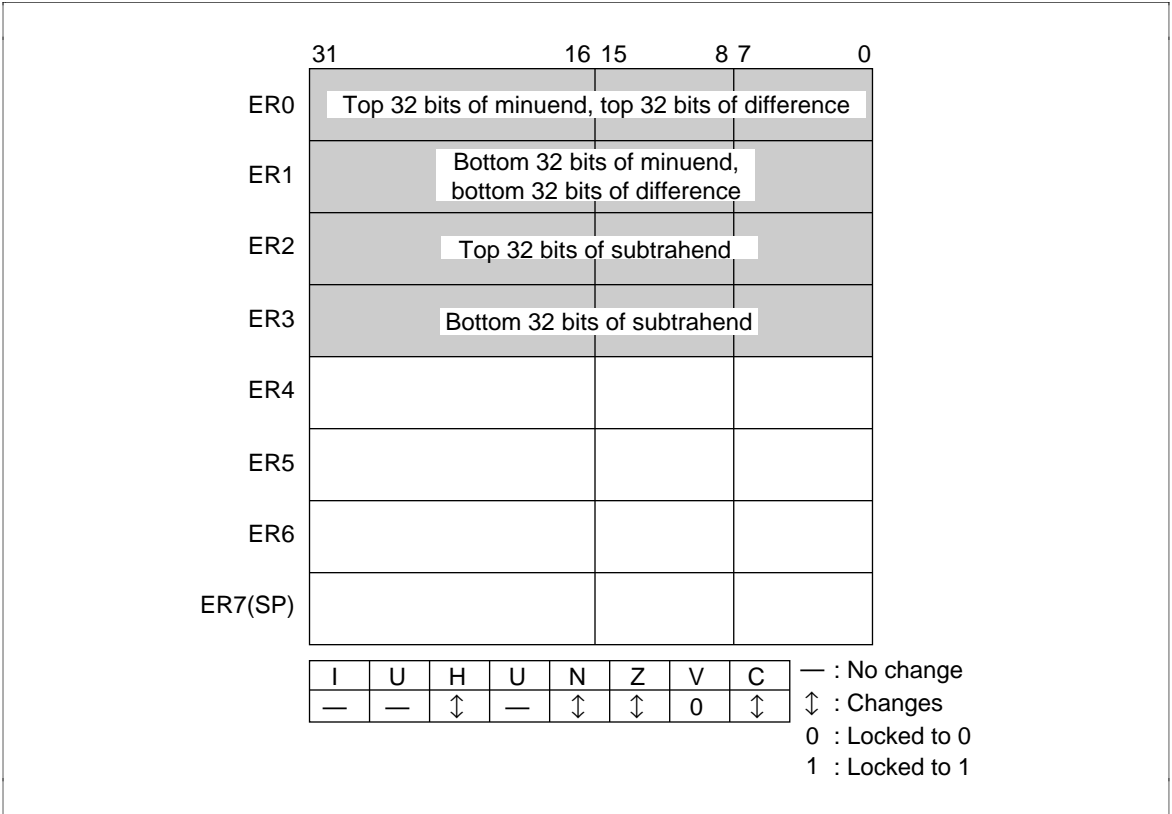


Figure 4.27 Changes in Internal Registers and Flag Changes for SUB

Program memory (bytes)
18
Data memory (bytes)
0
Stack (bytes)
0
Number of states
26
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Figure 4.28 Programming Specifications

4.9.1 Description of Functions

Arguments are as follows:

- ER0: Sets the top 32-bits of minuend (signed 64 bits) as an input argument. Sets the top 32 bits of the difference (signed 64 bits) as an output argument.
- ER1: Sets the bottom 32-bits of the minuend (signed 64 bits) as an input argument. Sets the bottom 32 bits of the difference (signed 64 bits) as an output argument.
- ER2: Sets the top 32-bits of the subtrahend (signed 64 bits) as an input argument.
- ER3: Sets the bottom 32-bits of the subtrahend (signed 64 bits) as an input argument.
- C flag (CCR): Indicates whether a borrow has occurred after execution of SUB.
 - When C flag = 1: Indicates a borrow has occurred.
 - When C flag = 0: Indicates no borrow has occurred.
- Figure 4.29 is an example of execution of the software SUB. When the input arguments are set as shown, the results of subtraction are set in ER0 and ER1.

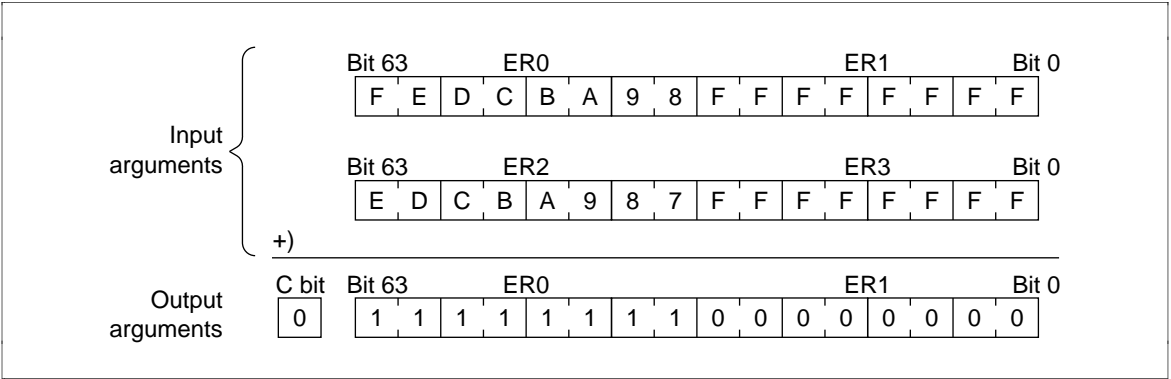


Figure 4.29 Executing SUB

4.9.2 Cautions for Use

Since the results of subtraction are set in the register used to set the minuend, the minuend is destroyed after SUB is executed. When you will still require the minuend after executing SUB, save the minuend elsewhere in memory beforehand.

4.9.3 Description of Data Memory

No data memory is used by SUB.

4.9.4 Examples of Use

After setting the subtrahend and minuend, does a subroutine call to SUB.

Table 4.16 Block Transfer Example (SUB)

Label	Instruction	Action
WORK 1	.RES. L 1	Reserves the data memory area that sets the top 32-bits of the minuend (signed 64 bits) in the user program.
WORK 2	.RES. L 1	Reserves the data memory area that sets the bottom 32-bits of the minuend (signed 64 bits) in the user program.
WORK 3	.RES. L 1	Reserves the data memory area that sets the top 32-bits of the subtrahend (signed 64 bits) in the user program.
WORK 4	.RES. L 1	Reserves the data memory area that sets the bottom 32-bits of the subtrahend (signed 64 bits) in the user program.
	MOV. L @WORK1,ER0	Set as the input argument the top 32-bits of the minuend set in the user program.
	MOV. L @WORK2,ER1	Set as the input argument the bottom 32-bits of the minuend set in the user program.
	MOV. L @WORK3,ER2	Set as the input argument the top 32-bits of the subtrahend set in the user program.
	MOV. L @WORK4,ER3	Set as the input argument the bottom 32-bits of the subtrahend set in the user program.
	...	Subroutine call to SUB.
	JSR @SUB	
	BCS OVER	When borrowing occurs, the routine branches to the processing routine for borrowing.
OVER	...	
	Processing routine for borrowing	

4.9.5 Principles of operation

- Bits 0–31 are subtracted using the SUB.L instruction.
- Bits 32–63 are subtracted in 1-byte units from the bottom using the subtraction instruction with carrying (SUBX.B), which can handle borrowing. Since bits 48–55 are in the extended register, the subtraction instruction with borrow is transferred into the usable general register and subtraction is then performed.

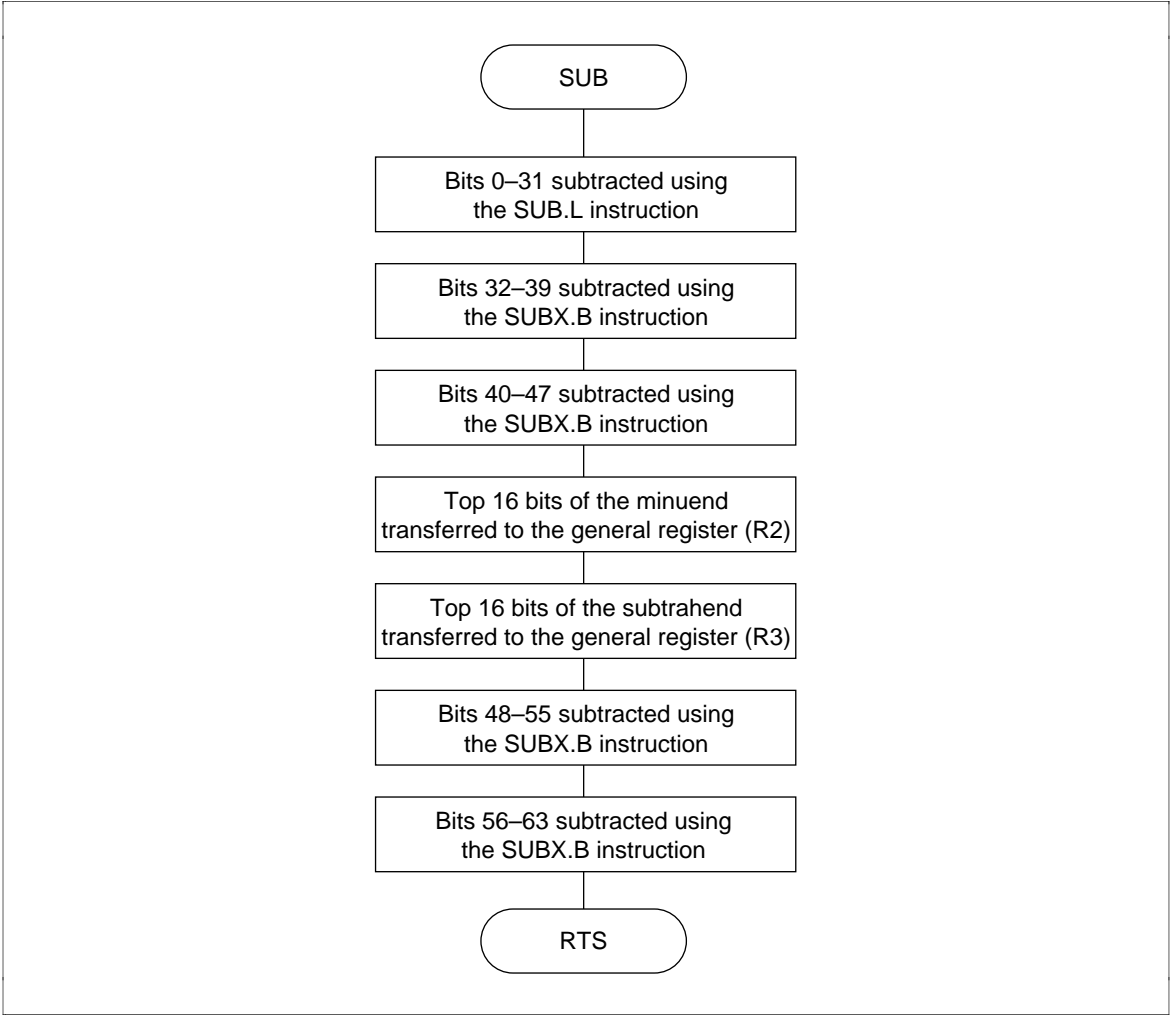


Figure 4.30 SUB Flowchart

4.9.6 Program Listing

4.10 Unsigned 32-Bit Binary Multiplication

MCU: H8/300H Series

Label Name: MUL

Functions Used: MULXU.W Instruction

Function: Does multiplication in the format: Multiplicand (unsigned 32 bits) × multiplier (unsigned 32 bits) = product (unsigned 64 bits).

Table 4.17 MUL Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Multiplicand (unsigned 32 bits)	ER0	4
	Multiplier (unsigned 32 bits)	ER1	4
Output	Top 32 bits of product (unsigned 64 bits)	ER0	4
	Bottom 32 bits of product (unsigned 64 bits)	ER1	4

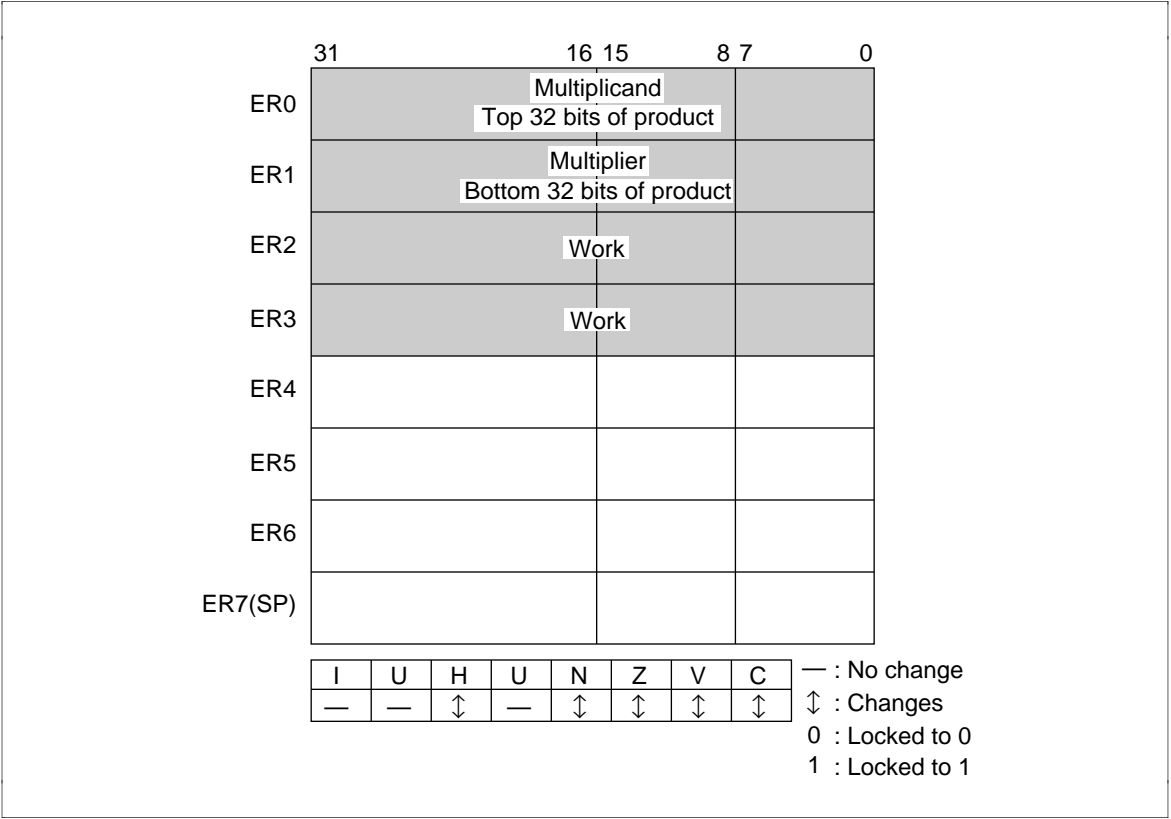


Figure 4.31 Changes in Internal Registers and Flag Changes for MUL

Program memory (bytes)
34
Data memory (bytes)
0
Stack (bytes)
0
Number of states
126
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states in the programming specifications is the value when calculating as H'FFFFFFFF x H'FFFFFFFF.

Figure 4.32 Programming Specifications

4.10.1 Description of functions

Arguments are as follows:

- ER0: Sets the multiplicand (unsigned 32 bits) as an input argument. Sets the top 32 bits of the product (unsigned 64 bits) as an output argument.
- ER1: Sets the multiplier (unsigned 32 bits) as an input argument. Sets the bottom 32 bits of the product (unsigned 64 bits) as an output argument.
- Figure 4.33 is an example of execution of the software MUL. When the input arguments are set as shown, the product is set in ER0 and ER1.

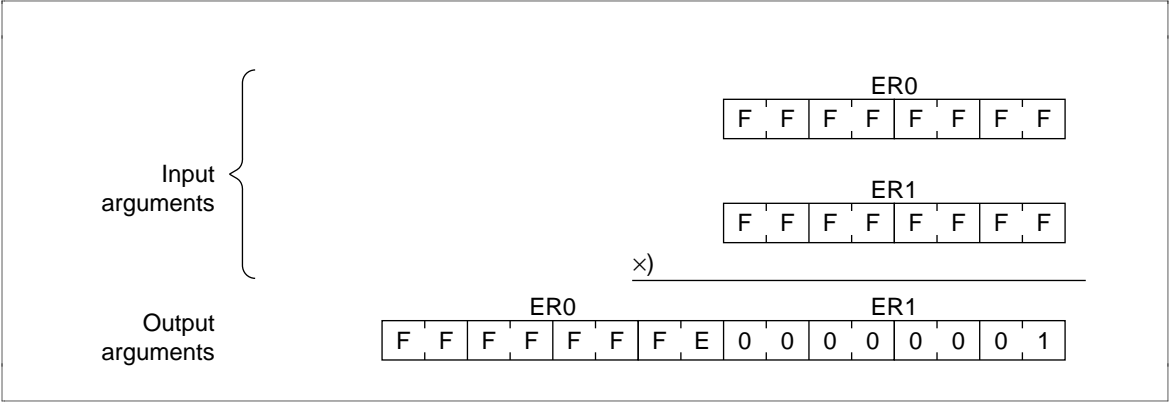


Figure 4.33 Executing MUL

4.10.2 Cautions for Use

Since the product is set in the register used to set the multiplicand and multiplier, the multiplicand and multiplier are destroyed after MUL is executed. When you will still require the multiplicand and multiplier after executing MUL, save them elsewhere in memory beforehand.

4.10.3 Description of Data Memory

No data memory is used by MUL.

4.10.4 Examples of Use

After setting the multiplicand and multiplier, do a subroutine call to MUL.

Table 4.18 Block Transfer Example (MUL)

Label	Instruction	Action
WORK 1	.RES. L 1	Reserves the data memory area that sets the multiplicand (unsigned 32 bits) in the user program.
WORK 2	.RES. L 1	Reserves the data memory area that sets the multiplier (unsigned 32 bits) in the user program.
	MOV. L @WORK1,ER0	Sets as the input argument the 32-bit binary multiplicand set in the user program.
	MOV. L @WORK2,ER1	Sets as the input argument the 32-bit binary multiplier set in the user program.
	JSR @MUL	Subroutine call to MUL.

4.10.5 Principles of Operation

- The partial products of two 16-bit binary numbers are found using the multiplication instruction (MULXU.W) and the results of multiplication are then integrated to perform 32-bit binary multiplication, as shown in figure 4.34.

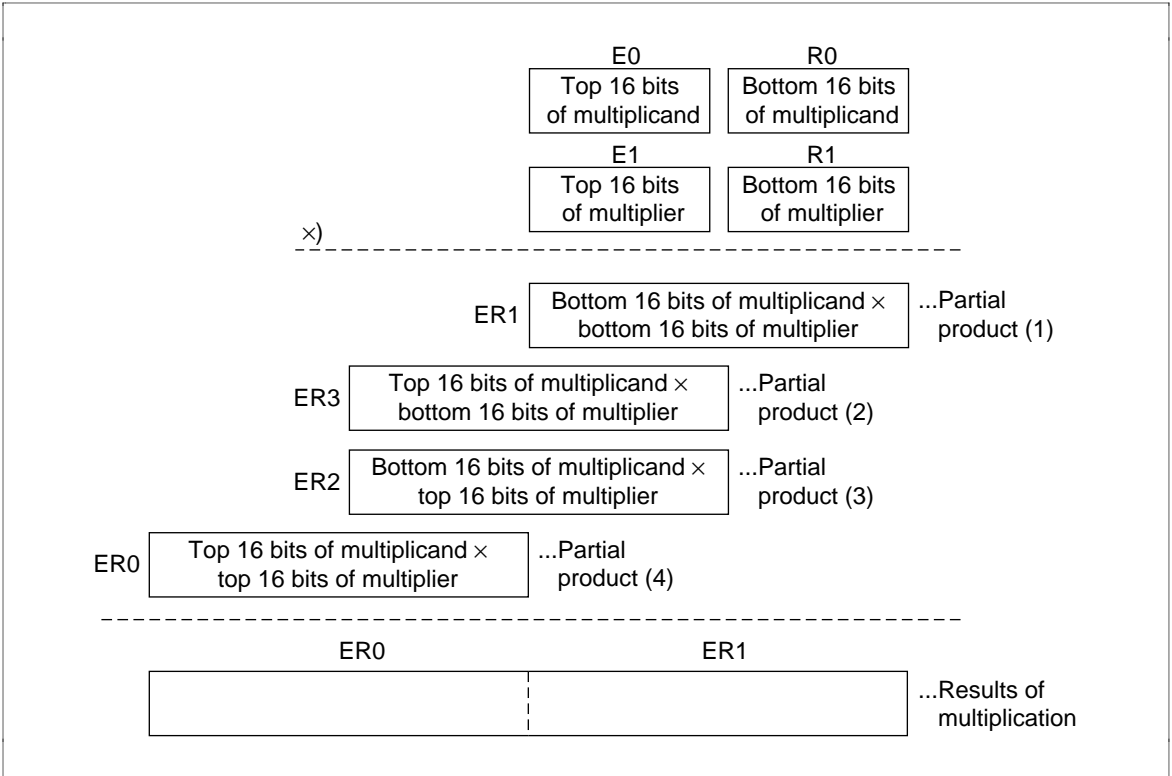


Figure 4.34 Multiplication

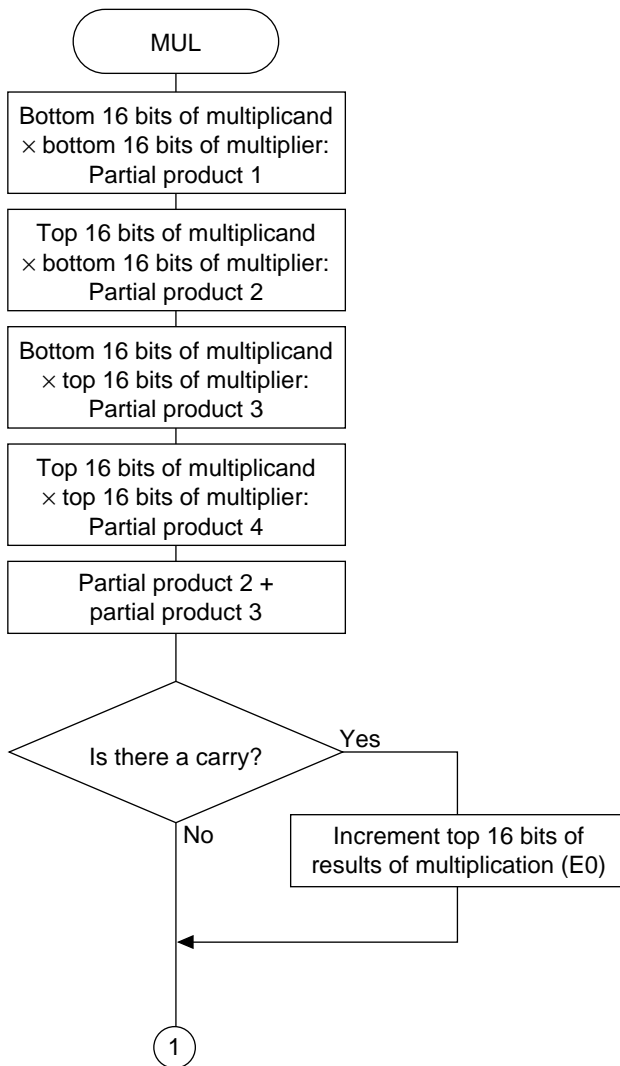


Figure 4.35 MUL Flowchart

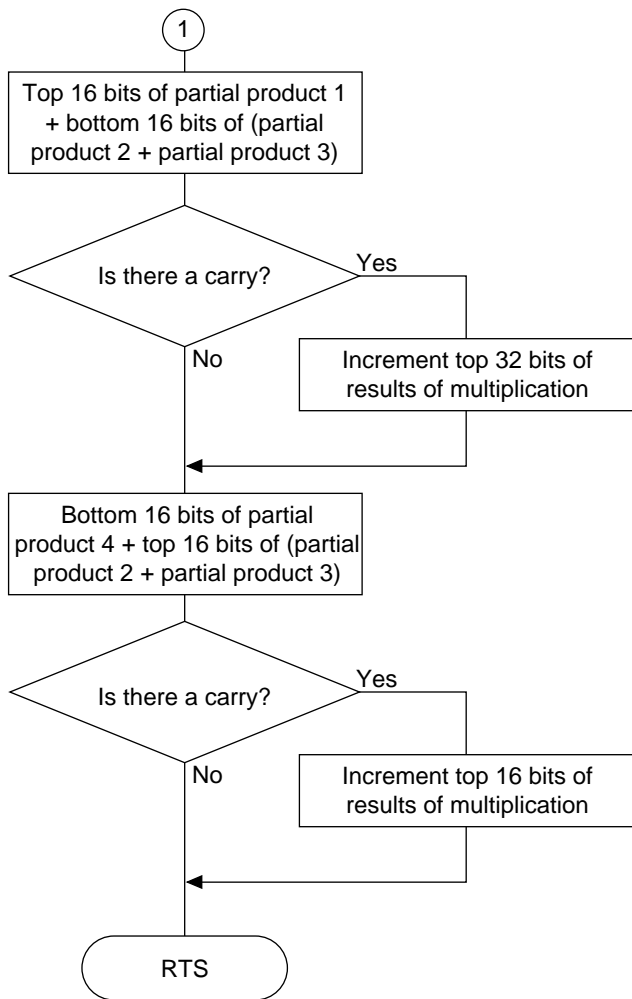


Figure 4.35 MUL Flowchart (cont)

4.10.6 Program Listing

4.11 Unsigned 32-Bit Binary Division

MCU: H8/300H Series

Label Name: DIV

Functions Used: SHLL.L Instruction, ROTXL.L Instruction

Function: Does division in the format: Dividend (unsigned 32 bits) / divisor (unsigned 32 bits) = quotient (unsigned 32 bits) ... remainder (unsigned 32 bits). Dividing by 0 sets the Z flag.

Table 4.19 DIV Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Dividend (unsigned 32 bits)	ER0	4
	Divisor (unsigned 32 bits)	ER1	4
Output	Quotient (unsigned 32 bits)	ER0	4
	Remainder (unsigned 32 bits)	ER2	4
	Presence of error (division by 0) (Yes, Z = 0; No, Z = 1)	Z flag (CCR)	1

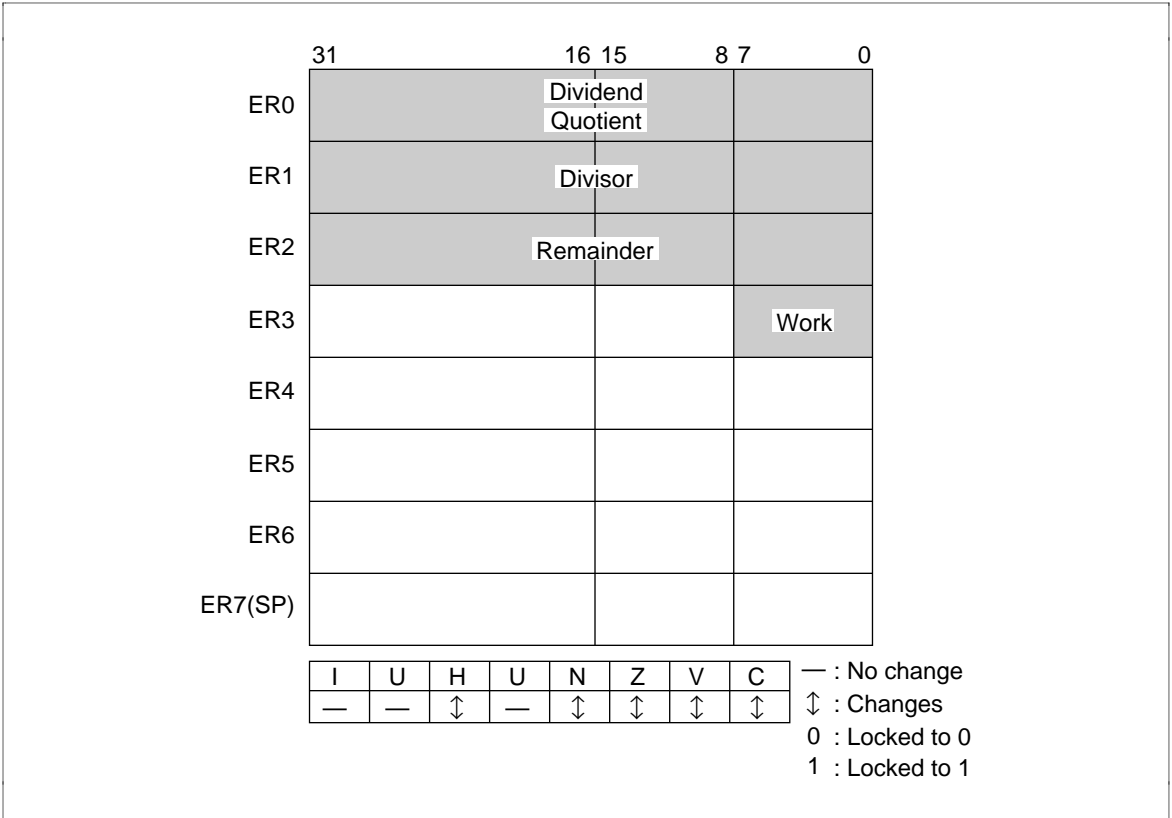


Figure 4.36 Changes in Internal Registers and Flag Changes for DIV

Program memory (bytes)
30
Data memory (bytes)
0
Stack (bytes)
0
Number of states
762
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states in the programming specifications is the value when calculating as $H'FFFFFFF / H'1$.

Figure 4.37 Programming Specifications

4.11.1 Description of Functions

Arguments are as follows:

- ER0: Sets the dividend (unsigned 32 bits) as an input argument. Sets the quotient (unsigned 32 bits) as an output argument.
- ER1: Sets the divisor (unsigned 32 bits) as an input argument.
- ER2: Sets the remainder (unsigned 32 bits) as an output argument.
- Z Flag (CCR): Indicates whether there are any errors (division by 0) after execution of DIV.
 - When Z flag = 1: Indicates that there is an error in the division executed.
 - When Z flag = 0: Indicates that there is no error in the division executed.

Figure 4.38 is an example of execution of the software DIV. When the input arguments are set as shown, the quotient is set in ER0 and the remainder is set in ER1.

With the software DIV, the first thing done is to determine if the divisor is 0 or nonzero; if it is 0, DIV ends.

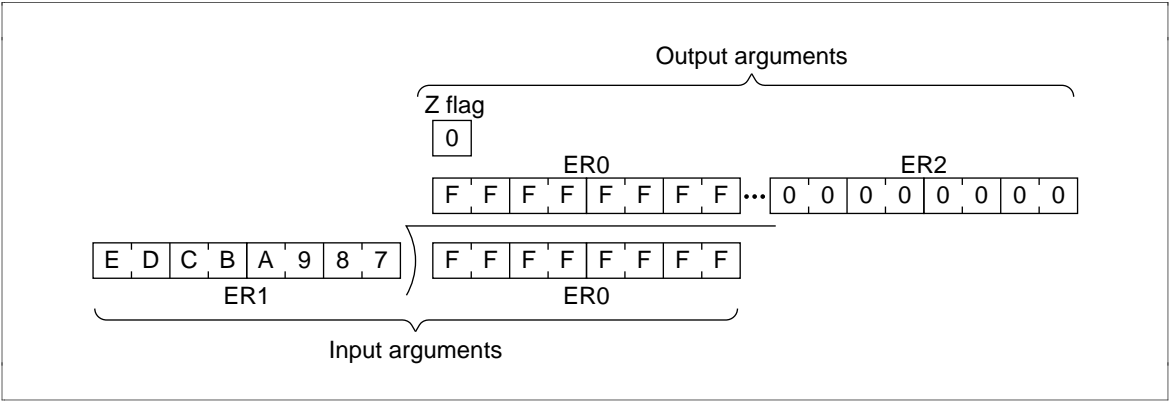


Figure 4.38 Executing DIV

4.11.2 Cautions for Use

Since the quotient is set in ER0, the dividend is destroyed after DIV is executed. When you will still require the dividend after executing DIV, save it elsewhere in memory beforehand.

4.11.3 Description of Data Memory

No data memory is used by DIV.

4.11.4 Examples of Use

After setting the dividend and divisor, do a subroutine call to DIV.

Table 4.20 Block Transfer Example (DIV)

Label	Instruction	Action				
WORK 1	.RES. L 1	Reserves the data memory area that sets the dividend (unsigned 32 bits) in the user program.				
WORK 2	.RES. L 1	Reserves the data memory area that sets the divisor (unsigned 32 bits) in the user program.				
	MOV. L @WORK1,ER0	Sets as the input argument the dividend (unsigned 32 bits) set in the user program.				
	MOV. L @WORK2,ER1	Sets as the input argument the divisor (unsigned 32 bits) set in the user program.				
	<table><tr><td></td><td>JSR</td><td>@DIV</td><td></td></tr></table>		JSR	@DIV		Subroutine call to DIV.
	JSR	@DIV				

4.11.5 Principles of Operation

- Binary division finds the quotient and remainder by repeatedly subtracting. In figure 4.39, H'0D is divided by H'03 as an example of the division operation.

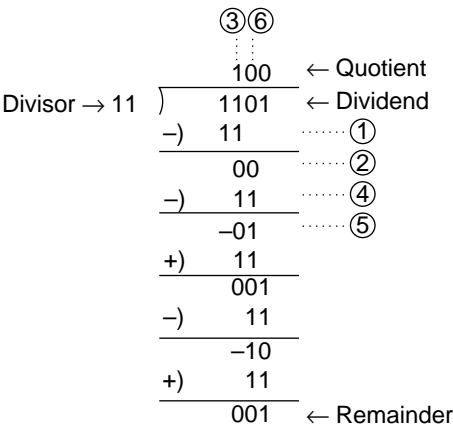


Figure 4.39 Division

- Detailed description of the program:
 - i. Sets the number of shifts in the counter R3L (which indicates the number of shifts).
 - ii. The dividend is shifted 1 bit to the left and the MSB loaded in the C bit is set in the LSB of ER2 (which stores the remainder).
 - iii. The divisor is subtracted from ER2. When the result of subtraction is positive, the LSB of ER0 is set (1 to 2 to 3 in figure 4.39). When the results of subtraction is negative, the LSB of ER0 is cleared and the divisor is added to the results of subtraction, returning it to the state prior to subtraction. ((4 to (5) to (6) in figure 4.39).
 - iv. The shift counter set in step (i) is decremented.
 - v. Steps (ii) through (iv) are repeated until the shift counter reaches -1.

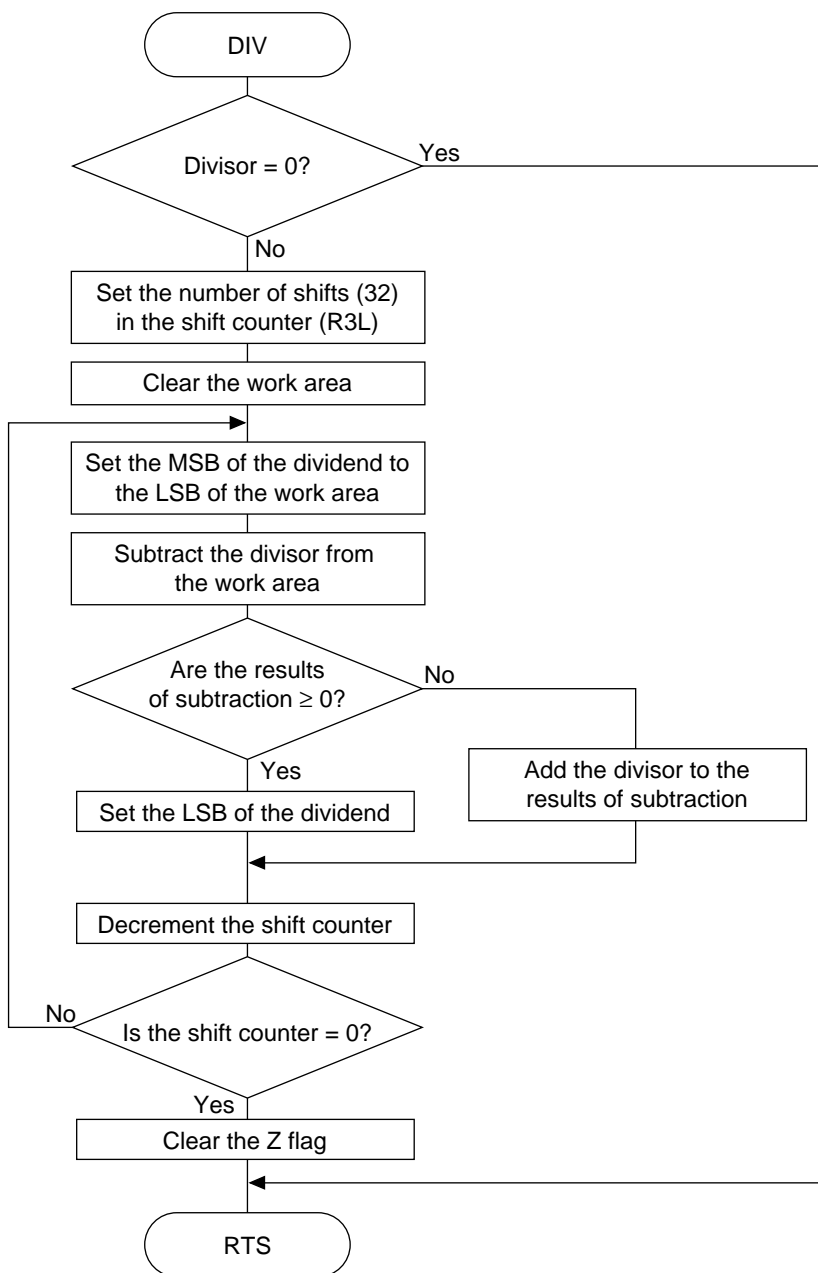


Figure 4.40 DIV Flowchart

4.11.6 Program Listing

4.12 Signed 16-Bit Binary Multiplication

MCU: H8/300H Series

Label Name: MULXS

Functions Used: MULXS.W Instruction

Function: Does multiplication in the format: Multiplicand (signed 16 bits) × multiplier (signed 16 bits) = product (signed 32 bits).

Table 4.21 MULXS Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Multiplicand (signed 16 bits)	R0	2
	Multiplier (signed 16 bits)	E0	2
Output	Product (signed 32 bits)	ER0	4

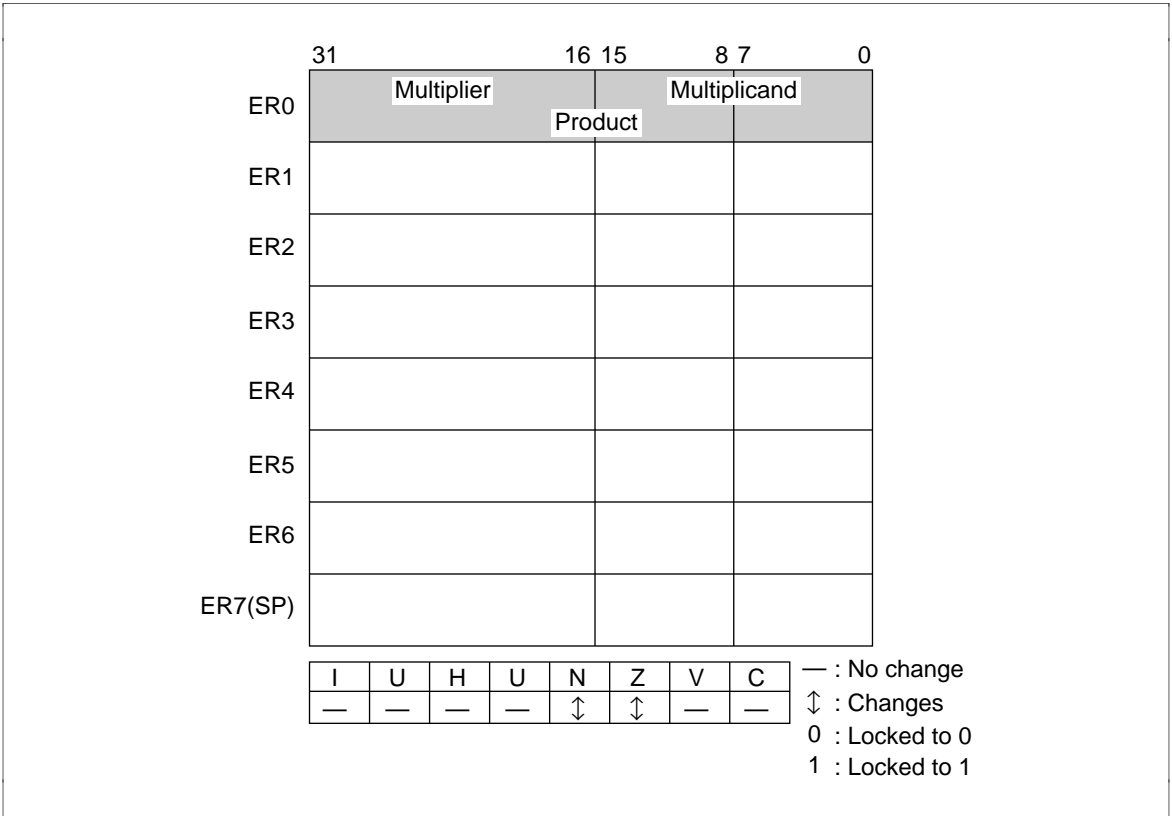


Figure 4.41 Changes in Internal Registers and Flag Changes for MULXS

Program memory (bytes)
4
Data memory (bytes)
0
Stack (bytes)
0
Number of states
24
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Figure 4.42 Programming Specifications

4.12.1 Description of Functions

Arguments are as follows:

- E0: Sets the multiplicand (signed 16 bits) as an input argument.
- R0: Sets the multiplier (signed 16 bits) as an input argument.
- ER0: Sets the product (signed 32 bits) as an output argument.

Figure 4.43 is an example of execution of the software MULXS.B
When the input arguments are set as shown, the results of multiplication are set in ER0.

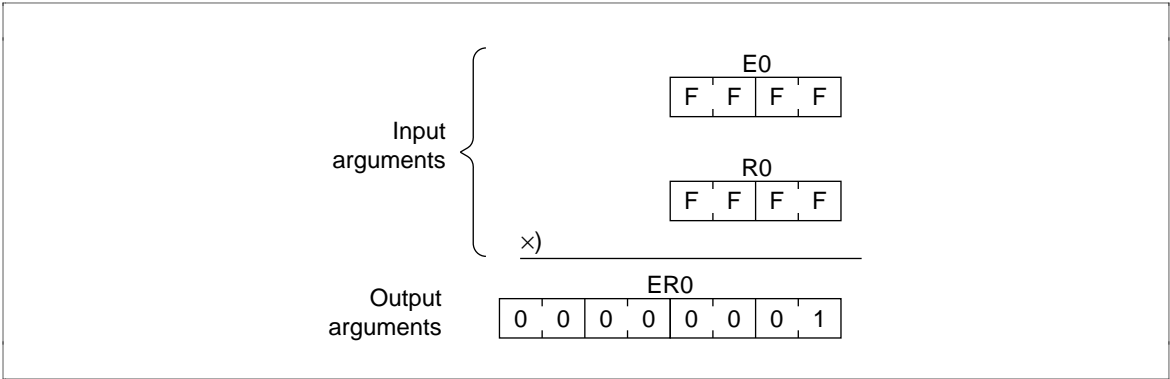


Figure 4.43 Executing MULXS

4.12.2 Cautions for Use

Since the results of multiplication are set in the register used to set the multiplicand and multiplier, the multiplicand and multiplier are destroyed after MULXS is executed. When you will still require the multiplicand and multiplier after executing MULXS, save them elsewhere in memory beforehand.

4.12.3 Description of Data Memory

No data memory is used by MULXS.

4.12.4 Examples of Use

After setting the multiplicand and multiplier, do a subroutine call to MULXS.

Table 4.22 Block Transfer Example (MULXS)

Label	Instruction	Action			
WORK 1	RES. W 1	Reserves the data memory area that sets the multiplicand (signed 16 bits) in the user program.			
WORK 2	RES. W 1	Reserves the data memory area that sets the multiplier (signed 16 bits) in the user program.			
	MOV. L @WORK1,R0	Sets as the input argument the 16-bit binary multiplicand set in the user program.			
	MOV. L @WORK2,E0	Sets as the input argument the 16-bit binary multiplier set in the user program.			
	<table><tr><td></td><td>JSR</td><td>@MULXS</td><td></td></tr></table>		JSR	@MULXS	
	JSR	@MULXS			

4.12.5 Principles of Operation

Use the signed 16-bit multiplication instruction MULXS.W.

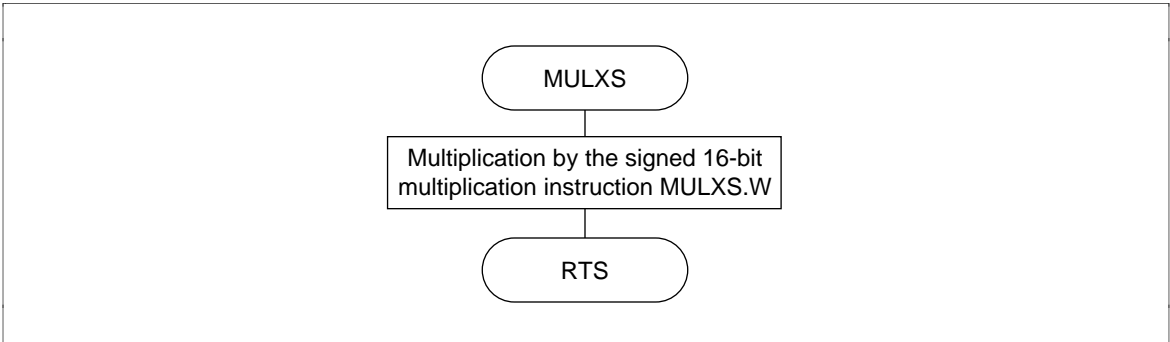


Figure 4.44 MULXS Flowchart

4.12.6 Program Listing

4.13 Signed 32-Bit Binary Multiplication

MCU: H8/300H Series

Label Name: MULS

Functions Used: MULXU.W Instruction

Function: Does binary multiplication in the format: Multiplicand (signed 32 bits) x multiplier (signed 32 bits) = product (signed 64 bits).

Table 4.23 MULS Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Multiplicand (signed 32 bits)	ER0	4
	Multiplier (signed 32 bits)	ER1	4
Output	Top 32 bits of product (signed 64 bits)	ER3	4
	Bottom 32 bits of product (signed 64 bits)	ER0	4

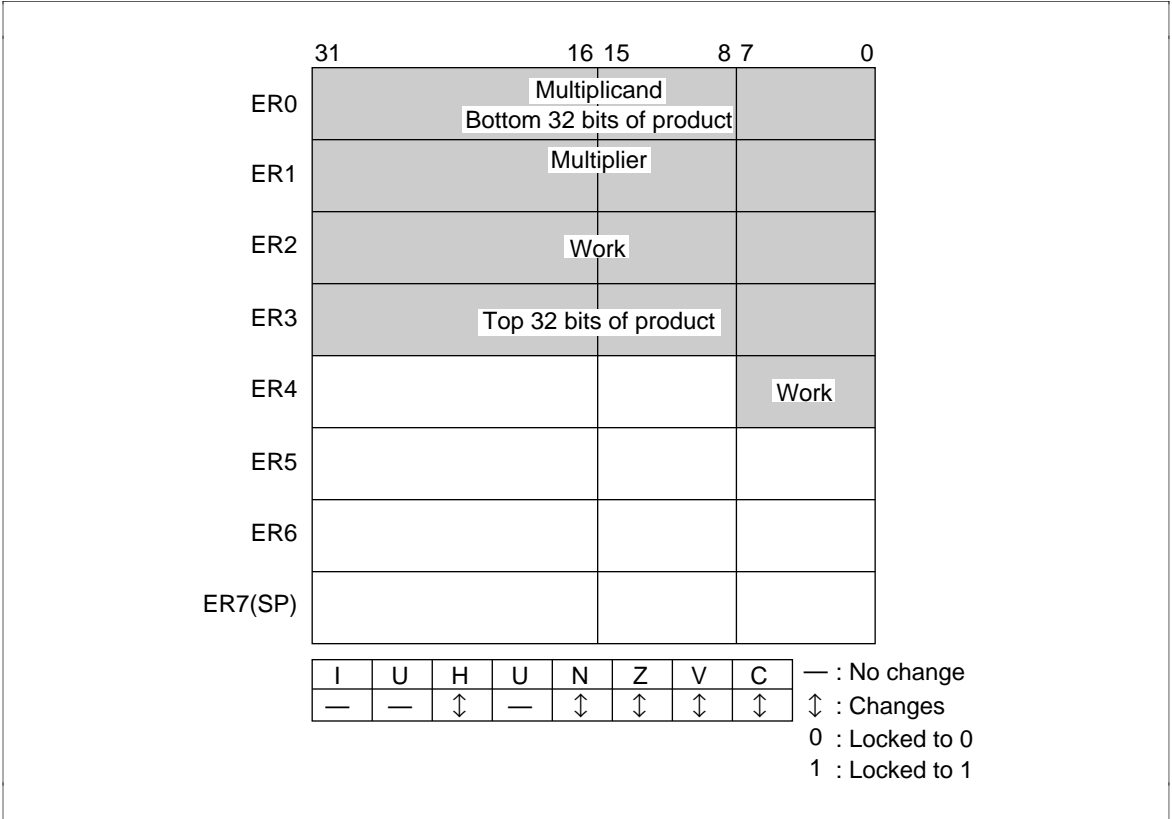


Figure 4.45 Changes in Internal Registers and Flag Changes for MULS

Program memory (bytes)
66
Data memory (bytes)
0
Stack (bytes)
0
Number of states
156
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states in the programming specifications is the value when calculated as H'80000000 x H'7FFFFFFF.

Figure 4.46 Programming Specifications

4.13.1 Description of Functions

Arguments are as follows:

- ER0: Sets the multiplicand (signed 32 bits) as an input argument. Sets the bottom 32 bits of the product (signed 64 bits) as an output argument.
- ER1: Sets the multiplier (signed 32 bits) as an input argument. Sets the bottom 32 bits of the product (signed 64 bits) as an output argument.
- Sets the top 32 bits of the product (signed 64 bits) as an output argument.

Figure 4.47 is an example of execution of the software MULS. When the input arguments are set as shown, the product is set in ER3 and ER0.

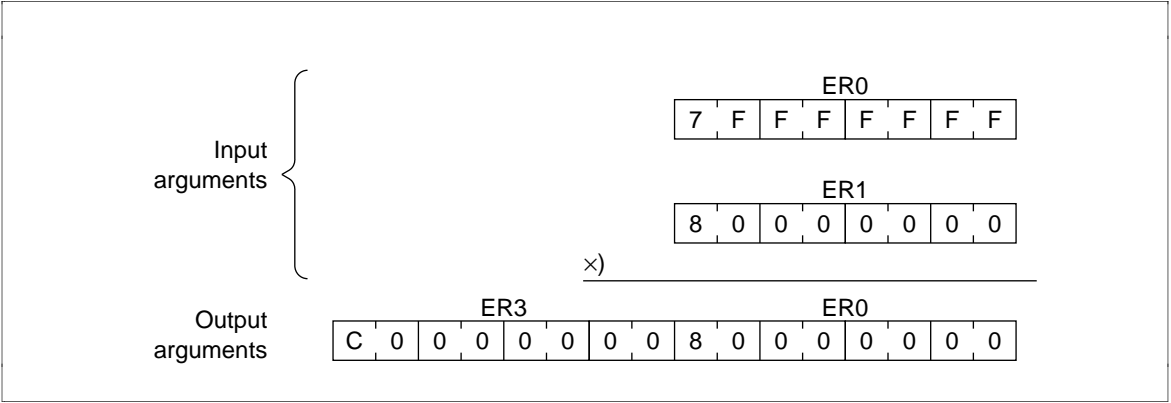


Figure 4.47 Executing MULS

4.13.2 Cautions for Use

Since the results of multiplication are set in the register used to set the multiplicand and multiplier, the multiplicand and multiplier are destroyed after MULS is executed. When you will still require the multiplicand and multiplier after executing MULS, save them elsewhere in memory beforehand.

4.13.3 Description of Data Memory

No data memory is used by MULS.

4.13.4 Examples of Use

After setting the multiplicand and multiplier, do a subroutine call to MULS.

Table 4.24 Block Transfer Example (MULS)

Label	Instruction	Action			
WORK 1	.RES. L 1	Reserves the data memory area that sets the multiplicand (signed 32 bits) in the user program.			
WORK 2	.RES. L 1	Reserves the data memory area that sets the multiplier (signed 32 bits) in the user program.			
	MOV. L @WORK1,ER0	Sets as the input argument the multiplicand (signed 32 bits) set in the user program.			
	MOV. L @WORK2,ER1	Sets as the input argument the multiplier (signed 32 bits) set in the user program.			
	<table><tr><td></td><td>JSR</td><td>@MULS</td><td></td></tr></table>		JSR	@MULS	
	JSR	@MULS			

4.13.5 Principles of Operation

- Negative multiplicands and multipliers are converted to positive.
- The product is found by taking the partial products ((1), (2), (3) and (4) in figure 4.48) and then accumulating the results of multiplication (figure 4.48 (5)). The partial products are found by using the signed multiplication instruction (MULXU.W) on two 16-bit binary numbers.
- The product is then converted to negative if the sign flag is 1, as shown in table 4.25.

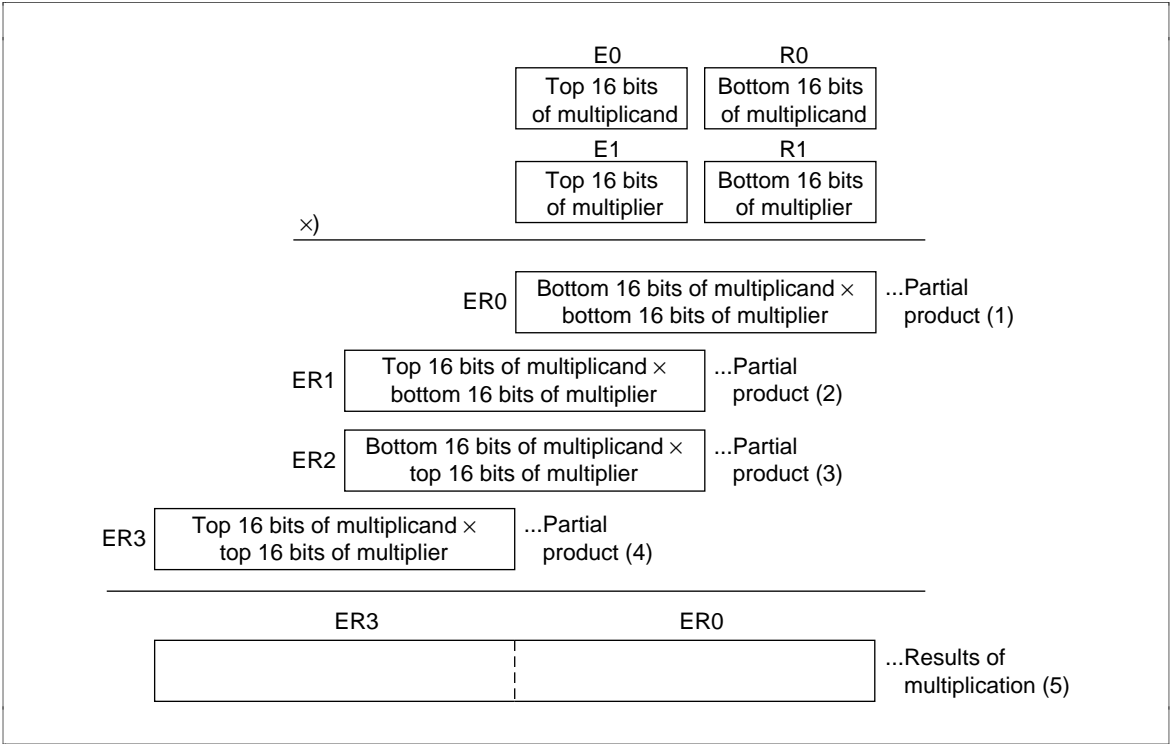


Figure 4.48 Multiplication

Table 4.25 Sign of Results of Multiplication and Sign Flag

Multiplicand	Multiplier	Product	Sign Flag
Positive	Positive	Positive	0
	Negative	Negative	1
Negative	Positive	Negative	1
	Negative	Positive	0

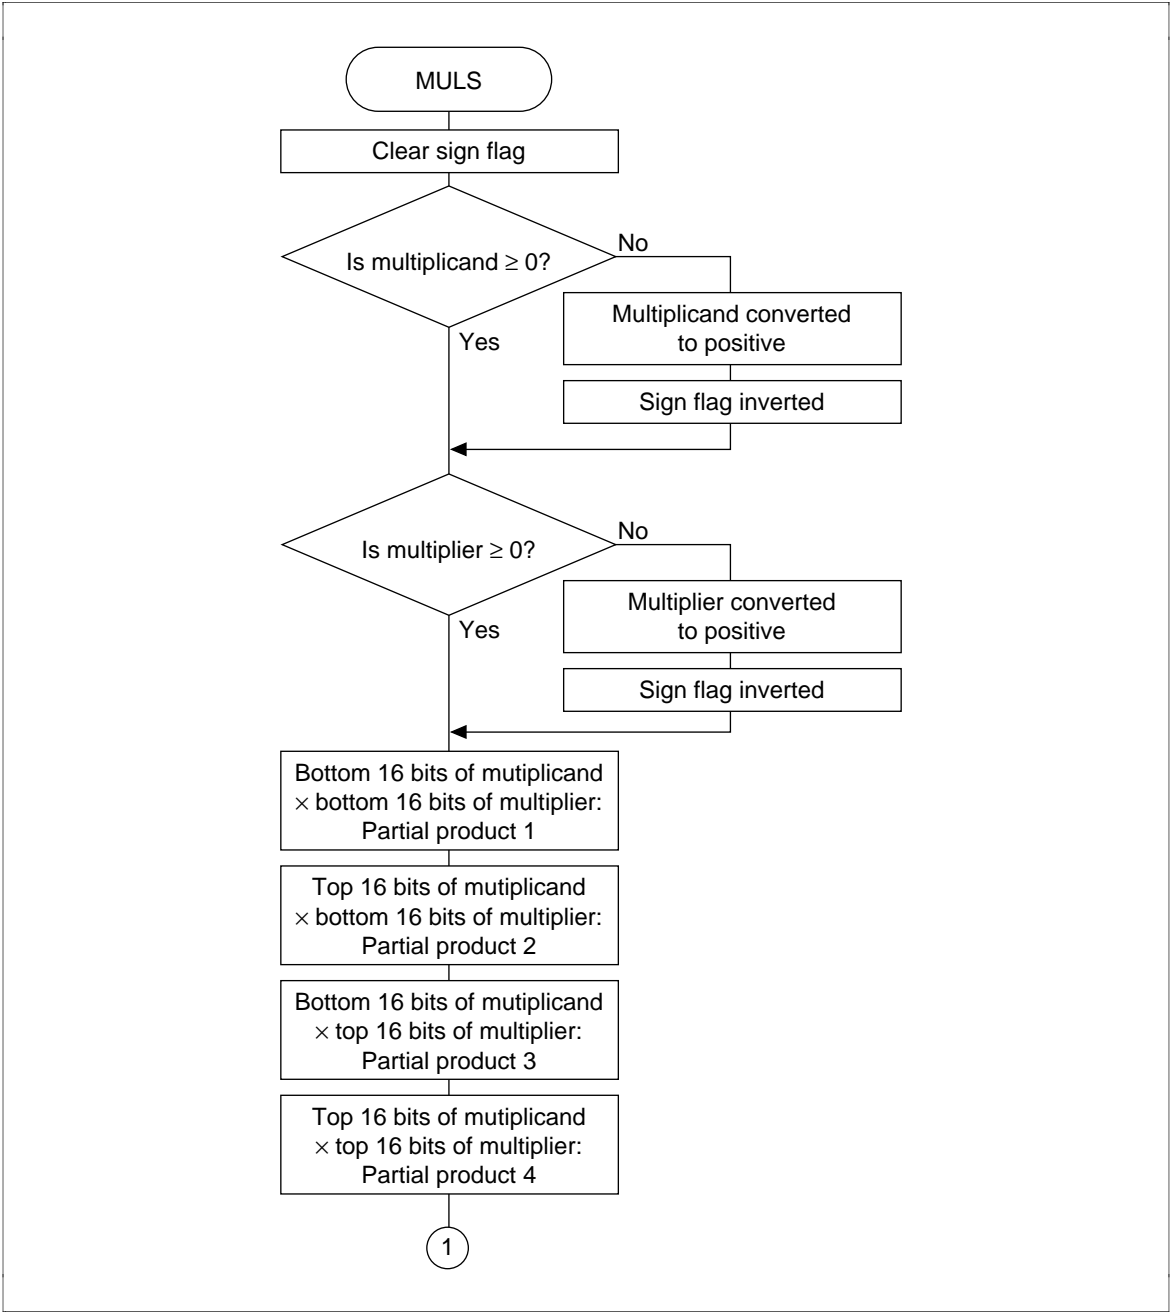


Figure 4.49 MULS Flowchart

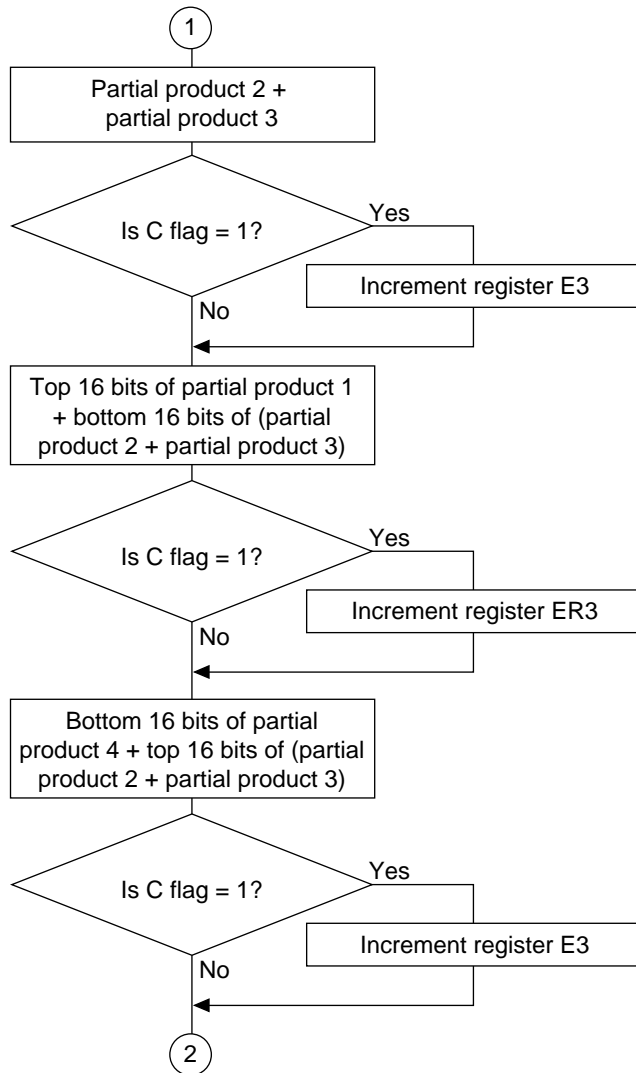


Figure 4.49 MULS Flowchart (cont)

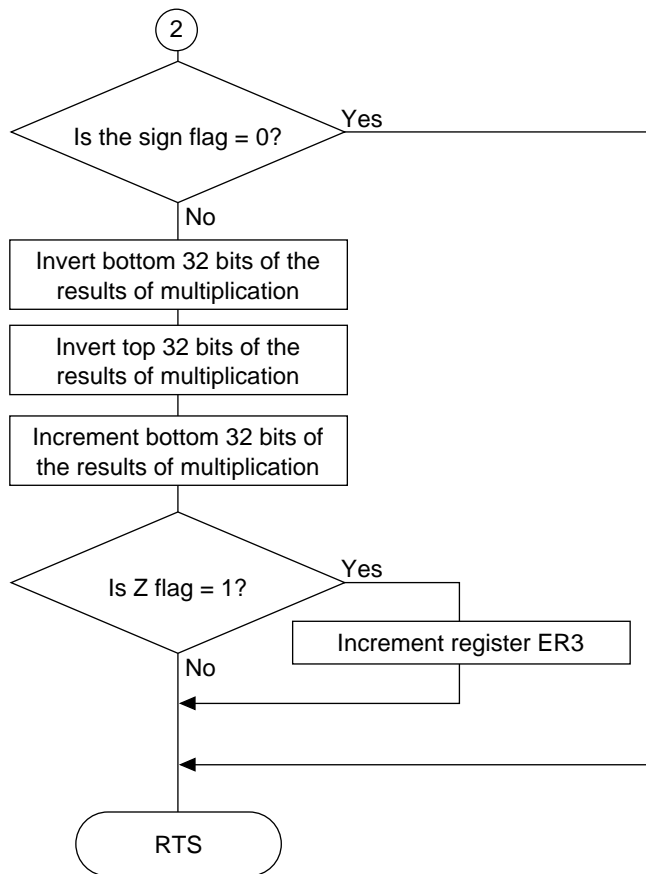


Figure 4.49 MULS Flowchart (cont)

4.13.6 Program Listing

4.14 Signed 32-Bit Binary Division (16-Bit Divisor)

MCU: H8/300H Series

Label Name: DIVXS

Functions Used: DIVXS.W Instruction

Function: Does division in the format: Dividend (signed 32 bits) / divisor (signed 16 bits) = quotient (signed 32 bits) ... remainder (signed 16 bits).

Table 4.26 DIVXS Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Dividend (signed 32 bits)	ER1	4
	Divisor (signed 16 bits)	R0	2
Output	Quotient (signed 32 bits)	ER2	4
	Remainder (signed 16 bits)	E1	2
	Presence of error	Z flag (CCR)	1

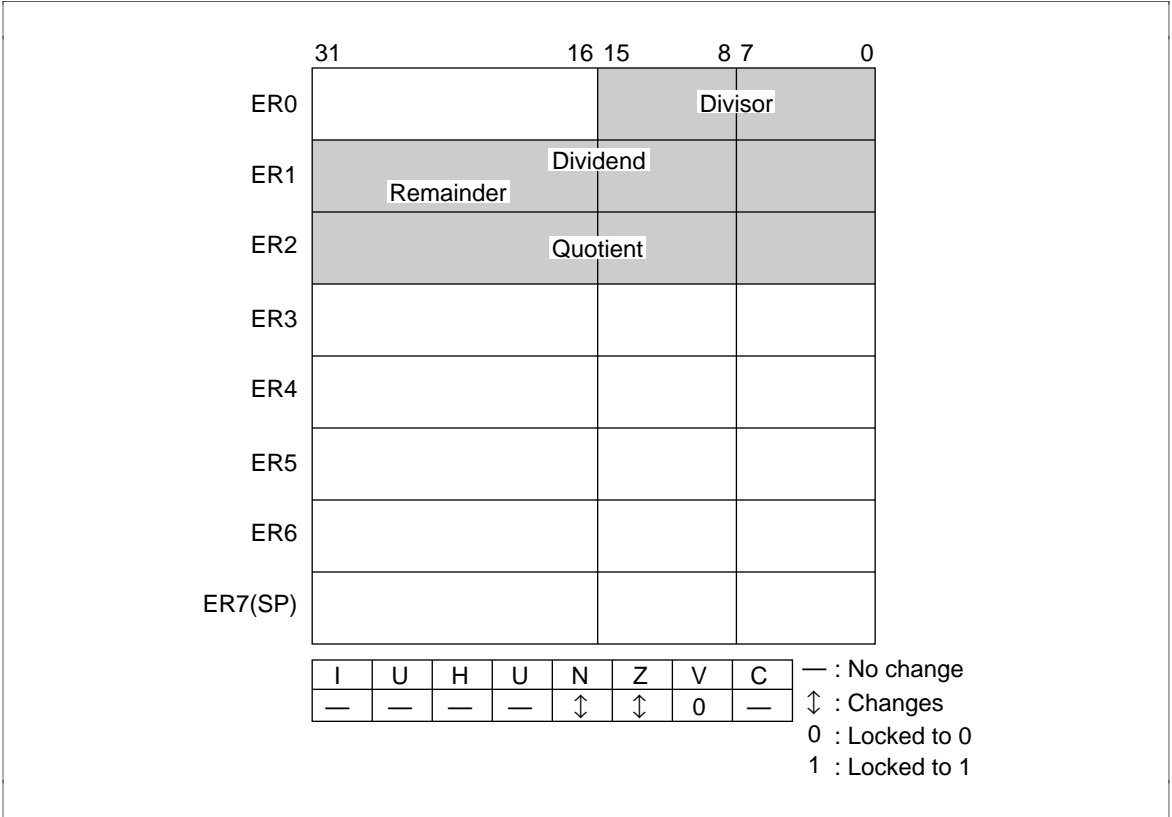


Figure 4.50 Changes in Internal Registers and Flag Changes for DIVXS

Program memory (bytes)
26
Data memory (bytes)
0
Stack (bytes)
0
Number of states
76
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states in the programming specifications is the value when calculated as H'80000000 / H7FFF'.

Figure 4.51 Programming Specifications

4.14.1 Description of Functions

Arguments are as follows

- R0: Sets the divisor (signed 16 bits) as an input argument.
- ER1: Sets the dividend (signed 32 bits) as an input argument.
- ER2: Sets the quotient (signed 32 bits) as an output argument.
- E1: Sets the remainder (signed 16 bits) as an output argument.
- Z Flag (CCR): Indicates whether there are any errors (division by 0) after execution of DIVXS.
 - When Z flag = 1: Indicates that there is an error in the division.
 - When Z flag = 0: Indicates that there is no error in the division.

Figure 4.52 is an example of execution of the software DIVXS. When the input arguments are set as shown, the quotient is set in ER2 and the remainder is set in E1.

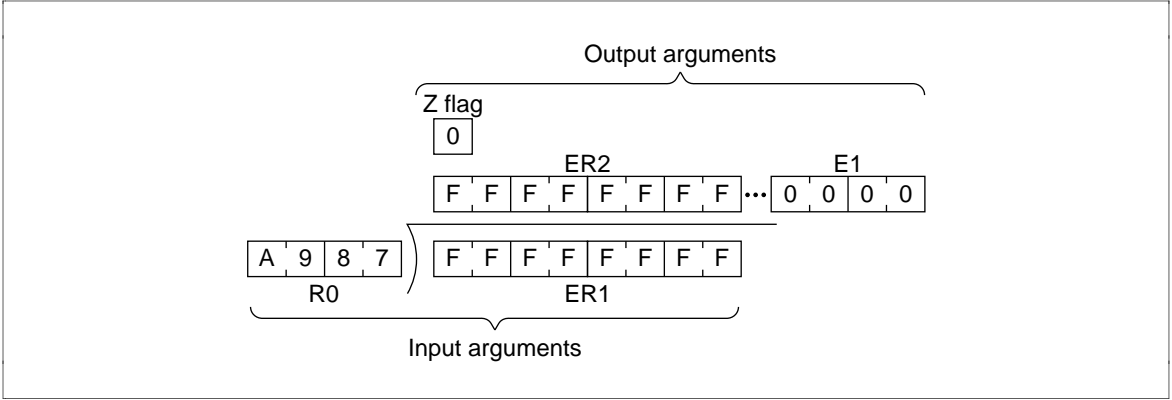


Figure 4.52 Executing DIVXS

- With the software DIVXS, the first thing done is to determine if the divisor is 0 or nonzero; if it is 0, DIVXS ends.

4.14.2 Cautions for Use

Since the remainder is set in E1 and the bottom 16 bits of the quotient are set in R1, the dividend is destroyed after DIVXS is executed. When you will still require the dividend after executing DIVXS, save it elsewhere in memory beforehand.

4.14.3 Description of Data Memory

No data memory is used by DIVXS.

4.14.4 Examples of Use

After setting the dividend and divisor as input arguments, do a subroutine call to DIVXS.

Table 4.27 Block Transfer Example (DIVXS)

Label	Instruction	Action
WORK 1	.RES. L 1	Reserves the data memory area that sets the dividend (signed 32 bits) in the user program.
WORK 2	.RES. W 1	Reserves the data memory area that sets the divisor (signed 16 bits) in the user program.
	MOV. L @WORK1,ER1	Sets as the input argument the dividend set in the user program.
	MOV. L @WORK2,R0	Sets as the input argument the divisor set in the user program.
	<div>JSR @DIVXS</div>	Subroutine call to DIVXS.
	BEQ ERROR	When division by 0 is attempted, the program branches to the processing routine for errors.
	⋮	
ERROR	<div>Processing routine for errors</div>	

4.14.5 Principles of Operation

- First, the program searches for zero-division errors. If there is such an error, the divisor is transferred to the register in which it is itself stored so that the resulting Z bit can be used to determine if the divisor is 0. If the Z bit is 1 (divisor = 0), DIVXS ends.
- When 32 bits is being divided by 16 bits using the signed division instruction (DIVXS.W), a quotient of 16 bits is found. The quotient will thus overflow when division such as H'FFFFF/H'1 is performed. For that reason, a quotient of 32 bits is found using the following procedure.
 - The top 16 bits of the dividend are sent to R2 and sign-extended into 32 bits (figure 4.53 (1)).
 - The top 16 bits of the dividend are divided to obtain the top 16 bits of the quotient (ii) (figure 4.53 (2)).
 - The remainder of (ii) (remainder 1) is sent to R1 (figure 4.53 (3)).
 - Division is performed on the bottom 16 bits of the dividend to find the bottom 16 bits of the quotient and the remainder (remainder 2) (figure 4.53 (4)).

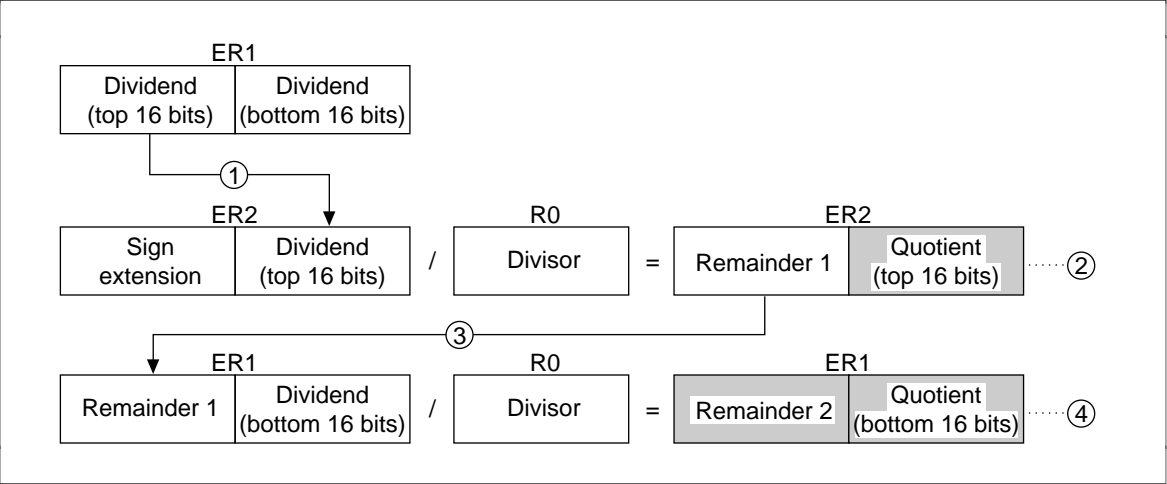


Figure 4.53 Overflow Processing

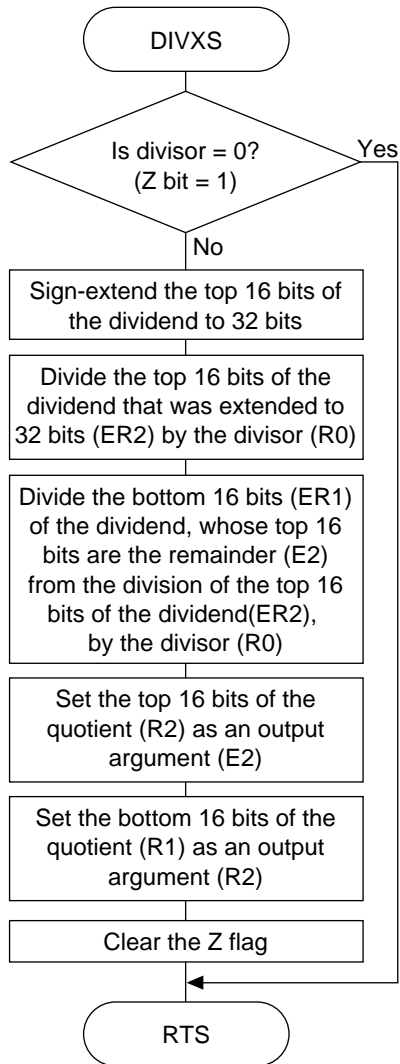


Figure 4.54 DIVXS Flowchart

4.14.6 Program Listing

4.15 Signed 32-Bit Binary Division (32-Bit Divisor)

MCU: H8/300H Series

Label Name: DIVS

Functions Used: SHLL.L Instruction, ROTL.L Instruction, NEG.L Instruction

Function: Does division in the format: Dividend (signed 32 bits) / divisor (signed 32 bits) = quotient (signed 32 bits) ... remainder (signed 32 bits).

Table 4.28 DIVS Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Dividend (signed 32 bits)	ER0	4
	Divisor (signed 32 bits)	ER1	4
Output	Quotient (signed 32 bits)	ER0	4
	Remainder (signed 32 bits)	ER2	4
	Presence of error	Z flag (CCR)	1

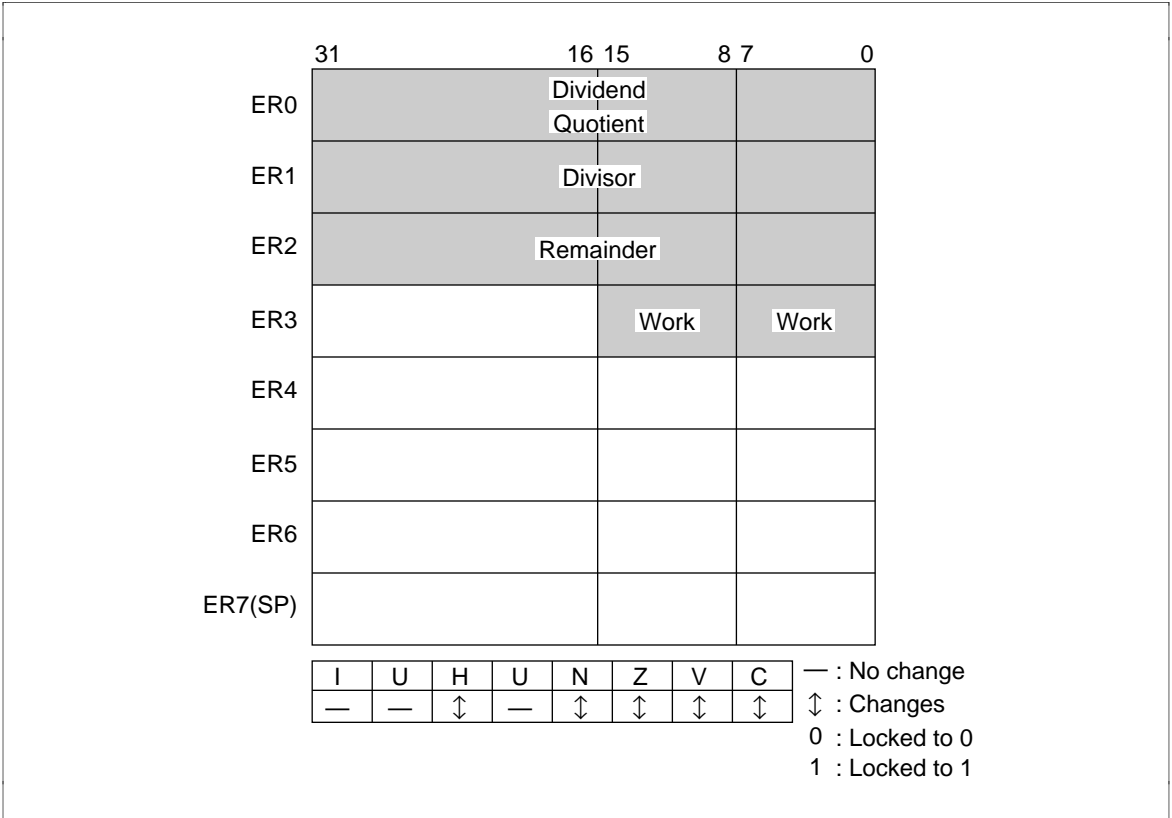


Figure 4.55 Changes in Internal Registers and Flag Changes for DIVS

Program memory (bytes)
66
Data memory (bytes)
0
Stack (bytes)
0
Number of states
770
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states in the programming specifications is the value when calculated as H'80000000 / H7FFFFFFF.

Figure 4.56 Programming Specifications

4.15.1 Description of Functions

Arguments are as follows:

- ER0: Sets the dividend (unsigned 32 bits) as an input argument. Sets the quotient (unsigned 32 bits) as an output argument.
- ER1: Sets the divisor (unsigned 32 bits) as an input argument.
- ER2: Sets the remainder (unsigned 32 bits) as an output argument.
- Z Flag (CCR): Indicates whether there are any errors (division by 0) after execution of DIVS.
 - When Z flag = 1: Indicates that there is an error in the division.
 - When Z flag = 0: Indicates that there is no error in the division.
- Figure 4.57 is an example of execution of the software DIVS. When the input arguments are set as shown, the quotient is set in ER0 and the remainder is set in ER2.
- When the divisor is 0, DIVS ends immediately.

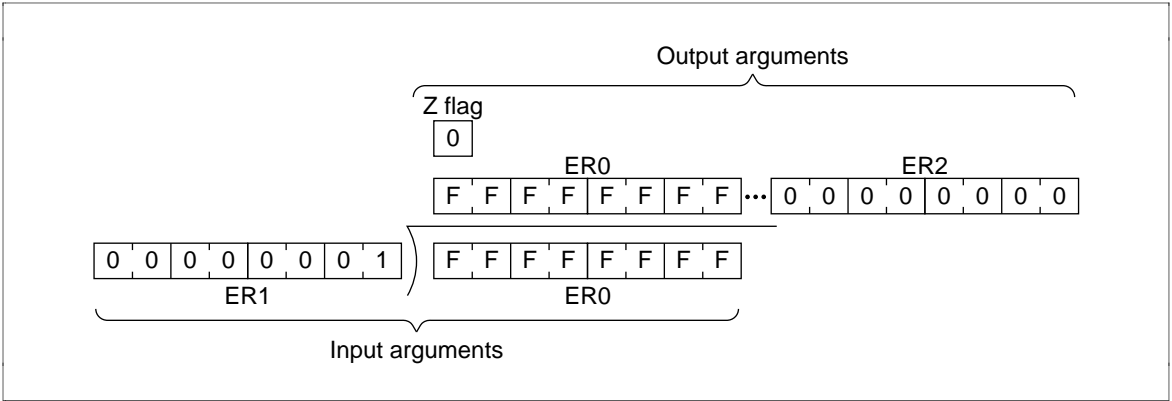


Figure 4.57 Executing DIVS

4.15.2 Cautions for Use

Since the quotient is set in ER0, the dividend is destroyed after DIVS is executed. When you will still require the dividend after executing DIVS, save it elsewhere in memory beforehand.

4.15.3 Description of Data Memory

No data memory is used by DIVS.

4.15.4 Examples of Use

After setting the dividend and divisor, do a subroutine call to DIVS.

Table 4.29 Block Transfer Example (DIVS)

Label	Instruction	Action				
WORK 1	.RES. L 1	Reserves the data memory area that sets the dividend (signed 32 bits) in the user program.				
WORK 2	.RES. L 1	Reserves the data memory area that sets the divisor (signed 32 bits) in the user program.				
	MOV. L @WORK1,ER0	Sets as the input argument the dividend (signed 32 bits) set in the user program.				
	MOV. L @WORK2,ER1	Sets as the input argument the divisor (signed 32 bits) set in the user program.				
	<table><tr><td></td><td>JSR</td><td>@DIVS</td><td></td></tr></table>		JSR	@DIVS		Subroutine call to DIVS.
	JSR	@DIVS				

4.15.5 Principles of Operation

- Negative dividends and divisors are converted to positive.
- Division finds the quotient and remainder by repeatedly subtracting. In figure 4.58, H'0D is divided by H'03 as an example of the division operation.
 - i. Sets the number of shifts in the counter R3L (which indicates the number of shifts).
 - ii. The dividend is shifted 1 bit to the left and the MSB loaded in the C bit is set in the LSB of ER2 (which stores the remainder).
 - iii. The divisor is subtracted from ER2. When the result of subtraction is positive, the LSB of ER0 is set. ((1) to (2) to (3) in figure 4.58). When the results of subtraction is negative, the LSB of ER0 is cleared and the divisor is added to the results of subtraction, returning it to the state prior to subtraction. ((4) to (5) to (6) in figure 4.58).
 - iv. The shift counter set in step (i) is decremented.
 - v. Steps (ii) through (iv) are repeated until the shift counter reaches -1.
- The quotient and/or remainder is then converted to negative if the sign flag is 1, as shown in table 4.30.

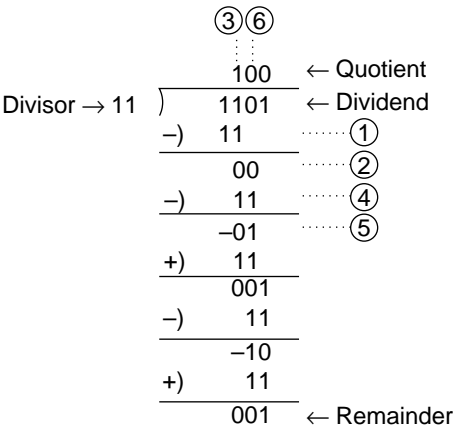


Figure 4.58 Division Example

Table 4.30 Sign of Results of Division and the Sign Flag

Dividend	Divisor	Quotient	Remainder	Quotient Sign Flag	Remainder Sign Flag
Positive	Positive	Positive	Positive	0	0
	Negative	Negative	Positive	1	0
Negative	Positive	Negative	Negative	1	1
	Negative	Positive	Positive	0	0

4.15.6 Program Listing

4.16 8-Digit Decimal Addition

MCU: H8/300H Series

Label Name: ADDD

Functions Used: DAA.B Instruction

Function: Does addition in the format: Summand (8-digit 4-bit BCD) × addend (8-digit 4-bit BCD) = sum (8-digit 4-bit BCD).

Table 4.31 ADDD Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Summand (8-digit 4-bit BCD)	ER0	4
	Summand (8-digit 4-bit BCD)	ER1	4
Output	Sum (8-digit 4-bit BCD)	ER0	4
	Presence of carry (Yes, C = 1; No, C = 0)	C flag	1

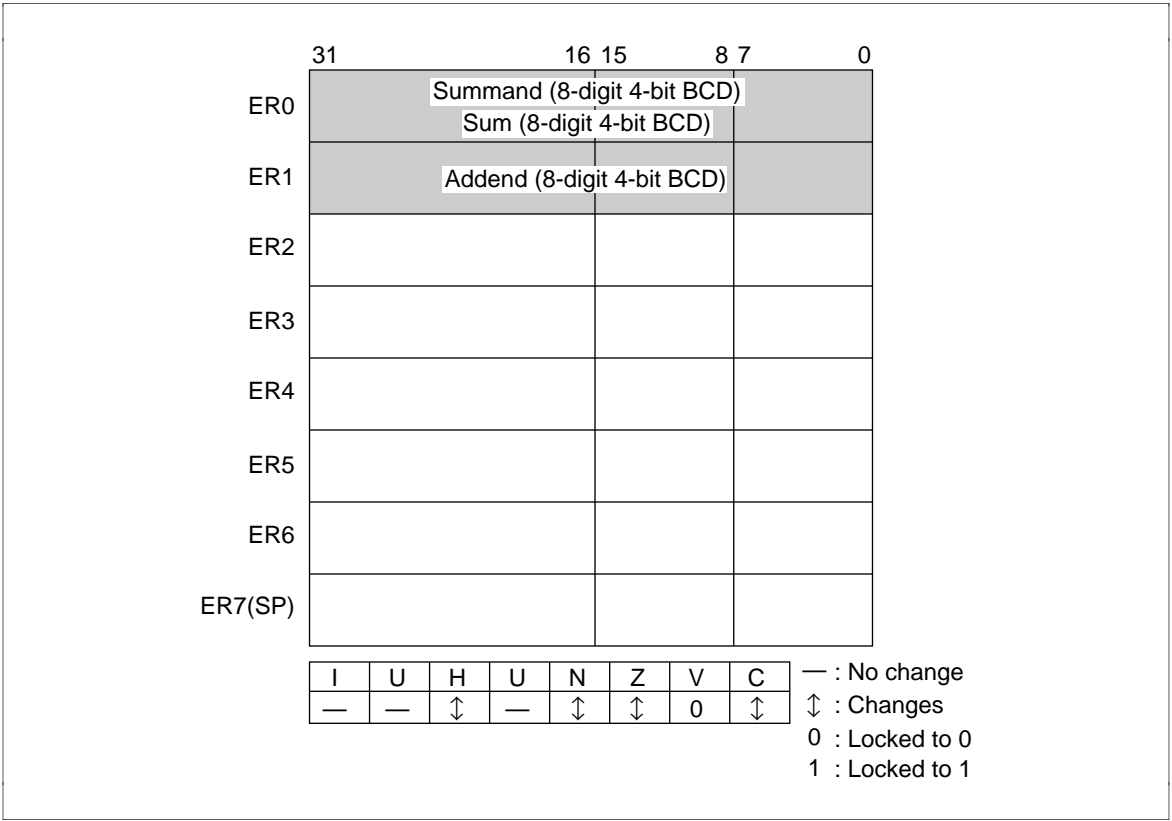


Figure 4.59 Changes in Internal Registers and Flag Changes for DIVS

Program memory (bytes)
28
Data memory (bytes)
0
Stack (bytes)
0
Number of states
36
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Figure 4.60 Programming Specifications

4.16.1 Description of Functions

Arguments are as follows:

- ER0: Sets the summand (8-digit 4-bit BCD) as an input argument. Sets the sum (8-digit 4-bit BCD) as an output argument.
- ER1: Sets the addend (8-digit 4-bit BCD) as an input argument.
- C flag (CCR): Indicates whether there is carrying after ADDD is executed.
 - C flag = 1: Indicates there is a carry.
 - C flag = 0: Indicates there is no carry.

Figure 4.61 is an example of execution of the software ADDD. When the input arguments are set as shown, the sum is set in ER0.

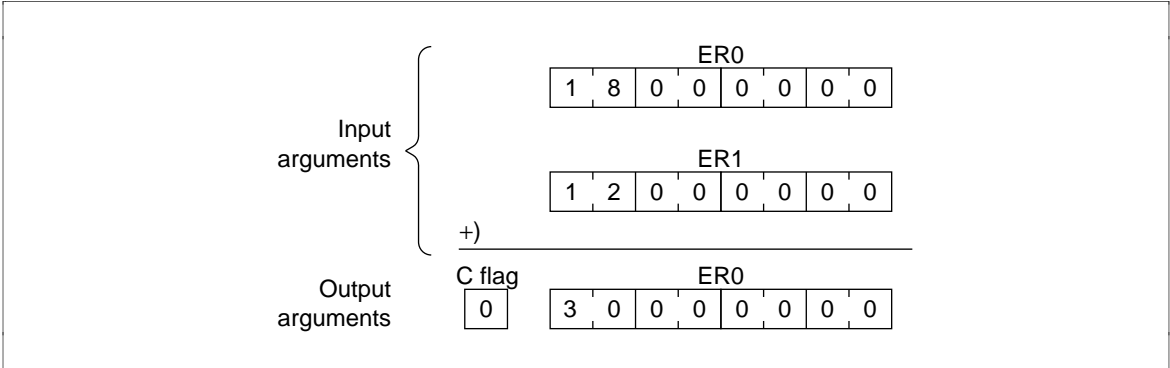


Figure 4.61 Executing ADDD

4.16.2 Cautions for Use

Since the results of addition are set in the register used to set the summand, the summand is destroyed after ADDD is executed. When you will still require the summand after executing ADDD, save it elsewhere in memory beforehand.

4.16.3 Description of Data Memory

No data memory is used by ADDD

4.16.4 Examples of Use

After setting the summand and addend, do a subroutine call to ADDD.

Table 4.32 Block Transfer Example (ADDD)

Label	Instruction	Action				
WORK 1	.RES. L 1	Reserves the data memory area that sets the summand (8-digit 4-bit BCD) in the user program.				
WORK 2	.RES. L 1	Reserves the data memory area that sets the addend (8-digit 4-bit BCD) in the user program.				
	MOV. L @WORK1,ER0	Sets as the input argument the summand set in the user program.				
	MOV. L @WORK2,ER1	Sets as the input argument the addend set in the user program.				
	⋮	Subroutine call to ADDD.				
	<table border="1"><tr><td></td><td>JSR</td><td>@ADDD</td><td></td></tr></table>		JSR	@ADDD		
	JSR	@ADDD				
	BCS OVER					
	⋮	When the results of addition produce carrying, the program branches to the processing routine for carrying.				
OVER	<table border="1"><tr><td>Processing routine for carrying over</td></tr></table>	Processing routine for carrying over				
Processing routine for carrying over						
	⋮					

4.16.5 Principles of Operation

- Binary addition occurs in 2-digit increments from the bottom and the results of addition are corrected into 2 digits of 4-bit BCD by the DAA.B instruction. This process is repeated four times.
- Addition of everything after the initial bottom 2 digits is performed by ADDX.B (addition with carrying instruction), since carrying occurs.
- In the extended register in which the upper four digits of the summand and addend are stored, the DAA.B and ADDX.B instructions cannot be used, so the upper 4 digits of the summand and addend are added after transfer to the general registers.

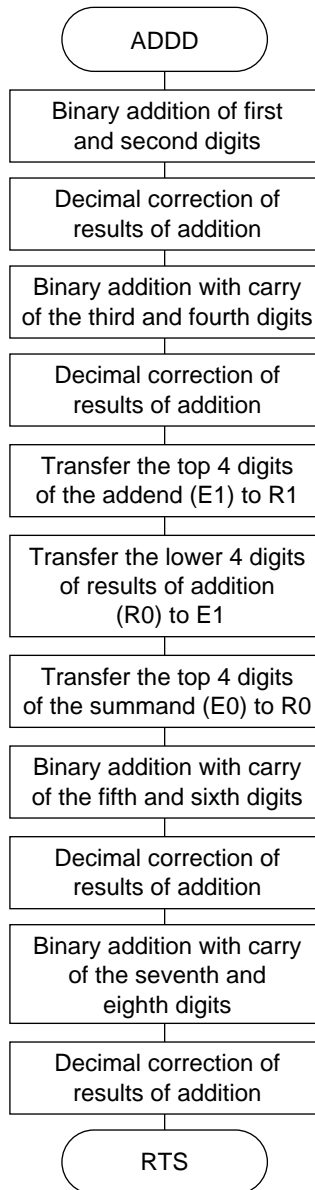


Figure 4.62 ADDD Flowchart

4.16.6 Program Listing

4.17 8-Digit Decimal Subtraction

MCU: H8/300H Series

Label Name: SUBD

Functions Used: DAS.B Instruction

Function: Does subtraction in the format: Minuend (8-digit 4-bit BCD) – subtrahend (8-digit 4-bit BCD) = difference (8-digit 4-bit BCD).

Table 4.33 SUBD Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Minuend (8-digit 4-bit BCD)	ER0	4
	Subtrahend (8-digit 4-bit BCD)	ER1	4
Output	Difference (8-digit 4-bit BCD)	ER0	4
	Presence of borrow (Yes, C = 1; No, C = 0)	C flag (CCR)	1

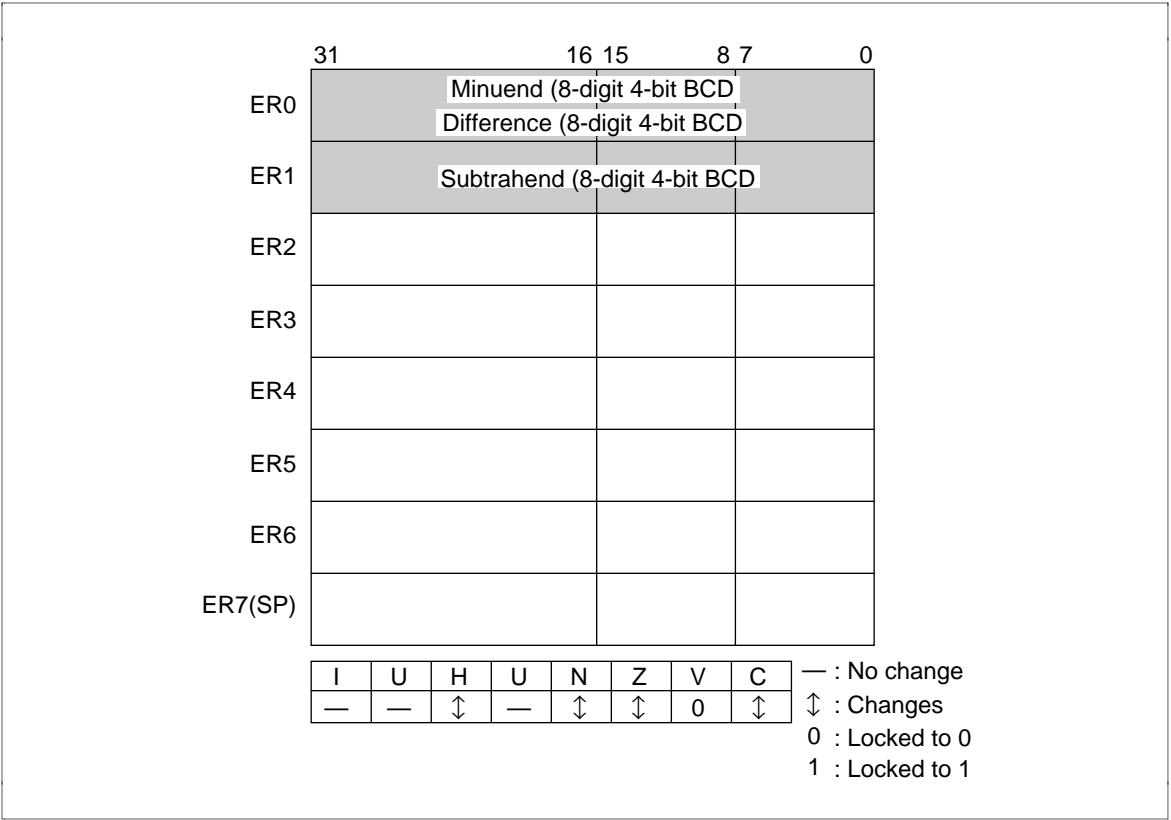


Figure 4.63 Changes in Internal Registers and Flag Changes for SUBD

Program memory (bytes)
28
Data memory (bytes)
0
Stack (bytes)
0
Number of states
36
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Figure 4.64 Programming Specifications

4.17.1 Description of Functions

Arguments are as follows:

- ER0: Sets the minuend (8-digit 4-bit BCD) as an input argument. Sets the difference (8-digit, 4-bit BCD) as an output argument.
- ER1: Sets the subtrahend (8-digit 4-bit BCD) as an input argument.
- C flag (CCR): Indicates whether there is borrowing after SUBD is executed.
 - C flag = 1: Indicates there is a borrow.
 - C flag = 0: Indicates there is no borrow.

Figure 4.65 is an example of execution of the software SUBD. When the input arguments are set as shown, the difference is set in ER0.

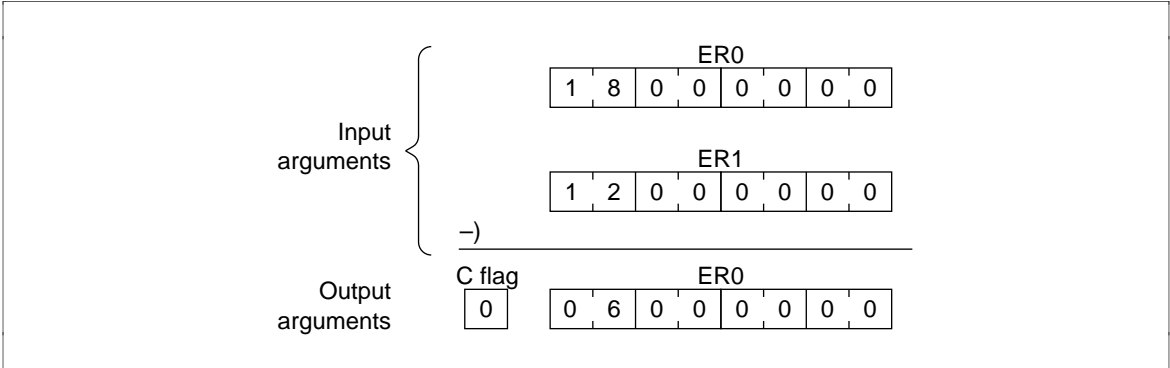


Figure 4.65 Executing SUBD

4.17.2 Cautions for Use

Since the results of subtraction are set in the register used to set the minuend, the minuend is destroyed after SUBD is executed. When you will still require the minuend after executing SUBD, save it elsewhere in memory beforehand.

4.17.3 Description of Data Memory

No data memory is used by SUBD.

4.17.4 Examples of Use

After setting the minuend and subtrahend, do a subroutine call to SUBD.

Table 4.34 Block Transfer Example (SUBD)

Label	Instruction	Action				
WORK 1	.RES. L 1	Reserves the data memory area that sets the minuend (8-digit 4-bit BCD) in the user program.				
WORK 2	.RES. L 1	Reserves the data memory area that sets the subtrahend (8-digit 4-bit BCD) in the user program.				
	MOV. L @WORK1,ER0	Sets as the input argument the minuend set in the user program.				
	MOV. L @WORK2,ER1	Sets as the input argument the subtrahend set in the user program.				
	⋮	Subroutine call to SUBD.				
	<table border="1"><tr><td></td><td>JSR</td><td>@SUBD</td><td></td></tr></table>		JSR	@SUBD		
	JSR	@SUBD				
	BCS OVER					
	⋮	When the results of subtraction produce borrowing, the program branches to the processing routine for borrowing.				
OVER	<table border="1"><tr><td>Processing routine for borrowing</td></tr></table>	Processing routine for borrowing				
Processing routine for borrowing						
	⋮					

4.17.5 Principles of Operation

- Binary subtraction occurs in 2-digit increments from the bottom and the results of subtraction are corrected into 2 digits of 4-bit BCD by the DAS.B instruction. This process is repeated four times.
- Subtraction of everything after the initial bottom 2 digits is performed by SUBX.B (subtraction with borrowing instruction), since borrowing occurs.
- In the extended register in which the upper four digits of the minuend and subtrahend are stored, the DAS.B and SUBX.B instructions cannot be used, so the upper 4 digits of the minuend and subtrahend are subtracted after transfer to the general registers.

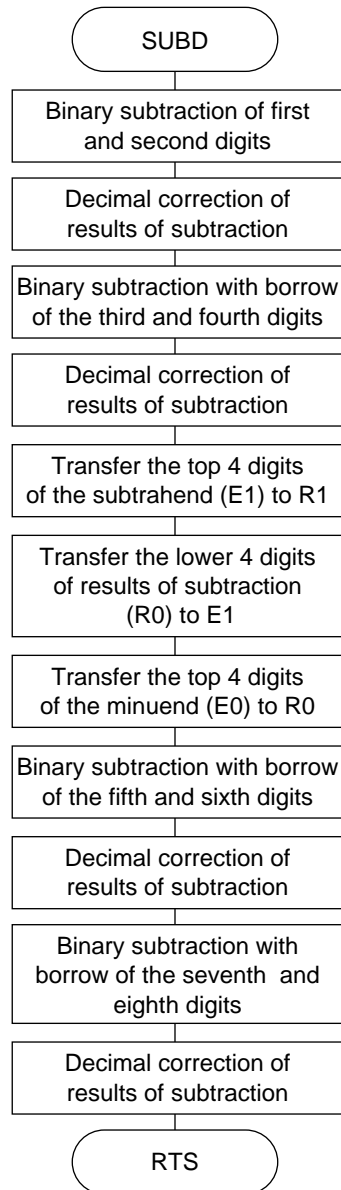


Figure 4.66 SUBD Flowchart

4.17.6 Program Listing

4.18 Sum of Products

MCU: H8/300H Series

Label Name: SEKIWA

Functions Used: MULXU.W Instruction

Function: Does the following sum of products on unsigned 16-bit data a_n, b_n ($n = 1, 2, \dots, n$) from data tables a and b. The maximum number of data n is 255.

$$\sum_{n=1}^n a_n b_n = a_1 b_1 + a_2 b_2 + \dots + a_n b_n$$

Table 4.35 SEKIWA Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Start address of data table a	ER0	4
	Start address of data table b	ER1	4
	Number of data n	R3H	1
Output	Results of sum of products (top 8 bits)	R3L	1
	Results of sum of products (bottom 32 bits)	ER2	4

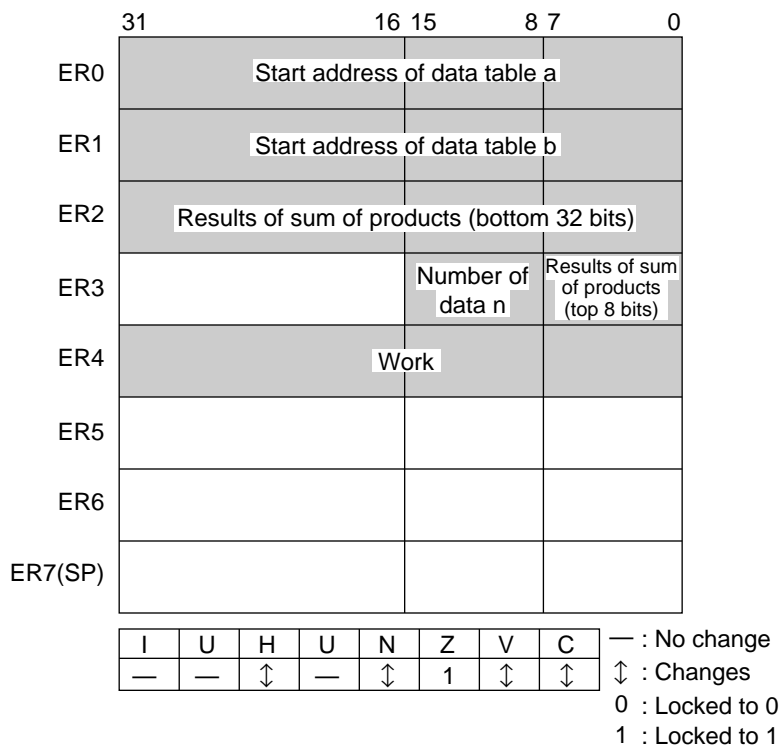


Figure 4.67 Changes in Internal Registers and Flag Changes for SUBD

Program memory (bytes)
20
Data memory (bytes)
0
Stack (bytes)
0
Number of states
11234
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states in the programming specifications is the value when the number of data n is H'FF.

Figure 4.68 Programming Specifications

4.18.1 Description of Functions

Arguments are as follows:

- ER0: Sets the start address of data table a (multiplicands) as an input argument.
- ER1: Sets the start address of data table b (multipliers) as an input argument.
- R3H: Sets the number as an input argument.
- R3L: Sets the top 8 bits of the result of the sum of products operation as an output argument.
- ER2: Sets the bottom 32 bits of the result of the sum of products operation as an output argument.

Figure 4.69 is an example of execution of the software. When the start address of data table a, start address of data table b, and number are set as shown, the top 8 bits of the result of the sum of products operation are set in R3L and bottom 32 bits of the result of the sum of products operation are set in ER2.

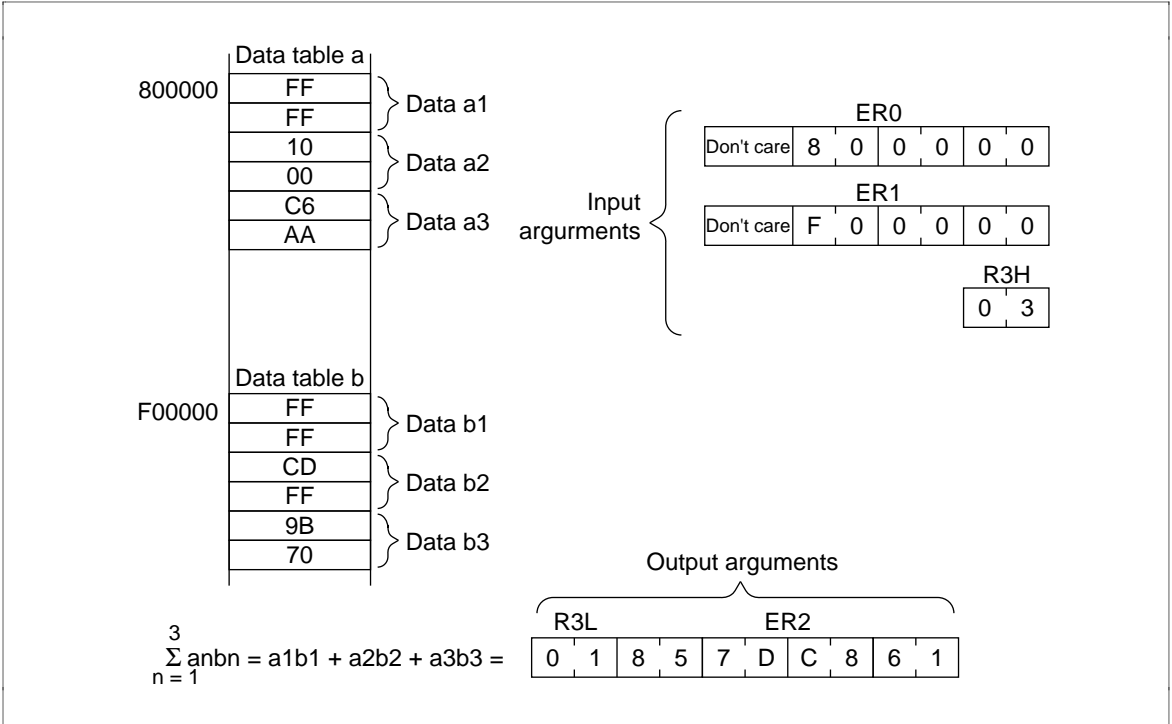


Figure 4.69 Executing SEKIWA

4.18.2 Cautions for Use

Since R0H is 1 byte, set data in the range $H'01 \leq R3H \leq H'FF$.

4.18.3 Description of Data Memory

No data memory is used by SEKIWA.

4.18.4 Examples of Use

After setting the start address of data table a, start address of data table b and number, do a subroutine call to SEKIWA.

Table 4.36 Block Transfer Example (SEKIWA)

Label	Instruction	Action
WORK 1	.RES. L 1	Reserves the data memory area that sets the start address of data table a in the user program.
WORK 2	.RES. L 1	Reserves the data memory area that sets the start address of data table b in the user program.
WORK 3	.RES. B 1	Reserves the data memory area that sets the number in the user program.
	MOV. L @WORK1,ER0	Sets as the input argument the start address of data table a set in the user program.
	MOV. L @WORK2,ER1	Sets as the input argument the start address of data table b set in the user program.
	MOV. B @WORK3,R3H	Sets as the input argument the number set in the user program
	...	Subroutine call to SEKIWA.
	JSR @SEKIWA	

4.18.5 Principles of Operation

1. ER0 and ER1 are used as pointers to the addresses of the multiplicand (data table a) and multiplier (data table b) data. After the multiplicands and multipliers are set in E4 and R4 respectively, the program increments to the next data address by post-increment register indirect.
2. E4 and R4 are de-signed and multiplied.
3. The results of multiplication stored in ER4 are added to ER2, where the bottom 32 bits of the results of the sum of products are stored.
4. Because of carrying, addition of R3L, where the top 8 bits of the result of the sum of products is stored, uses addition with carrying.
5. R3H is decremented and the processes of steps 1 through 4 repeat until R3H = -1.

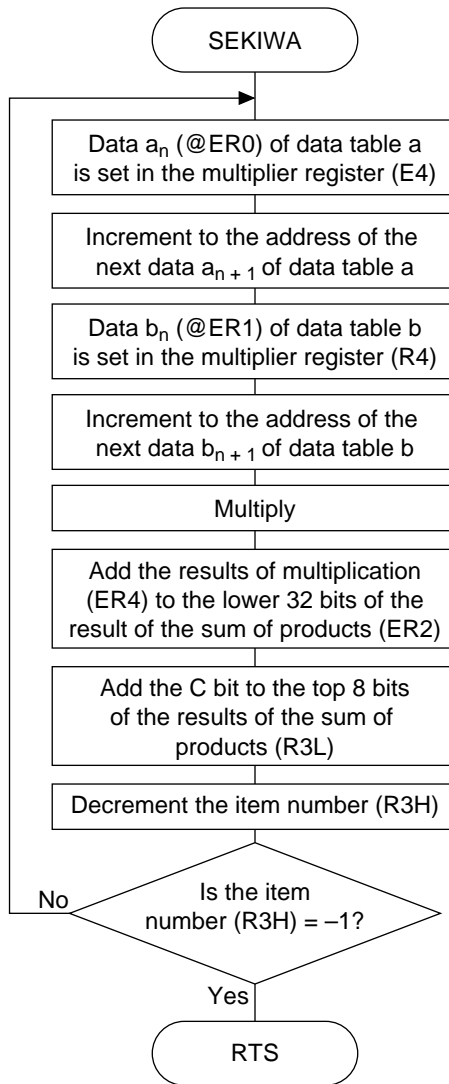


Figure 4.70 SEKIWA Flowchart

4.18.6 Program Listing

4.19 Sorting

MCU: H8/300H Series

Label Name: SORT

Functions Used: Post-Increment Register Indirect, Pre-Decrement Register Indirect

Function: Sorts data (unsigned 16 bits) of the data table from largest to smallest. The maximum number of data is 65535.

Table 4.37 SORT Arguments

	Contents	Storage Location	Data Length (Bytes)
Input	Number of sort data	R0	2
	Start address of data table	ER2	4
Output	—	—	—

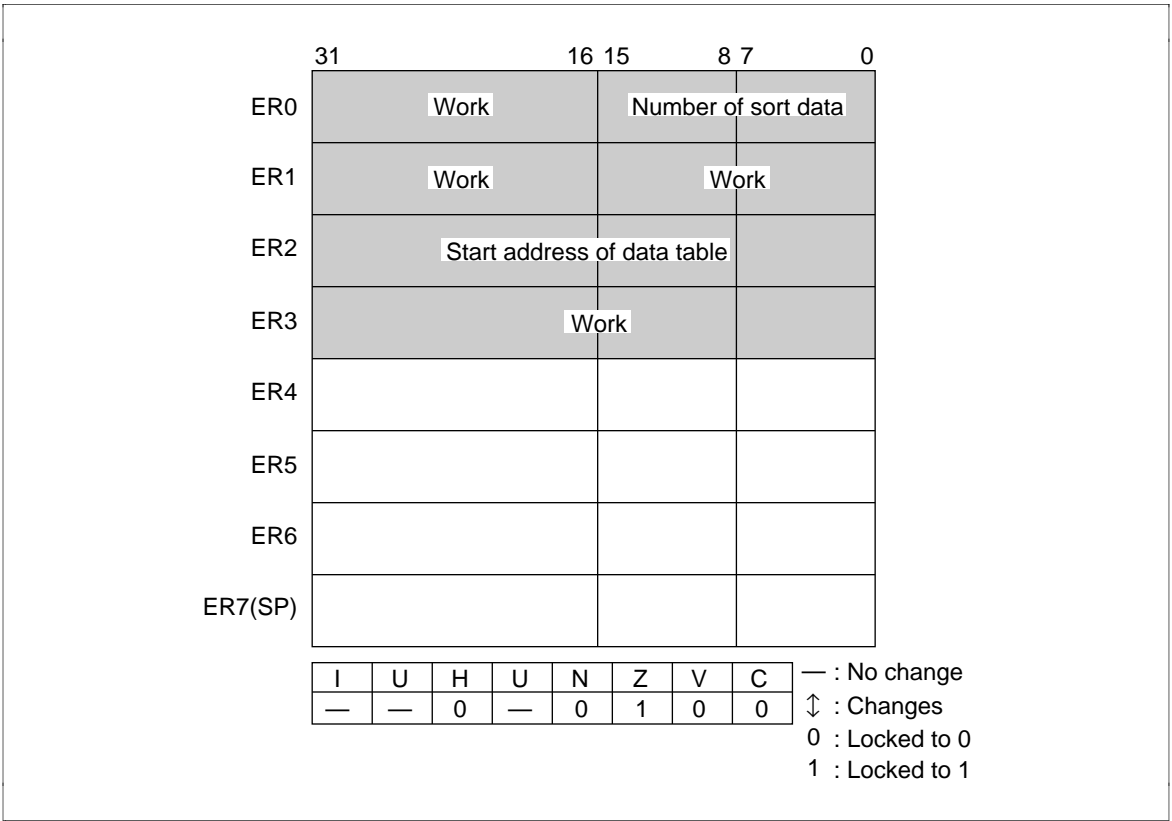


Figure 4.71 Changes in Internal Registers and Flag Changes for SORT

Program memory (bytes)
32
Data memory (bytes)
0
Stack (bytes)
0
Number of states
404
Re-entrant
Yes
Relocation
Yes
Interrupts during execution
Yes

Caution: The number of states in the programming specifications is the value when 5 words of data arranged smallest to largest is sorted into largest to smallest.

Figure 4.72 Programming Specifications

4.19.1 Description of Functions

Arguments are as follows:

- R0: Sets the number of sort data.
- ER1: Sets the start address of the data table.

Figure 4.73 is an example of execution of the SORT software. When the input arguments are set as shown, the data table data is sorted largest to smallest.

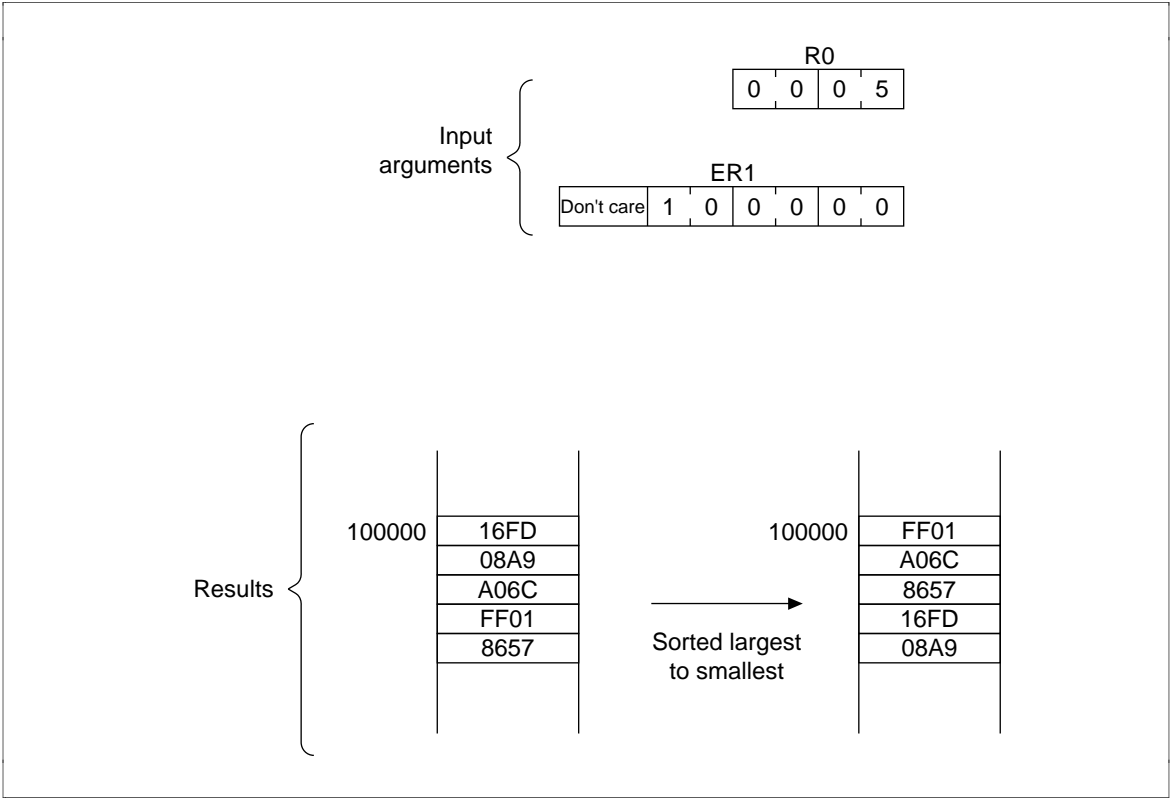


Figure 4.73 Executing SORT

4.19.2 Description of Data Memory

No data memory is used by SORT.

4.19.3 Examples of Use

After setting the start address of the data table and the number of sort data, do a subroutine call to SORT.

Table 4.38 Block Transfer Example (SORT)

Label	Instruction	Action
WORK 1	.RES. W 1	Reserves the data memory area that sets the number of sort data in the user program.
WORK 2	.RES. L 1	Reserves the data memory area that sets the start address of the data table in the user program.
	MOV. W @WORK1,R0	Sets as the input argument the number of sort data set in the user program.
	MOV. L @WORK2,ER1	Sets as the input argument the start address of the data table set in the user program.
	...	Subroutine call of SORT.
	JSR @SORT	

4.19.4 Principles of Operation

Figure 4.74 shows an example of sorting 3 items of data from largest to smallest.

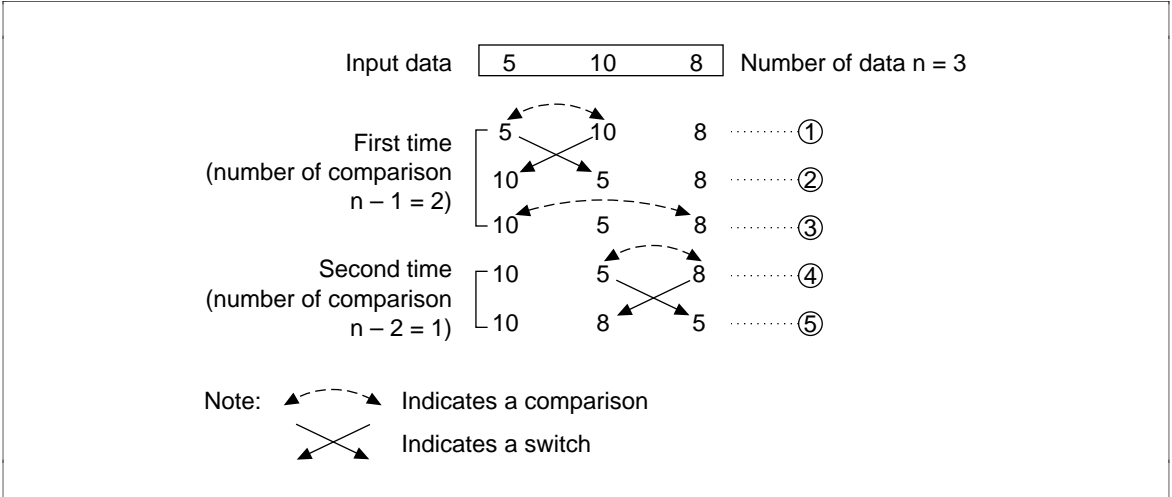


Figure 4.74 Sorting Example

1. Selects the largest of the 3 input data and places it at the far left ((1), (2) and (3) in figure 4.74).
2. Selects the largest data from second to left to the end and places it at the second place from left ((4) and (5) in figure 4.74).

4.19.5 Processing Method in Program

1. The number being compared (reference data) is set to E1 and the comparison number is set to R1; the comparison is then done. Since the data being compared is supposed to be the larger of the two numbers, the data are switched whenever the comparison number is larger.

2. ER3 is used as a pointer to the address of the comparison number. Using the post-increment register indirect method, the pointer is incremented to the address where the next comparison number is stored.
3. E0 is used as the counter that counts the number of comparisons done between data to find the largest item in the group of data. Each time a comparison is completed, E0 is decremented and the process repeats until E0 becomes 0.
4. ER2 is used as the pointer that indicates the address of the memory that stores the next largest value. Using the post-increment register indirect method, ER2 is incremented to the address that stores the next maximum value.
5. R0 is used as the counter that counts the number of determinations of the maximum value. Each time a maximum value is determined, R0 is decremented and the process repeats until R0 becomes 0.

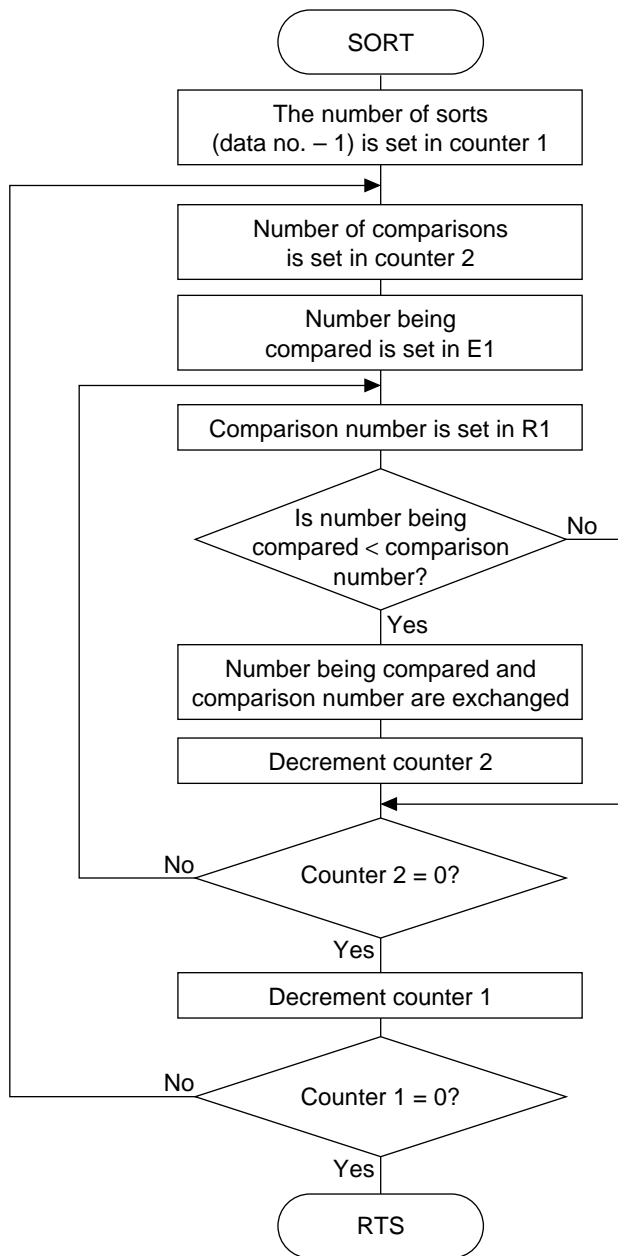


Figure 4.75 SORT Flowchart

4.19.6 Program Listing

Appendix A Instruction Set

Table A.1 Operation Symbols

Symbol	Description
PC	Program counter
SP	Stack pointer (ER7)
CCR	Condition code register
Z	Zero flag of condition code register
C	Carry flag of condition code register
Rs, Rd, Rn	General registers <data> (8 bits: R0H/R0L–R7H/R7L and 16 bits: R0–R7, E0–E7)
ERs, ERd	General registers <address> (24 bits: ER0–ER7), <data> (32 bits: ER0–ER7)
d:8, d:16, d:24	Displacement: 8 bits/16 bits/24 bits
#xx:2/3/8/16/32	Immediate data: 2 bits/3 bits/8 bits/16 bits/32 bits
→	Left end operand transferred to right end operand
+	Add operands of both sides
-	Subtract right end operand from left end operand
×	Multiply both operands
÷	Divide left end operand by right end operand
^	AND of both operands
∨	OR of both operands
⊕	Exclusive OR of both end operands
	Logical complement (complement of 1)
() < >	Description of execution address of operand

Table A.2 Condition Code Symbols

Symbol	Description
↑ ↓	Changes with the results of operation
*	Undetermined. Value not guaranteed.
0	Always cleared to 0.
-	No effect on operation.

- Notes:
1. (The number of execution states is the value when the operation code and operand data is in the 2-cycle area that is word accessible, such as on-chip RAM.)
 2. For a word-size operation: When there is a carry or borrow to or from bit 11, this bit is set to 1; otherwise, it is cleared to 0.
 3. For a longword size operation: When there is a carry or borrow to or from bit 27, this bit is set to 1; otherwise, it is cleared to 0.
 4. When the operation result is 0, the value prior to the operation is held; otherwise, it is cleared to 0.
 5. Set to 1 when the results of correction causes a carry; otherwise, the value prior to the operation is held.
 6. The number of execution states is $4n+8$ when the value set for R4L (for EEPMOV.B) or R4 (for EEPMOV.W) is n .
 7. Do not use the E clock synchronous transfer instruction with the H8/3003.

A1 Number of Execution States

The number of execution states for the instruction set is the value when the operation code and operand data is in the 2-cycle area that is word accessible, such as on-chip RAM. Operation code resides in external memory, but its attributes (byte/word access, 2/3 state access, wait/not wait, number of waits) can be set with the bus controller and wait state controller. The attributes of the on-chip peripheral modules are fixed and come in two types: 3-state word access modules and 3-state byte access modules. These combinations increase the number of execution states by the number of states indicated in the following table.

Table A.3 Increase in Number of Execution States by Operand Data

Access Conditions	Data Type	Increase in Number of Execution States	
External address (2-state byte access)	Byte	0	
	Word		2
External address/on-chip RAM (2-state word access)	Byte	0	
	Word		0
On-chip peripheral module (3-state byte access)	Byte	1	
	Word		4
On-chip peripheral module (3-state word access)	Byte	1	
	Word		1
External address (3-state byte access m cycle wait)	Byte	1 + m	
	Word		4 + 2m
External address (3-state word access m cycle wait)	Byte	1 + m	
	Word		1 + m

Table A.4 Increase in Number of Execution States by Operand Code

Access Conditions	Increase in Number of Execution States					
	Instruction Length (Byte)	2	4	6	8	10
External address (2-state byte access)	Nonbranch	2	4	6	8	10
	Branch	4	6	-	-	-
External address/on-chip RAM (2-state word access)	Nonbranch	0	0	0	0	0
	Branch	0	0	-	-	-
External address (3-state byte access m cycle wait)	Nonbranch	4 + 2m	8 + 4m	12 + 6m	16 + 8m	20 + 10m
	Branch	8 + 4m	12 + 6m	-	-	-
External address (3-state word access m cycle wait)	Nonbranch	1 + m	2 + 2m	3 + 3m	4 + 4m	5 + 5m
	Branch	2 + 2m	3 + 3m	-	-	-

Table A.5 Instruction List

Mnemonic		Op. Sz.	Operation	Addressing Mode/ Instruction Length										Condition Code							No. of Execution States
				#xx:	Rn	@ERn	@(d: , ERn)	@-ERn/@ERN+	@aa:	@(d: , PC)	@@aa	Implied	I	UI	H	N	Z	V	C		
Data transfer instr.	MOV.B #xx:8, Rd	B	#xx:8→Rd8	2									—	—	—	↑	↑	0	—	2	
	MOV.B Rs,Rd	B	Rs8→Rd8	2									—	—	—	↑	↑	0	—	2	
	MOV.B @ERs,Rd	B	@ERs→Rd8		2								—	—	—	↑	↑	0	—	4	
	MOV.B @(d:16,ERs)Rd	B	@(d:16,ERs)→Rd8			4							—	—	—	↑	↑	0	—	6	
	MOV.B @(d:24,ERs),Rd	B	@(d:24,ERs)→Rd8			8							—	—	—	↑	↑	0	—	10	
	MOV.B @ERs+,Rd	B	@ERs→Rd8, ERs+1→ERs				2						—	—	—	↑	↑	0	—	6	
	MOV.B @aa:8,Rd	B	@aa:8→Rd8					2					—	—	—	↑	↑	0	—	4	
	MOV.B @aa:16,Rd	B	@aa:16→Rd8						4				—	—	—	↑	↑	0	—	6	
	MOV.B @aa:24,Rd	B	@aa:24→Rd8							6			—	—	—	↑	↑	0	—	8	
	MOV.B Rs,@ERd	B	Rs8→@ERd		2								—	—	—	↑	↑	0	—	4	
	MOV.B Rs,@(d:16,ERd)	B	Rs8→@(d:16,ERd)			4							—	—	—	↑	↑	0	—	6	
	MOV.B Rs,@(d:24,ERd)	B	Rs8→@(d:24,ERd)			8							—	—	—	↑	↑	0	—	10	
	MOV.B Rs,@-ERd	B	ERd-1→ERd, Rs8→@ERd				2						—	—	—	↑	↑	0	—	6	
	MOV.B Rs,@aa:8	B	Rs8→@aa:8					2					—	—	—	↑	↑	0	—	4	
	MOV.B Rs,@aa:16	B	Rs8→@aa:16						4				—	—	—	↑	↑	0	—	6	
	MOV.B Rs,@aa:24	B	Rs8→@aa:24							6			—	—	—	↑	↑	0	—	8	
	MOV.W #xx:16, Rd	W	#xx:16→Rd16	4									—	—	—	↑	↑	0	—	4	
	MOV.W Rs,Rd	W	Rs16→Rd16		2								—	—	—	↑	↑	0	—	2	
	MOV.W @ERs,Rd	W	@ERs→Rd16			2							—	—	—	↑	↑	0	—	4	
	MOV.W @(d:16,ERs),Rd	W	@(d:16,ERs)→Rd16				4						—	—	—	↑	↑	0	—	6	
	MOV.W @(d:24,ERs),Rd	W	@(d:24,ERs)→Rd16				8						—	—	—	↑	↑	0	—	10	
	MOV.W @ERs+,Rd	W	@ERs→Rd16, ERs+2→ERs					2					—	—	—	↑	↑	0	—	6	
	MOV.W @aa:16,Rd	W	@aa:16→Rd16						4				—	—	—	↑	↑	0	—	6	

Table A.5 Instruction List (cont)

		Addressing Mode/ Instruction Length										Condition Code							No. of Execution States
		#xx: Rn	@ERn	@(d: , ERn)	@-ERn/@ERN+	@aa: @ (d: , PC)	@@aa	Implied	I	UI	H	N	Z	V	C				
Data transfer instr. (cont)	MOV.W @aa:24,Rd	W	@aa:24→Rd16				6				—	—	—	↑	↑	0	—	8	
	MOV.W Rs,@ERd	W	Rs16→@ERd		2						—	—	—	↑	↑	0	—	4	
	MOV.W Rs,@(d:16,ERd)	W	Rs16→ @(d:16,ERd)			4					—	—	—	↑	↑	0	—	6	
	MOV.W Rs,@(d:24,ERd)	W	Rs16→ @(d:24,ERd)			8					—	—	—	↑	↑	0	—	10	
	MOV.W Rs,@-ERd	W	ERd-2→ERd, Rs16→@ERd				2				—	—	—	↑	↑	0	—	6	
	MOV.W Rs,@aa:16	W	Rs16→@aa:16					4				—	—	—	↑	↑	0	—	6
	MOV.W Rs,@aa:24	W	Rs16→@aa:24						6			—	—	—	↑	↑	0	—	8
	MOV.L#xx:32, ERd	L	#xx:32→ERd32	6								—	—	—	↑	↑	0	—	6
	MOV.L ERs,ERd	L	ERs32→ERd32		2							—	—	—	↑	↑	0	—	2
	MOV.L @ERs,ERd	L	@ERs→ERd32			4						—	—	—	↑	↑	0	—	8
	MOV.L @ (d:16,ERs),ERd	L	@(d:16,ERs)→ ERd32				6					—	—	—	↑	↑	0	—	10
	MOV.L @ (d:24,ERs),ERd	L	@(d:24,ERs)→ ERd32					10				—	—	—	↑	↑	0	—	14
	MOV.L @ERs+,ERd	L	@ERs→ERd32, ERs+4→ERs						4			—	—	—	↑	↑	0	—	10
	MOV.L @aa:16,ERd	L	@aa:16→ERd32							6		—	—	—	↑	↑	0	—	10
	MOV.L @aa:24,ERd	L	@aa:24→ERd32								8	—	—	—	↑	↑	0	—	12
	MOV.L ERs,@ERd	L	ERs32→@ERd			4						—	—	—	↑	↑	0	—	8
	MOV.L ERs, @(d:16,ERd)	L	ERs32→ @(d:16,ERd)				6					—	—	—	↑	↑	0	—	10
	MOV.L ERs, @(d:24,ERd)	L	ERs32→ @(d:24,ERd)					10				—	—	—	↑	↑	0	—	14
	MOV.L ERs, @-ERd	L	ERd-4→ERd, ERs32→@ERd						4			—	—	—	↑	↑	0	—	10
	MOV.L ERs,@aa:16	L	ERs32→@aa:16							6		—	—	—	↑	↑	0	—	10
	MOV.L ERs,@aa:24	L	ERs32→@aa:24								8	—	—	—	↑	↑	0	—	12
Arith. Op instr	ADD.B #xx:8,Rd B	B	Rd8+#xx:8→Rd8	2							—	—	↑	↑	↑	↑	↑	2	
	ADD.B Rs,Rd B	B	Rd8+Rs8→Rd8		2						—	—	↑	↑	↑	↑	↑	2	

Table A.5 **Instruction List (cont)**

Mnemonic		Addressing Mode/ Instruction Length										Condition Code								No. of Execution States
		Op. Sz.	Operation	#xx:	Rn	@ ERn	@ (d: , ERn)	@ -ERn/@ ERn+	@ aa:	@ (d: , PC)	@ @aa	Implied	I	UI	H	N	Z	V	C	
Arith. op. instr. (cont)	ADD.W #xx:16,Rd	W	Rd16+#xx:16→Rd16	4								—	—	*1	↑	↑	↑	↑	4	
	ADD.W Rs,Rd	W	Rd16+Rs16→Rd16	2								—	—	*1	↑	↑	↑	↑	2	
	ADD.L #xx:32,ERd	L	ERd32+#xx:32→ERd32	6								—	—	*1	↑	↑	↑	↑	6	
	ADD.L ERs,ERd	L	ERd32+ERs32→ERd32	2								—	—	*1	↑	↑	↑	↑	2	
	ADDX.B #xx:8,Rd	B	Rd8+#xx:8+C→Rd8	2								—	—	↑	↑	*2	↑	↑	2	
	ADDX.B Rs,Rd	B	Rd8+Rs8+C→Rd8	2								—	—	↑	↑	*2	↑	↑	2	
	ADDS #1,ERd	L	ERd32+1→ERd32	2								—	—	—	—	—	—	—	2	
	ADDS #2,ERd	L	ERd32+2→ERd32	2								—	—	—	—	—	—	—	2	
	ADDS #4,ERd	L	ERd32+4→ERd32	2								—	—	—	—	—	—	—	2	
	INC.B Rd	B	Rd8+1→Rd8	2								—	—	—	↑	↑	↑	—	2	
	INC.W #1,Rd	W	Rd16+1→Rd16	2								—	—	—	↑	↑	↑	—	2	
	INC.W #2,Rd	W	Rd16+2→Rd16	2								—	—	—	↑	↑	↑	—	2	
	INC.L #1,ERd	L	ERd32+1→ERd32	2								—	—	—	↑	↑	↑	—	2	
	INC.L #2,ERd	L	ERd32+2→ERd32	2								—	—	—	↑	↑	↑	—	2	
	DAA Rd	B	Rd8 decimal correction→Rd8	2								—	—	*	↑	↑	*	*3	2	
	NEG.B Rd	B	0–Rd8→Rd8	2								—	—	↑	↑	↑	↑	↑	2	
	NEG.W Rd	W	0–Rd16→Rd16	2								—	—	*1	↑	↑	↑	↑	2	
	NEG.L ERd	L	0–ERd32→ERd32	2								—	—	*1	↑	↑	↑	↑	2	
	SUB.B Rs,Rd	B	Rd8–Rs8→Rd8	2								—	—	↑	↑	↑	↑	↑	2	
	SUB.W #xx:16,Rd	W	Rd16–#xx:16→Rd16	4								—	—	*1	↑	↑	↑	↑	4	
	SUB.W Rs,Rd	W	Rd16–Rs16→Rd16	2								—	—	*1	↑	↑	↑	↑	2	
	SUB.L #xx:32,ERd	L	ERd32–#xx:32→ERd32	6								—	—	*1	↑	↑	↑	↑	6	
	SUB.L ERs,ERd	L	ERd32–ERs32→ERd32	2								—	—	*1	↑	↑	↑	↑	2	
	SUBX.B #xx:8,Rd	B	Rd8–#xx:8–C→Rd8	2								—	—	↑	↑	*2	↑	↑	2	
	SUBX.B Rs,Rd	B	Rd8–Rs8–C→Rd8	2								—	—	↑	↑	*2	↑	↑	2	
	SUBS #1,ERd	L	ERd32–1→ERd32	2								—	—	—	—	—	—	—	2	
	SUBS #2,ERd	L	ERd32–2→ERd32	2								—	—	—	—	—	—	—	2	
	SUBS #4, ERd	L	ERd32–4→ERd32	2								—	—	—	—	—	—	—	2	
DEC.B Rd	B	Rd8–1→Rd8	2								—	—	—	↑	↑	↑	—	2		
DEC.W #1,Rd	W	Rd16–1→Rd16	2								—	—	—	↑	↑	↑	—	2		
DEC.W #2,Rd	W	Rd16–2→Rd16	2								—	—	—	↑	↑	↑	—	2		

Table A.5 Instruction List (cont)

Mnem- onic		Op. Sz.	Operation	Addressing Mode/ Instruction Length										Condition Code						No. of Execution States
				#xx: Rn	@ ERn	@ (d: , ERn)	@ -ERn@ERN+	@ aa:	@ (d: , PC)	@ @aa	Implied	I	UI	H	N	Z	V	C		
Arith. op. instr. (cont)	DEC.L #1,ERd	L	ERd32-1→ERd32	2								—	—	—	↑	↑	↑	—	2	
	DEC.L #2,ERd	L	ERd32-2→ERd32	2								—	—	—	↑	↑	↑	—	2	
	DAS Rd	B	Rd8 decimal correction→Rd8	2								—	—	*	↑	↑	*	—	2	
	CMP.B #xx:8, Rd	B	Rd8-#xx:8	2								—	—	↑	↑	↑	↑	↑	2	
	CMP.B Rs,Rd	B	Rd8-Rs8	2								—	—	↑	↑	↑	↑	↑	2	
	CMP.W #xx:16, Rd	W	Rd16-#xx:16	4								—	—	*1	↑	↑	↑	↑	4	
	CMP.W Rs,Rd	W	Rd16-Rs16	2								—	—	*1	↑	↑	↑	↑	2	
	CMP.L#xx:32, ERd	L	ERd32-#xx:32	6								—	—	*1	↑	↑	↑	↑	6	
	CMP.L ERs, ERd	L	ERd32-ERs32	2								—	—	*1	↑	↑	↑	↑	2	
	MULXU.B Rs, Rd	B	Rd8×Rs8→Rd16	2								—	—	—	—	—	—	—	14	
	MULXU.W Rs,ERd	W	Rd16×Rs16→ ERd32	2								—	—	—	—	—	—	—	22	
	DIVXU.B Rs,Rd	B	Rd16÷Rs8→Rd16 (H: remainder L: quotient)	2								—	—	—	—	—	—	—	14	
	DIVXU.W Rs,ERd	W	ERd32÷Rs16→ ERd16 (E: remainder, R: quotient)	2								—	—	—	↑	↑	—	—	22	
	MULXS.B Rs, Rd	B	Rd8×Rs8→Rd16	2								—	—	—	↑	↑	—	—	16	
	MULXS.W Rs,ERd	W	Rd16×Rs16→ ERd32	2								—	—	—	↑	↑	—	—	24	
	DIVXS.B Rs, Rd	B	Rd16÷Rs8→Rd16 (H: remainder, L: quotient)	2								—	—	—	↑	↑	—	—	16	
	DIVXS.W Rs,ERd	W	ERd32÷Rs16→ERd 16(E: remainder, R: quotient)	4								—	—	—	↑	↑	—	—	24	
	EXTU.W Rd	W	RdL8 zero extension→Rd16	2								—	—	—	↑	↑	0	—	2	
	EXTU.L ERd	L	RdL16 zero extension→Rd32	2								—	—	—	↑	↑	0	—	2	
	EXTS.W Rd	W	RdL8 sign extension→Rd16	2								—	—	—	↑	↑	0	—	2	
	EXTS.L ERd	L	Rd16 sign extension→ERd32	2								—	—	—	↑	↑	0	—	2	

Table A.5 Instruction List (cont)

		Addressing Mode/ Instruction Length										Condition Code							No. of Execution States
		#xx:	Rn	@ ERn	@ (d: , ERn)	@ -ERn/@ ERn+	@ aa:	@ (d: , PC)	@ @ aa	Implied	I	UI	H	N	Z	V	C		
Logical op. instr.	AND.B #xx:8,Rd	B	Rd8^#xx:8→Rd8	2								—	—	—	↑	↑	0	—	2
	AND.B Rs,Rd	B	Rd8^Rs8→Rd8		2							—	—	—	↑	↑	0	—	2
	AND.W #xx:16,Rd	W	Rd16^#xx:16→RD16	4								—	—	—	↑	↑	0	—	4
	AND.W Rs,Rd	W	Rd16^Rs16→Rd16		2							—	—	—	↑	↑	0	—	2
	AND.L #xx:32,ERd	L	ERd32^#xx:32→ERd32	6								—	—	—	↑	↑	0	—	6
	AND.L ERs,ERd	L	ERd32^ERs32→ERd32		4							—	—	—	↑	↑	0	—	4
	OR.B #xx:8,Rd	B	Rd8v#xx:8→Rd8	2								—	—	—	↑	↑	0	—	2
	OR.B Rs,Rd	B	Rd8vRs8→Rd8		2							—	—	—	↑	↑	0	—	2
	OR.W #xx:16,Rd	W	Rd16v#xx:16→Rd16	4								—	—	—	↑	↑	0	—	4
	OR.W Rs,Rd	W	Rd16vRs16→Rd16		2							—	—	—	↑	↑	0	—	2
	OR.L #xx:32,ERd	L	ERd32v#xx:32→ERd32	6								—	—	—	↑	↑	0	—	6
	OR.L ERs,ERd	L	ERd32vERs32→ERd32		4							—	—	—	↑	↑	0	—	4
	XOR.B #xx:8,Rd	B	Rd8@#xx:8→Rd8	2								—	—	—	↑	↑	0	—	2
	XOR.B Rs,Rd	B	Rd8@Rs8→Rd8		2							—	—	—	↑	↑	0	—	2
	XOR.W #xx:16,Rd	W	Rd16@#xx:16→Rd16	4								—	—	—	↑	↑	0	—	4
	XOR.W Rs,Rd	W	Rd16@Rs16→Rd16		2							—	—	—	↑	↑	0	—	2
	XOR.L #xx:32,ERd	L	ERd32@#xx:32→ERd32	6								—	—	—	↑	↑	0	—	6
	XOR.L ERs,ERd	L	ERd32@ERs32→ERd32		4							—	—	—	↑	↑	0	—	4
Shift instr.	NOT.B Rd	B	Rd8→Rd8		2							—	—	—	↑	↑	0	—	2
	NOT.W Rd	W	Rd16→Rd16		2							—	—	—	↑	↑	0	—	2
	NOT.L ERd	L	ERd32→ERd32		2							—	—	—	↑	↑	0	—	2
	SHAL.B Rd	B	Rd8 left arithmetic shift→Rd8		2							—	—	—	↑	↑	↑	↑	2
	SHAL.W Rd	W	Rd16 left arithmetic shift→Rd16		2							—	—	—	↑	↑	↑	↑	2
	SHAL.L ERd	L	ERd32 left arithmetic shift→ERd32		2							—	—	—	↑	↑	↑	↑	2
	SHAR.B Rd	B	Rd8 right arithmetic shift→Rd8		2							—	—	—	↑	↑	0	↑	2

Table A.5 Instruction List (cont)

Mnem- onic		Op. Sz.	Operation	Addressing Mode/ Instruction Length										Condition Code						No. of Execution States
				#xx:	Rn	@ERn	@(d: , ERn)	@-ERn/@ERN+	@aa:	@(d: , PC)	@@aa	Implied	I	UI	H	N	Z	V	C	
Shift instr. (cont)	SHAR.W Rd	W	Rd16 right arithmetic shift→Rd16		2								—	—	—	↑	↑	0	↑	2
	SHAR.L ERd	L	ERd32 right arithmetic shift→ERd32		2								—	—	—	↑	↑	0	↑	2
	SHLL.B Rd	B	Rd8 left logical shift→Rd8		2								—	—	—	↑	↑	0	↑	2
	SHLL.W Rd	W	Rd16 left logical shift→Rd16		2								—	—	—	↑	↑	0	↑	2
	SHLL.L ERd	L	ERd32 left logical shift→ERd32		2								—	—	—	↑	↑	0	↑	2
	SHLR.B Rd	B	Rd8 right logical shift→Rd8		2								—	—	—	0	↑	0	↑	2
	SHLR.W Rd	W	Rd16 right logical shift→RD16		2								—	—	—	0	↑	0	↑	2
	SHLR.L ERd	L	ERd32 right logical shift→ERd32		2								—	—	—	0	↑	0	↑	2
	ROTXL.B Rd	B	Rd8C left rotation→Rd8C		2								—	—	—	↑	↑	0	↑	2
	ROTXL.W Rd	W	Rd16C left rotation→Rd16C		2								—	—	—	↑	↑	0	↑	2
	ROTXL.L ERd	L	ERd32C left rotation→ERd32C		2								—	—	—	↑	↑	0	↑	2
	ROTXR.B Rd	B	Rd8C right rotation→Rd8C		2								—	—	—	↑	↑	0	↑	2
	ROTXR.W Rd	W	Rd16C right rotation→Rd16C		2								—	—	—	↑	↑	0	↑	2
	ROTXR.L ERd	L	ERd32C right rotation→ERd32C		2								—	—	—	↑	↑	0	↑	2
	ROTL.B Rd	B	Rd8 left rotation →Rd8		2								—	—	—	↑	↑	0	↑	2
	ROTL.W Rd	W	Rd16 left rotation →Rd16		2								—	—	—	↑	↑	0	↑	2
	ROTL.L ERd	L	ERd32 left rotation →ERd32		2								—	—	—	↑	↑	0	↑	2
	ROTR.B Rd	B	Rd8 right rotation →Rd8		2								—	—	—	↑	↑	0	↑	2
	ROTR.W Rd	W	Rd16 right rotation →Rd16		2								—	—	—	↑	↑	0	↑	2
	ROTR.L ERd	L	ERd32 right rotation→ERd32		2								—	—	—	↑	↑	0	↑	2

Table A.5 Instruction List (cont)

Mnem- onic	Op. Sz.	Operation	Addressing Mode/ Instruction Length										Condition Code							No. of Execution States
			#xx: Rn	@ERn	@(d: , ERn)	@-ERn/@ERN+	@aa: @aa	@(d: , PC)	@aa	Implied	I	UI	H	N	Z	V	C			
Bit man. instr.	BSET #xx:3,Rd	B (#xx:3 of Rd8)←1	2									—	—	—	—	—	—	2		
	BSET #xx:3@ERd	B (#xx:3 of @ERd)←1	4									—	—	—	—	—	—	8		
	BSET #xx:3@aa:8	B (#xx:3 of @aa:8)←1					4					—	—	—	—	—	—	8		
	BSET Rn,Rd	B (Rn8 of Rd8)←1	2									—	—	—	—	—	—	2		
	BSET Rn,@ERdB	B (Rn8 of @ERd)←1	4									—	—	—	—	—	—	8		
	BSET Rn,@aa:8B	B (Rn8 of @aa:8)←1					4					—	—	—	—	—	—	8		
	BCLR #xx:3, Rd	B (#xx:3 of Rd8)←0	2									—	—	—	—	—	—	2		
	BCLR #xx:3,@ERd	B (#xx:3 of @ERd)←0	4									—	—	—	—	—	—	8		
	BCLR #xx:3,@aa:8	B (#xx:3 of @aa:8)←0					4					—	—	—	—	—	—	8		
	BCLR Rn,Rd	B (Rn8 of Rd8)←0	2									—	—	—	—	—	—	2		
	BCLR Rn,@ERdB	B (Rn8 of @ERd)←0	4									—	—	—	—	—	—	8		
	BCLR Rn,@aa:8B	B (Rn8 of @aa:8)←0					4					—	—	—	—	—	—	8		
	BNOT #xx:3,Rd	B (#xx:3 of Rd8)←(#xx:3 of Rd8)	2									—	—	—	—	—	—	2		
	BNOT #xx:3, @ERD	B (#xx:3 of @ERd)←(#xx:3 of @ERd)	4									—	—	—	—	—	—	8		
	BNOT #xx:3, @aa:8	B (#xx:3 of @aa:8)←(#xx:3 of @aa:8)					4					—	—	—	—	—	—	8		
	BNOT Rn,Rd	B (Rn8 of Rd8)←(Rn8 of Rd8)	2									—	—	—	—	—	—	2		
	BNOT Rn, @ERd	B (Rn8 of @ERd)←(Rn8 of @ERd)	4									—	—	—	—	—	—	8		
	BNOT Rn, @aa:8	B (Rn8 of @aa:8)←(Rn8 of @ aa:8)					4					—	—	—	—	—	—	8		
	BTST #xx:3,Rd	B (#xx:3 of Rd8)→Z	2									—	—	—	—	↑	—	2		
	BTST #xx:3, @ERd	B (#xx:3 of @ERd)→Z	4									—	—	—	—	↑	—	6		
	BTST #xx:3, @aa:8	B (#xx:3 of @aa:8)→Z					4					—	—	—	—	↑	—	6		
	BTST Rn,Rd	B (Rn8 of Rd8)→Z	2									—	—	—	—	↑	—	2		
	BTST Rn,@ERdB	B (Rn8 of @ERd)→Z	4									—	—	—	—	↑	—	6		
	BTST Rn,@aa:8B	B (Rn8 of @aa:8)→Z					4					—	—	—	—	↑	—	6		
	BLD #xx:3,Rd	B (#xx:3 of Rd8)→C	2									—	—	—	—	—	↑	2		
	BLD #xx:3, @ERd	B (#xx:3 of @ERd)→C	4									—	—	—	—	—	↑	6		
	BLD #xx:3, @aa:8	B (#xx:3 of @aa:8)→C					4					—	—	—	—	—	↑	6		
	BILD #xx:3,Rd	B (#xx:3 of Rd8)→C	2									—	—	—	—	—	↑	2		
	BILD #xx:3, @ERd	B (#xx:3 of @ERd)→C	4									—	—	—	—	—	↑	6		

Table A.5 Instruction List (cont)

Mnem- onic	Op. Sz.	Operation	Addressing Mode/ Instruction Length										Condition Code							No. of Execution States
			#xx: Rn	@ ERn	@ (d: , ERn)	@ -ERN/@ERN+	@ aa: @ (d: , PC)	@ @aa	Implied	I	UI	H	N	Z	V	C				
Bit man. instr. (cont)	BILD #xx:3, @aa:8	B (#xx:3 of @aa:8) →C					4					—	—	—	—	—	—	6		
	BST #xx:3,Rd	B C→(#xx:3 of Rd8)	2									—	—	—	—	—	—	2		
	BST #xx:3, @ERd	B C→(#xx:3 of @ERd)		4								—	—	—	—	—	—	8		
	BST #xx:3, @aa:8	B C→(#xx:3 of @aa:8)				4						—	—	—	—	—	—	8		
	BIST #xx:3,Rd	B C→(#xx:3 of Rd8)	2									—	—	—	—	—	—	2		
	BIST #xx:3, @ERd	B C→(#xx:3 of @ERd)		4								—	—	—	—	—	—	8		
	BIST #xx:3, @aa:8	B C→(#xx:3 of @aa:8)				4						—	—	—	—	—	—	8		
	BAND #xx:3, Rd	B C^(#xx:3 of Rd8) →C	2									—	—	—	—	—	—	2		
	BAND #xx:3, @ERd	B C^(#xx:3 of @ERd)→C		4								—	—	—	—	—	—	6		
	BAND #xx:3, @aa:8	B C^(#xx:3 of @aa:8)→C				4						—	—	—	—	—	—	6		
	BIAND #xx:3, Rd	B C^(#xx:3 of Rd8)→C	2									—	—	—	—	—	—	2		
	BIAND #xx:3, @ERd	B C^(#xx:3 of @ERd)→C		4								—	—	—	—	—	—	6		
	BIAND #xx:3, @aa:8	B C^(#xx:3 of @aa:8)→C				4						—	—	—	—	—	—	6		
	BOR #xx:3,Rd	B Cv(#xx:3 of Rd8)→C	2									—	—	—	—	—	—	2		
	BOR #xx:3, @ERd	B Cv(#xx:3 of @ERd)→C		4								—	—	—	—	—	—	6		
	BOR #xx:3, @aa:8	B Cv(#xx:3 of @aa:8)→C				4						—	—	—	—	—	↑	6		
	BIOR #xx:3,Rd	B Cv(#xx:3 of Rd8)→C	2									—	—	—	—	—	↑	2		
	BIOR #xx:3, @ERd	B Cv(#xx:3 of @ERd)→C		4								—	—	—	—	—	↑	6		
	BIOR #xx:3, @aa:8	B Cv(#xx:3 of @aa:8)→C				4						—	—	—	—	—	↑	6		
	BXOR #xx:3, Rd	B C⊕ (#xx:3 of Rd8)→C	2									—	—	—	—	—	↑	2		
	BXOR #xx:3, @ERd	B C⊕ (#xx:3 of @ERd)→C		4								—	—	—	—	—	↑	6		
	BXOR #xx:3, @aa:8	B C⊕ (#xx:3 of @aa:8)→C				4						—	—	—	—	—	↑	6		
	BIXOR #xx:3, Rd	B C⊕ (#xx:3 of Rd8)→C	2									—	—	—	—	—	↑	2		

Table A.5 Instruction List (cont)

Mnem- onic		Op. Sz.	Operation	Addressing Mode/ Instruction Length										Condition Code							No. of Execution States
				#xx:	Rn	@ ERn	@ (d: , ERn)	@ -ERn/@ ERn+	@ aa:	@ (d: , PC)	@ @aa	Implied	I	UI	H	N	Z	V	C		
Bit man. instr. (cont)	BIXOR #xx:3, @ERd	B	C⊕ (#xx:3 of @ERd)→C		4							—	—	—	—	—	—	↕	6		
	BIXOR #xx:3, @aa:8	B	C⊕ (#xx:3 of @aa:8)→C					4				—	—	—	—	—	—	↕	6		
Branch instr.	Bcc d:8	—	if condition is true, then PC←PC+d:8 else next						2			—	—	—	—	—	—	—	4		
	Bcc d:16	—	If condition is true, then PC←PC+d:16 else next					4				—	—	—	—	—	—	—	6		
	JMP @ERn	—	PC←ERn		2							—	—	—	—	—	—	—	4		
	JMP @aa:24	—	PC←aa:24					4				—	—	—	—	—	—	—	6		
	JMP @@aa: 8(normal)	—	PC←(@aa:8)16							2		—	—	—	—	—	—	—	8		
	JMP @@aa: 8(advanced)	—	PC←(@aa:8)24							2		—	—	—	—	—	—	—	10		
	BSR d:8 (normal)	—	SP-2 →SP, PC16→@SP PC←PC+d:8						2			—	—	—	—	—	—	—	6		
	BSR d:8 (advanced)	—	SP-4 →SP, PC24→@SP PC←PC+d:8						2			—	—	—	—	—	—	—	8		
	BSR d:16 (normal)	—	SP-2 →SP, PC16→@SP PC←PC+d:16						4			—	—	—	—	—	—	—	6		
	BSR d:16 (advanced)	—	SP-4 →SP, PC24→@SP PC←PC+d:16						4			—	—	—	—	—	—	—	8		
	JSR @ERn (normal)	—	SP-2 →SP, PC16 →@SP PC←ERn		2							—	—	—	—	—	—	—	6		
	JSR @ERn (advanced)	—	SP-4 →SP, PC24→@SP PC←ERn		2							—	—	—	—	—	—	—	8		
	JSR @aa:24 (normal)	—	SP - 2→SP, PC16→@SP PC←aa:24					4				—	—	—	—	—	—	—	8		
	JSR @aa:24 (advanced)	—	SP - 4→SP, PC24→@SP PC←aa:24					4				—	—	—	—	—	—	—	10		
	JSR @@aa:8 (normal)	—	SP - 2→SP, PC16→@SP PC←(@aa:8)16							2		—	—	—	—	—	—	—	8		
	JSR @@aa:8 (advanced)	—	SP - 4→SP, PC24→@SP PC←(@aa:8)24							2		—	—	—	—	—	—	—	12		
	RTS (normal)	—	PC←(@SP)16 SP + 2→SP								2	—	—	—	—	—	—	—	8		

Table A.5 Instruction List

Mnem- onic	Op. Sz.	Operation	Addressing Mode/ Instruction Length										Condition Code							No. of Execution States
			#xx:	Rn	@ERn	@(d: , ERn)	@-ERn/@ERN+	@aa:	@(d: , PC)	@@aa	Implied	I	UI	H	N	Z	V	C		
System control instr.	RTS (advanced)	—	PC24←(@SP)24 SP + 4→SP								2	—	—	—	—	—	—	10		
	RTE	—	CCR←(@SP)8, PC24←(@SP)24 SP + 4→SP								2	↑	↑	↑	↑	↑	↑	10		
	TRAPA #xx:2	—	SP-4→SP, CCR←(@SP)8, PC24←(@SP)24, vector →PC								2	1	—	—	—	—	—	14		
	SLEEP	—	Enters sleep mode									—	—	—	—	—	—	2		
	NOP	—	No operation								2	—	—	—	—	—	—	2		
	LDC #xx:8,CCR	B	#xx:8→CCR	2								↑	↑	↑	↑	↑	↑	2		
	LDC Rs,CCR	B	Rs8→CCR		2							↑	↑	↑	↑	↑	↑	2		
	LDC @ERs, CCR	W	@ERs(even)→ CCR			4						↑	↑	↑	↑	↑	↑	6		
	LDC @ (d:16,ERs),CCR	W	@(d:16,ERs) (even)→CCR				6					↑	↑	↑	↑	↑	↑	8		
	LDC @ (d:24,ERs),CCR	W	@(d:24,ERs) (even)→CCR					10				↑	↑	↑	↑	↑	↑	12		
	LDC @ERs+, CCR	W	@ERs(even)→ CCR,ERs+2→ERs					4				↑	↑	↑	↑	↑	↑	8		
	LDC @aa:16, CCR	W	@aa:16(even)→ CCR						6			↑	↑	↑	↑	↑	↑	8		
	LDC @aa:24, CCR	W	@aa:24(even)→ CCR							8		↑	↑	↑	↑	↑	↑	10		
	STC CCR,Rd	B	CCR→Rd8		2							—	—	—	—	—	—	2		
	STC CCR, @ERd	W	CCR→@ERd (even)			4						—	—	—	—	—	—	6		
	STC CCR, @(d:16,ERd)	W	CCR→@(d:16, ERd)(even)				6					—	—	—	—	—	—	8		
	STC CCR, @(d:24,ERd)	W	CCR→@(d:24, ERd)(even)					10				—	—	—	—	—	—	12		
	STC CCR,@ -ERd	W	ERd-2→ERd, CCR →@ERd (even)						4			—	—	—	—	—	—	8		
	STC CCR, @aa:16	W	CCR→@aa:16 (even)							6		—	—	—	—	—	—	8		
	STC CCR, @aa:24	W	CCR→@aa:24 (even)								8	—	—	—	—	—	—	10		
	ANDC #xx:8, CCR	B	#xx:8^CCR→CCR	2								↑	↑	↑	↑	↑	↑	2		
	ORC #xx:8,CCR	B	#xx:8∨CCR→CCR	2								↑	↑	↑	↑	↑	↑	2		
	XORC #xx:8, CCR	B	#xx:8⊕CCR→CCR	2								↑	↑	↑	↑	↑	↑	2		

Appendix B Assembler

Control Instruction Functions

B.1 .CPU

Specifies the CPU.

Format:

Label	Operation	Operand
x	.CPU	CPU type

Note: CPU type: {300HA | 300HN | 300 | 300L}

Description: Specifies the CPU that the source program to be assembled is for. The assembler assembles it for the specified CPU. CPU types are as follows:

- 300HA H8/300H advanced mode
- 300HN H8/300H normal mode
- 300 H8/300
- 300L H8/300L

When this control instruction is omitted, 300HA is set.

This control instruction should be stated at the start of the source program. If there is nothing at the start of the source program except the control instruction for the assembler list, an error will result.

This control instruction is valid only once. It is valid when there is no /CPU command line option specified.

Example:

```
.CPU: 300HA
```

```
.SECTION A, CODE, ALIGN = 2
```

```
MOV.W R0, R1
```

```
MOV.W R0, R2
```

Assembles for H8/300H, advanced mode.

B.2 .SECTION

Declares the section.

Format:

Label	Operation	Operand
x	.SECTION	Section name [, section attributes [, format type]] type

Note: Section attributes: {CODE | DATA | STACK | COMMON | DUMMY}

Format type: {LOCATE = start address|ALIGN = boundary adjust number}

Description: Declares the start and restart of the section.

- Section start: Starts the section and sets the section name, section attributes and type of format.
 - Section name: Specifies the section name. Section names are written the same as symbol names. Case is not distinguished.
 - Section attributes: Sets the section attributes. Section attributes are as follows:

CODE: Code section

DATA: Data section

STACK: Stack section

COMMON: Common section

DUMMY: Dummy section

When no attribute is specified, CODE is set.

- Format type: Sets the format type:

LOCATE = start address Absolute addressing

ALIGN = boundary adjust number Relative addressing

When no format is specified, ALIGN = 2 is set.

With absolute addressing, the start address of the section is set. The start address is specified as a rear-referenced absolute value. The maximum start address values are as follows:

- H8/300H advanced mode: H'00FFFFFF
- H8/300H normal mode: H'0000FFFF
- H8/300: H'0000FFFF
- H8/300L: H'0000FFFF

Relative addressing sets the boundary adjust number of the section.

With the linker editor, the start address of the relative address section when linked to an object module is corrected to a multiple of the boundary adjust number. The boundary adjust number is specified as a rear-referenced absolute value. The boundary adjust number can be specified as a 2ⁿ value.

If no section is declared with this control instruction, the following is set as the default section.

```
.SECTION P, CODE, ALIGN=2
```

- Section restart: Restarts the section already existing in the source program. At section restart, the section name of the existing section is specified. The previously declared section attributes and formats are used.

Example:

```
.SECTION A, CODE, ALIGN=2                      ( 1 )
```

```
MOV.W R0, R1
```

```
.SECTION B, DATA, LOCATE=H'001000              ( 2 )
```

```
DATA1
```

```
.DATA.W H'0001
```

```
.SECTION A                                      ( 3 )
```

```
MOV.W      R0, R3
```

- Starts section A. The section name is A, the section attribute is code section, the format type is relative address format, and the boundary adjust number is 2.
- Starts section B. The section name is B, the section attribute is data section, the format type is absolute address format, and the start address is H'001000.
- Restarts section A.

B.3 .EQU

Sets the symbol value.

Format:

Label	Operation	Operand
Symbol name	.EQU	Number

Description: Sets a value for the symbol. The value is set as a rear-referenced absolute value or a rear-referenced address value. The symbol value defined by this control instruction cannot be changed.

Example:

```
SYM1      .EQU  1
SYM2      .EQU  2
.SECTION A, CODE, ALIGN = 2
MOV.B     #SYM1:8, R0L... Same as MOV.B   #1:8, R0L
MOV.B     #SYM2:8, R1L... Same as MOV.B   #2:8, R1L
```

Sets 1 for SYM1 and 2 for SYM2.

B.4 .ORG

Sets the location counter value.

Format:

Label	Operation	Operand
x	.ORG	Location counter value

Description: Changes the location counter value in the section to the specified value.

The location counter value is specified as a rear-referenced absolute value or as a rear-referenced address value of the section itself. The maximum location counter values are as follows.

H8/300H advanced mode: H'00FFFFFF

H8/300H normal mode: H'0000FFFF

H8/300: H'0000FFFF

H8/300L: H'0000FFFF

When specified in the absolute address section, the location counter value specified must be a value after the start address of the section.

When this control instruction is specified in the absolute address section, the set location counter value becomes an absolute address; when specified in the relative address section, it becomes a relative address.

Example:

```
.SECTION A, DATA, ALIGN = 2
DATA1
.DATA.W    H'0001
.DATA.W    H'0002
.ORG       H'000100    (1)
DATA2
.DATA.W    H'0003
.DATA.W    H'0004
```

(1) The location counter value is changed to the relative H'000100 address for A.

B.5 .DATA

Reserves integer data.

Format:

Label	Operation	Operand
x	.DATA [. s]	Integer data [, integer data ...]

Note: s (size): {B|W|L}

Description: Reserves integer data according to the size specified.

The sizes are as follows.

- B: Byte (1 byte)
- W: Word (2 byte)
- L: Longword (4 bytes)

When not specified, B is set.

The following integer data values can be specified according to size.

- B: -128 to 255
- W: -32,768 to 65,535
- L: -2,147,483,648 to 4,294,967,295

Example:

```
.SECTION A, DATA, ALIGN = 2
.DATA.W    H'0102, H'0304
.DATA.B    H'05, H'06, H'07, H'08
```

Data is reserved as follows:

01	02	03	04	05	06	07	08
----	----	----	----	----	----	----	----

B.6 .RES

Reserves the integer data region.

Format:

Label	Operation	Operand
[Symbol name]	.RES [. s]	Number of regions

Note: s (size): {B|W|L}

Description: Reserves integer data regions. A region of exactly the size specified for the integer data region is ensured.

The sizes are as follows:

- B: Byte (1 byte)
- W: Word (2 byte)
- L: Longword (4 bytes)

When not specified, B is set.

The number of regions is specified as a rear-referenced absolute value. Any number higher than 1 can be specified.

Example:

```
.SECTION A, DATA, ALIGN = 2
.RES.W      10
.RES.B      255
```

A 20 byte region and a 255 byte region are kept.

B.7 .END

End of source program.

Format:

Label	Operation	Operand
x	.END	[Execution start address]

Description: Indicates the end of the source program. When this control instruction appears, the assembler quits assembling. The execution start address allows you to specify the address used when the simulation is started on a simulation debugger. The code section address is set for the execution start address. The execution start address is specified as an absolute value or address value.

Example:

```
.CPU      300HA
.OUTPUT   DBG
:
.SECTION A, CODE, ALIGN = 2
START
MOV.L     #0:32, ER0
MOV.L     #1:32, ER1
MOV.L     #2:32, ER2
BRA       START:8
;
.END      START
```

In the simulation debugger, the simulation starts from the START address.