

IR480DG.HCB SERIES

HIGH POWER RECTIFIER DIODES

- **Junction Size:** Square 480 mils
- **Wafer Size:** 4"
- **V_{RRM} Class:** 600 and 1200 V
- **Passivation Process:** Glassivated MESA
- **Reference IR Packaged Part:** T110HF Series

Major Ratings and Characteristics

Parameters	Units	Test Conditions
V _{FM} Maximum Forward Voltage	940mV	T _J = 25°C I _F = 25A
V _{RRM} Reverse Breakdown Voltage Range	600 and 1200V	T _J = 25°C I _R = 100μA (1)

(1) Nitrogen flow on die edge.

Mechanical Characteristics

Nominal Back Metal Composition, Thickness	Cr - Ni - Ag (1 KA - 4 KA - 6 KA)
Nominal Front Metal Composition, Thickness	Cr - Ni - Ag (1 KA - 4 KA - 6 KA)
Chip Dimensions	480 x 480 mils (see drawing)
Wafer Diameter	100 mm, with std. < 110 > flat
Wafer Thickness	300μm
Maximum Width of Sawing Line	130μm
Reject Ink Dot Size	0.25 mm diameter minimum
Ink Dot Location	See drawing
Recommended Storage Environment	Storage in original container, in dessicated nitrogen, with no contamination

IR480DG..HCB Series


Bulletin I0137J 05/99

Ordering Information Table

Device Code						
IR	480	D	G	12	H	CB
①	②	③	④	⑤	⑥	⑦
1	- International Rectifier Device					
2	- Chip Dimension in Mils					
3	- Type of Device: D = Standard Recovery Diode					
4	- Passivation Process: G = Glassivated MESA					
5	- Voltage code: Code x 100 = V_{RRM}					
6	- Metallization: H = Silver (Anode) - Silver (Cathode)					
7	- Probed Uncut Die					

Available Class
06 = 600V
12 = 1200V

Outline Table

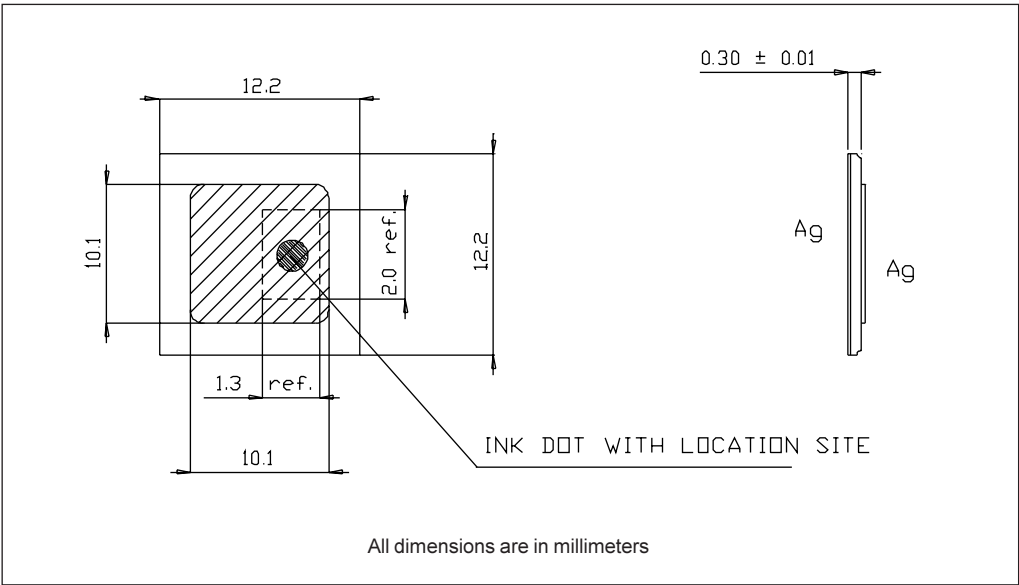

Wafer Layout

