




PD - 94210

**RADIATION HARDENED
POWER MOSFET
SURFACE MOUNT (LCC-28)**

Product Summary

Part Number	Radiation Level	R _{Ds(on)}	I _D
IRHQ597110	100K Rads (Si)	0.96Ω	-2.8A
IRHQ593110	300K Rads (Si)	0.98Ω	-2.8A

IRHQ597110**100V, Quad P-CHANNEL****RAD-Hard™ HEXFET®**
RS TECHNOLOGY

LCC-28

International Rectifier's RAD-Hard™ HEXFET® MOSFET Technology provides high performance power MOSFETs for space applications. This technology has over a decade of proven performance and reliability in satellite applications. These devices have been characterized for both Total Dose and Single Event Effects (SEE). The combination of low R_{Ds(on)} and low gate charge reduces the power losses in switching applications such as DC to DC converters and motor control. These devices retain all of the well established advantages of MOSFETs such as voltage control, fast switching, ease of paralleling and temperature stability of electrical parameters.

Features:

- Single Event Effect (SEE) Hardened
- Low R_{Ds(on)}
- Low Total Gate Charge
- Proton Tolerant
- Simple Drive Requirements
- Ease of Paralleling
- Hermetically Sealed
- Ceramic Package
- Surface Mount
- Light Weight

Absolute Maximum Ratings (Per Die)

Pre-Irradiation

	Parameter		Units
I _D @ V _{GS} = -12V, T _C = 25°C	Continuous Drain Current	-2.8	A
I _D @ V _{GS} = -12V, T _C = 100°C	Continuous Drain Current	-1.8	
I _{DM}	Pulsed Drain Current ①	-11.2	
P _D @ T _C = 25°C	Max. Power Dissipation	12	W
	Linear Derating Factor	0.1	W/C
V _{GS}	Gate-to-Source Voltage	±20	V
EAS	Single Pulse Avalanche Energy ②	70	mJ
I _{AR}	Avalanche Current ①	-2.8	A
E _{AR}	Repetitive Avalanche Energy ①	1.2	mJ
dv/dt	Peak Diode Recovery dv/dt ③	7.1	V/ns
T _J	Operating Junction	-55 to 150	°C
T _{TSG}	Storage Temperature Range		
	Pckg. Mounting Surface Temp.	300 (for 5s)	
	Weight	0.89 (Typical)	g

For footnotes refer to the last page

Electrical Characteristics @ $T_j = 25^\circ\text{C}$ (Unless Otherwise Specified) (Per Die)

	Parameter	Min	Typ	Max	Units	Test Conditions
BVDSS	Drain-to-Source Breakdown Voltage	-100	—	—	V	$V_{GS} = 0V, I_D = -1.0\text{mA}$
$\Delta BVDSS/\Delta T_J$	Temperature Coefficient of Breakdown Voltage	—	-0.13	—	V/ $^\circ\text{C}$	Reference to 25°C , $I_D = -1.0\text{mA}$
RDS(on)	Static Drain-to-Source On-State Resistance	—	—	1.2	Ω	$V_{GS} = -12V, I_D = -2.8\text{A}$ ④
		—	—	0.96		$V_{GS} = -12V, I_D = -1.8\text{A}$
VGS(th)	Gate Threshold Voltage	-2.0	—	-4.0	V	$V_{DS} = V_{GS}, I_D = -1.0\text{mA}$
gfs	Forward Transconductance	1.9	—	—	S (mS)	$V_{DS} > -15V, I_{DS} = -1.8\text{A}$ ④
IDSS	Zero Gate Voltage Drain Current	—	—	-10	μA	$V_{DS} = -80V, V_{GS}=0V$
		—	—	-25		$V_{DS} = -80V,$ $V_{GS} = 0V, T_J = 125^\circ\text{C}$
IGSS	Gate-to-Source Leakage Forward	—	—	-100	nA	$V_{GS} = -20V$
IGSS	Gate-to-Source Leakage Reverse	—	—	100		$V_{GS} = 20V$
Qg	Total Gate Charge	—	—	11	nC	$V_{GS} = -12V, I_D = -2.8\text{A}$
Qgs	Gate-to-Source Charge	—	—	3.0		$V_{DS} = -50V$
Qgd	Gate-to-Drain ('Miller') Charge	—	—	4.2		
t _{d(on)}	Turn-On Delay Time	—	—	20	ns	$V_{DD} = -50V, I_D = -2.8\text{A},$ $V_{GS} = -12V, R_G = 7.5\Omega$
t _r	Rise Time	—	—	24		
t _{d(off)}	Turn-Off Delay Time	—	—	32		
t _f	Fall Time	—	—	90		
L _S + L _D	Total Inductance	—	6.1	—	nH	Measured from the center of drain pad to center of source pad
C _{iss}	Input Capacitance	—	377	—	pF	$V_{GS} = 0V, V_{DS} = -25V$ $f = 1.0\text{MHz}$
C _{oss}	Output Capacitance	—	102	—		
C _{rss}	Reverse Transfer Capacitance	—	7.0	—		

Source-Drain Diode Ratings and Characteristics (Per Die)

	Parameter	Min	Typ	Max	Units	Test Conditions
I _S	Continuous Source Current (Body Diode)	—	—	-2.8	A	
I _{SM}	Pulse Source Current (Body Diode) ①	—	—	-11.2		
V _{SD}	Diode Forward Voltage	—	—	-5.0	V	$T_j = 25^\circ\text{C}, I_S = -2.8\text{A}, V_{GS} = 0V$ ④
t _{rr}	Reverse Recovery Time	—	—	138	nS	$T_j = 25^\circ\text{C}, I_F = -2.8\text{A}, dI/dt \leq 100\text{A}/\mu\text{s}$
Q _{RR}	Reverse Recovery Charge	—	—	555	nC	$V_{DD} \leq -50V$ ④
t _{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by L _S + L _D .				

Thermal Resistance (Per Die)

	Parameter	Min	Typ	Max	Units	Test Conditions
R _{thJC}	Junction-to-Case	—	—	11.8	°C/W	
R _{thJA}	Junction-to-Ambient	—	—	60		Typical socket mount

For footnotes refer to the last page

Pre-Irradiation

IRHQ597110

International Rectifier Radiation Hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at International Rectifier is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 5 and 6) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

Table 1. Electrical Characteristics @ $T_j = 25^\circ\text{C}$, Post Total Dose Irradiation ⑤⑥ (Per Die)

	Parameter	100K Rads(Si) ¹		300K Rads (Si) ²		Units	Test Conditions
		Min	Max	Min	Max		
BV_{DSS}	Drain-to-Source Breakdown Voltage	-100	—	-100	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = -1.0\text{mA}$
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	-2.0	-4.0	-2.0	-5.0	V	$\text{V}_{\text{GS}} = \text{V}_{\text{DS}}, \text{I}_D = -1.0\text{mA}$
I_{GSS}	Gate-to-Source Leakage Forward	—	-100	—	-100	nA	$\text{V}_{\text{GS}} = -20\text{V}$
I_{GSS}	Gate-to-Source Leakage Reverse	—	100	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
I_{DSS}	Zero Gate Voltage Drain Current	—	-10	—	-10	μA	$\text{V}_{\text{DS}} = -80\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ④ On-State Resistance (TO-39)	—	0.916	—	0.936	Ω	$\text{V}_{\text{GS}} = -12\text{V}, \text{I}_D = -1.8\text{A}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ④ On-State Resistance (LCC-28)	—	0.96	—	0.98	Ω	$\text{V}_{\text{GS}} = -12\text{V}, \text{I}_D = -1.8\text{A}$
V_{SD}	Diode Forward Voltage ④	—	-5.0	—	-5.0	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_S = -2.8\text{A}$

1. Part number IRHQ597110

2. Part number IRHQ593110

International Rectifier radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. a and Table 2.

Table 2. Single Event Effect Safe Operating Area (Per Die)

Ion	LET MeV/(mg/cm ²)	Energy (MeV)	Range (μm)	V_{DS} (V)				
				@ $\text{V}_{\text{GS}}=0\text{V}$	@ $\text{V}_{\text{GS}}=5\text{V}$	@ $\text{V}_{\text{GS}}=10\text{V}$	@ $\text{V}_{\text{GS}}=15\text{V}$	@ $\text{V}_{\text{GS}}=20\text{V}$
Cu	28.0	285	43.0	-100	-100	-100	-70	-60
Br	36.8	305	39.0	-100	-100	-70	-50	-40
I	59.8	343	32.6	-60	—	—	—	—

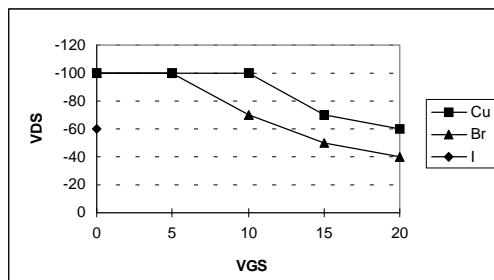
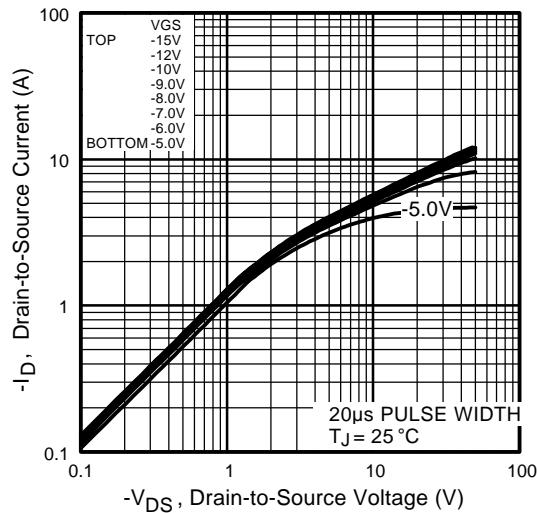
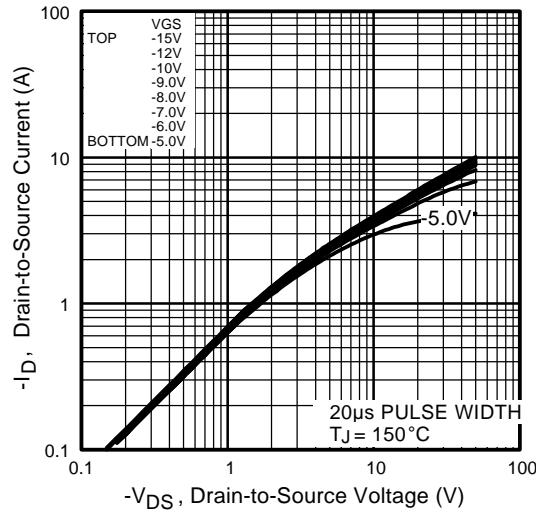
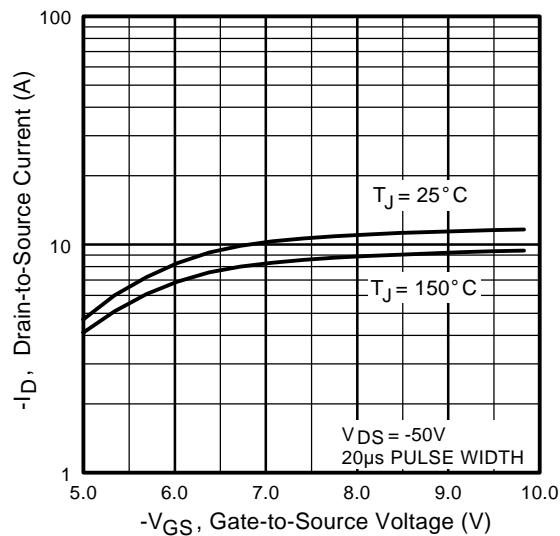
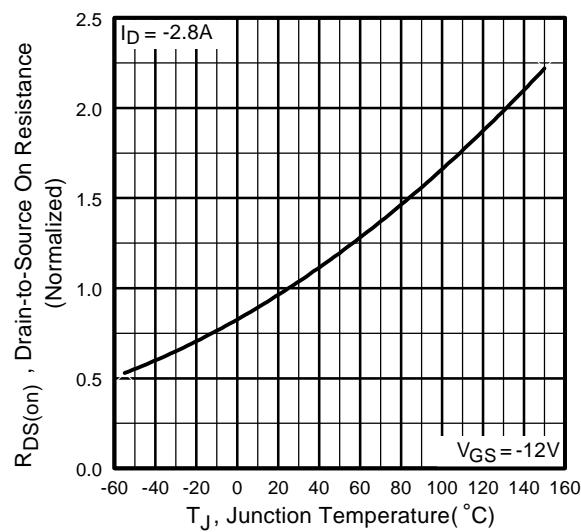


Fig a. Single Event Effect, Safe Operating Area

For footnotes refer to the last page

IRHQ597110**Pre-Irradiation****Fig 1.** Typical Output Characteristics**Fig 2.** Typical Output Characteristics**Fig 3.** Typical Transfer Characteristics**Fig 4.** Normalized On-Resistance Vs. Temperature

Pre-Irradiation

IRHQ597110

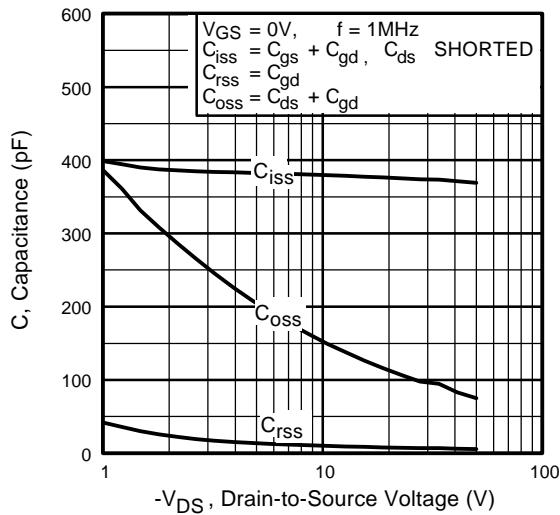


Fig 5. Typical Capacitance Vs.
Drain-to-Source Voltage

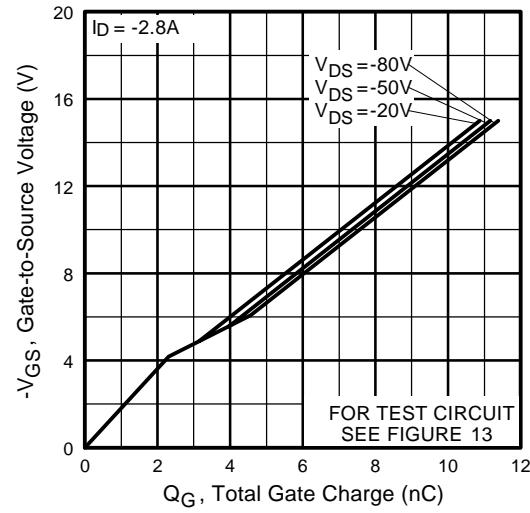


Fig 6. Typical Gate Charge Vs.
Gate-to-Source Voltage

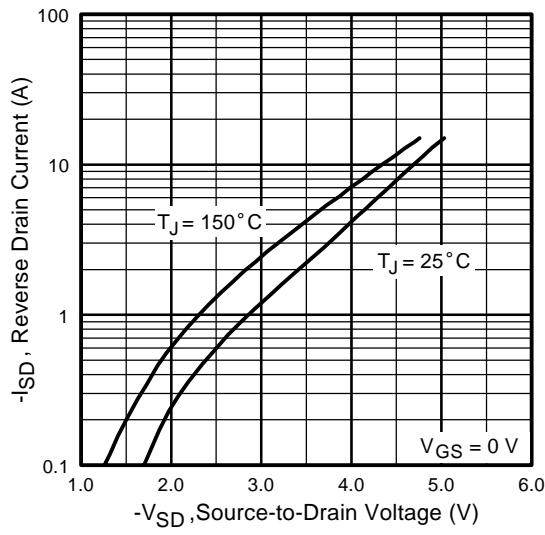


Fig 7. Typical Source-Drain Diode
Forward Voltage

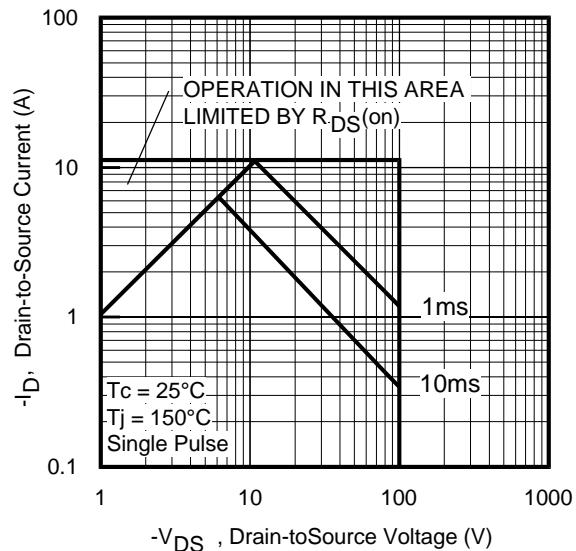


Fig 8. Maximum Safe Operating Area

IRHQ597110

Pre-Irradiation

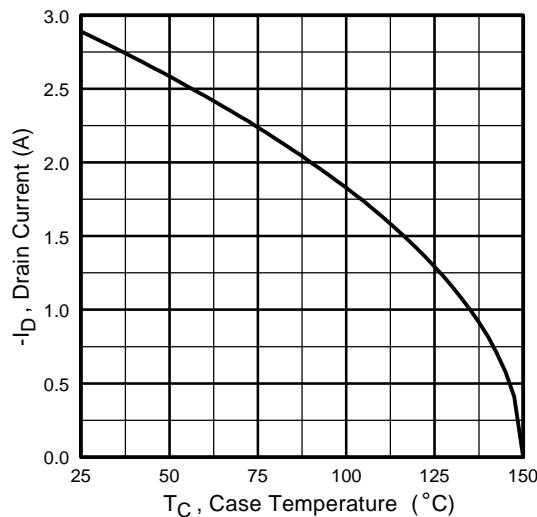


Fig 9. Maximum Drain Current Vs.
Case Temperature

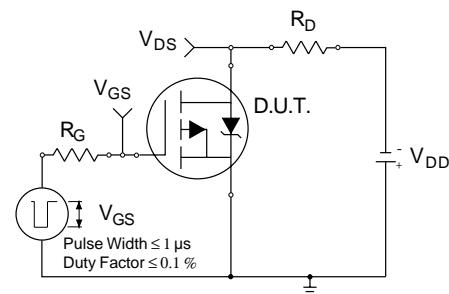


Fig 10a. Switching Time Test Circuit

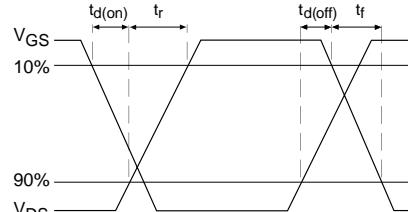


Fig 10b. Switching Time Waveforms

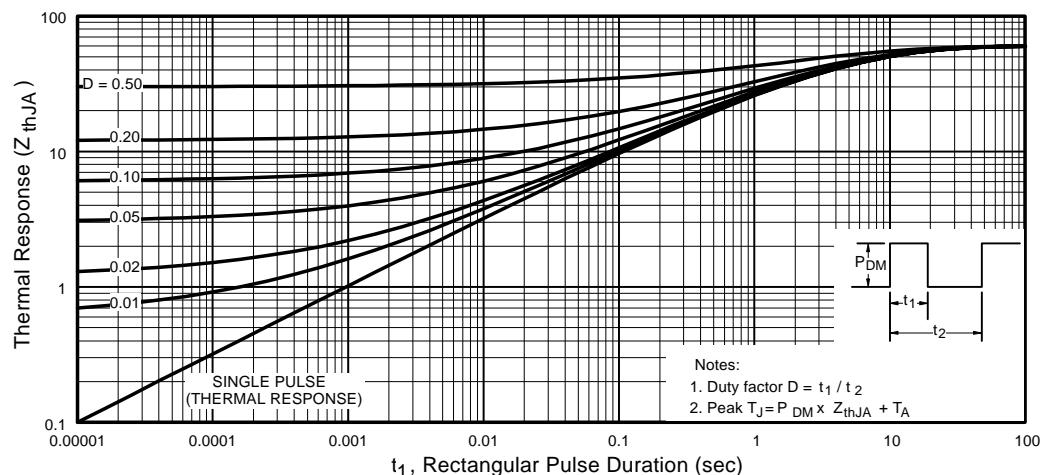


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

Pre-Irradiation

IRHQ597110

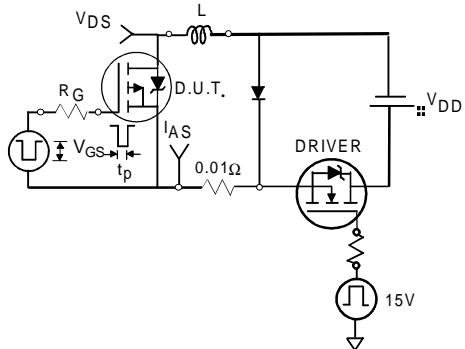


Fig 12a. Unclamped Inductive Test Circuit

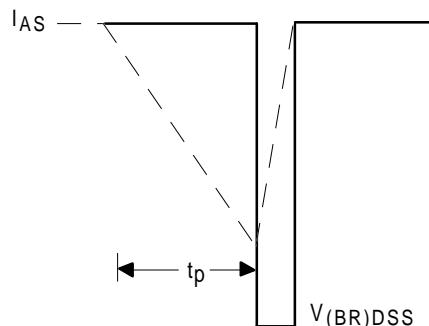


Fig 12b. Unclamped Inductive Waveforms

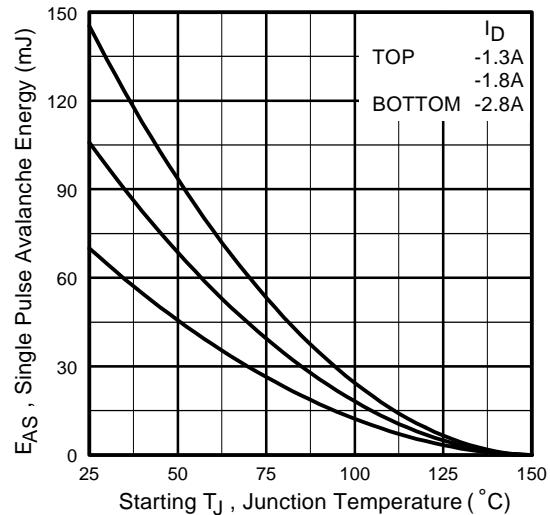


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

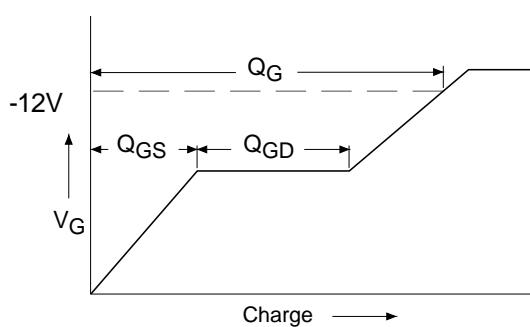


Fig 13a. Basic Gate Charge Waveform

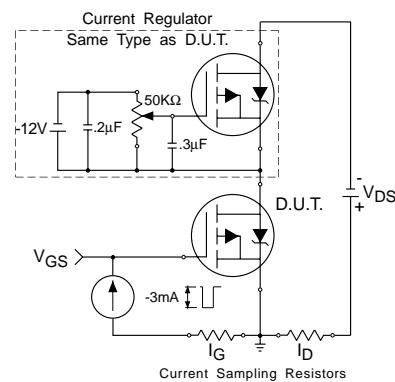
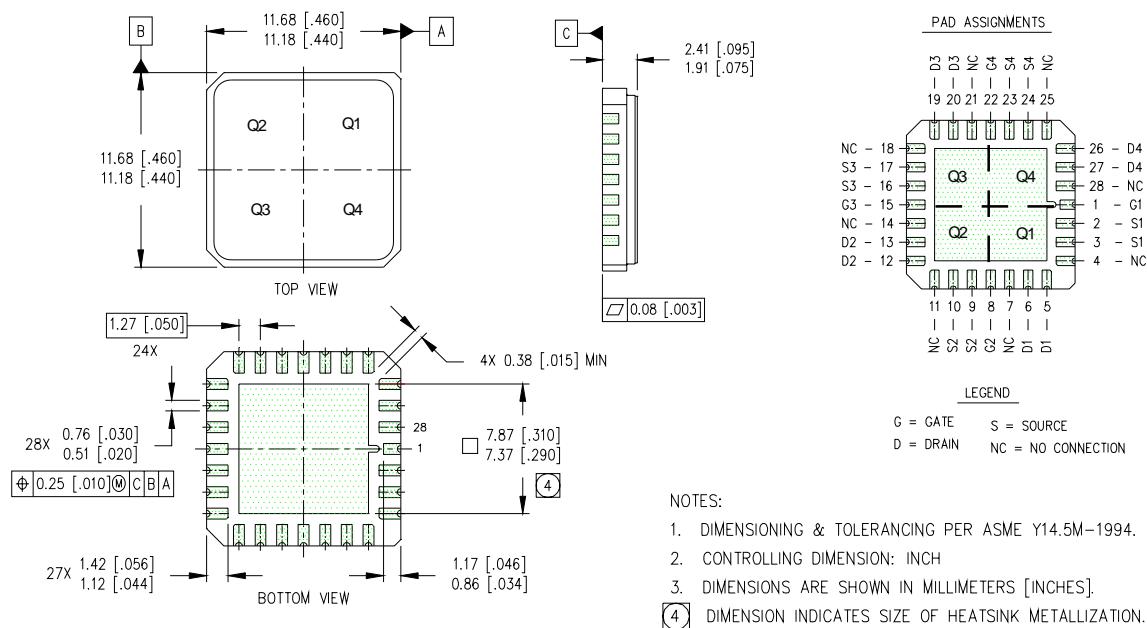


Fig 13b. Gate Charge Test Circuit

Footnotes:

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- ② $V_{DD} = -25V$, starting $T_J = 25^\circ C$, $L = 17.8mH$, Peak $I_L = -2.8A$, $V_{GS} = -12V$
- ③ $I_{SD} \leq -2.8A$, $dI/dt \leq -263A/\mu s$, $V_{DD} \leq -100V$, $T_J \leq 150^\circ C$
- ④ Pulse width $\leq 300 \mu s$; Duty Cycle $\leq 2\%$
- ⑤ **Total Dose Irradiation with V_{GS} Bias.**
-12 volt V_{GS} applied and $V_{DS} = 0$ during irradiation per MIL-STD-750, method 1019, condition A
- ⑥ **Total Dose Irradiation with V_{DS} Bias.**
-80 volt V_{DS} applied and $V_{GS} = 0$ during irradiation per MIL-STD-750, method 1019, condition A

Case Outline and Dimensions — LCC-28

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.
Data and specifications subject to change without notice. 05/01