

MA367

Silicon epitaxial planer type

For UHF and VHF electronic tuner AFC


■ Features

- Large capacity variation ratio
- Small series resistance r_D
- S-Mini package, enabling down-sizing of the equipment and automatic insertion through taping

■ Absolute Maximum Ratings (Ta= 25°C)

Parameter	Symbol	Rating	Unit
Reverse voltage (DC)	V_R	30	V
Peak reverse voltage	V_{RM}	34	V
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	– 55 to +150	°C

* $R_L = 10k\Omega$

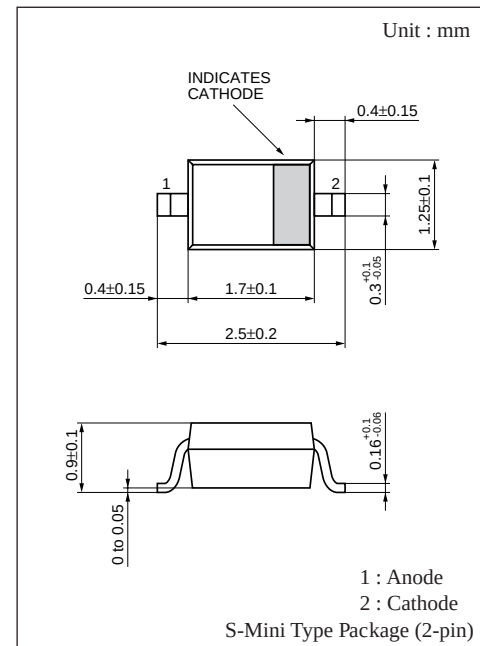

Marking Symbol : 6K

■ Electrical Characteristics (Ta= 25°C)





Parameter	Symbol	Condition	min	typ	max	Unit
Reverse current (DC)	I_R	$V_R = 30V$			10	nA
Diode capacitance	$C_{D(2V)}$	$V_R = 2V, f = 1MHz$	10.5		16.0	pF
	$C_{D(10V)}$	$V_R = 10V, f = 1MHz$	3.3		5.7	pF
Capacitance ratio	$C_{D(2V)}/C_{D(10V)}$		2.8		3.4	—
Series resistance	r_D^*	$C_D = 9pF, f = 470MHz$			1.6	Ω

Note 1. Rated input/output frequency : 470MHz

2. * r_D measurement device : YHP MODEL 4191A RF IMPEDANCE ANALYZER

■ Marking

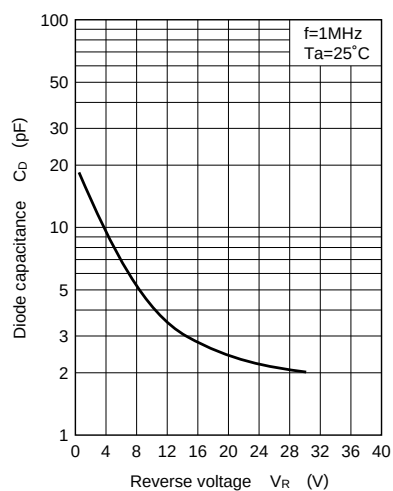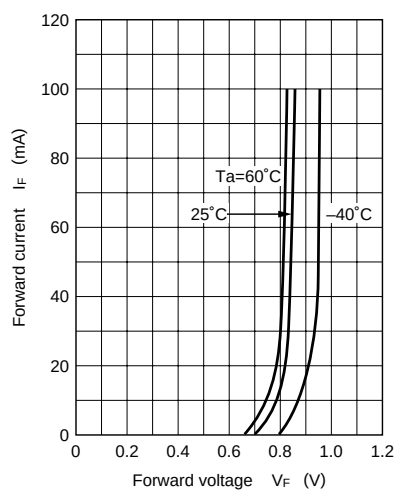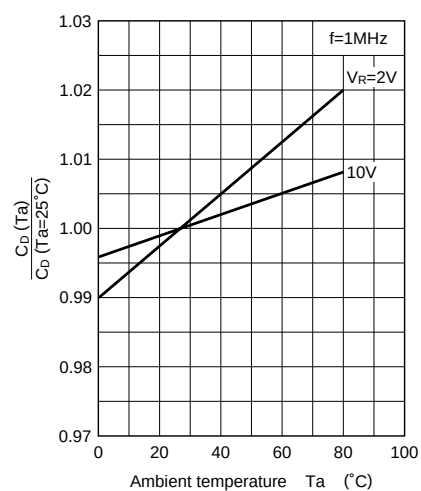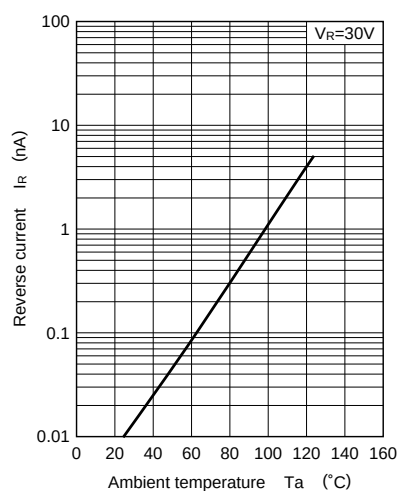

$C_D - V_R$  $I_F - V_F$  $C_D - T_a$  $I_R - T_a$  **C_D rank classification****AFC variable capacitance gap classification table**