

MA379

Silicon epitaxial planer type

For UHF tuner

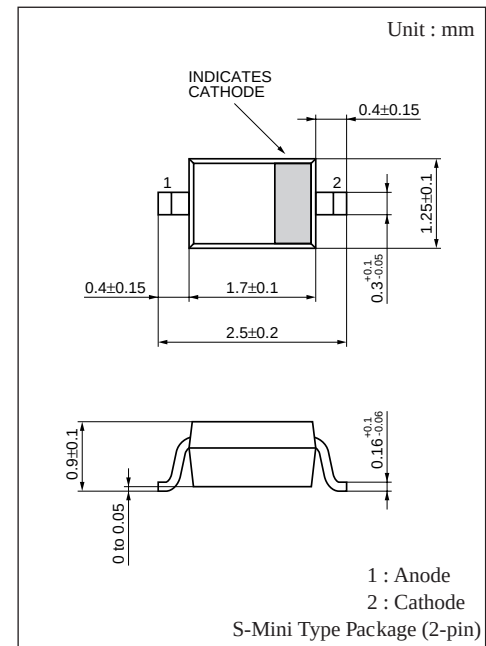
■ Features

- Large capacity variation ratio
- Small series resistance r_D
- S-Mini package, enabling down-sizing of the equipment and automatic insertion through taping

■ Absolute Maximum Ratings (Ta= 25°C)

Parameter	Symbol	Rating	Unit
Reverse voltage (DC)	V_R	32	V
Peak reverse voltage	V_{RM}^*	35	V
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	– 55 to +150	°C

* $R_L=10k\Omega$



Marking Symbol : 7L


■ Electrical Characteristics (Ta= 25°C)




Parameter	Symbol	Condition	min	typ	max	Unit
Reverse current (DC)	I_R	$V_R= 30V$			10	nA
Diode capacitance	$C_{D(2V)}$	$V_R= 2V, f= 1MHz$	5.50		6.84	pF
	$C_{D(25V)}$	$V_R= 25V, f= 1MHz$	0.84		1.05	pF
	$C_{D(10V)}$	$V_R= 10V, f= 1MHz$	1.80		2.38	pF
	$C_{D(17V)}$	$V_R= 17V, f= 1MHz$	1.03		1.36	pF
Capacitance ratio	$C_{D(2V)}/C_{D(25V)}$		6.0		7.0	—
Diode capacitance deviation	ΔC	$C_D(2V)(10V)(17V)(25V)$			2.0	%
Series resistance	r_D^*	$V_R= 5V, f= 470MHz$			1.0	Ω

Note 1. Rated input/output frequency : 470MHz

2. * r_D measurement device : YHP MODEL 4191A RF IMPEDANCE ANALYZER

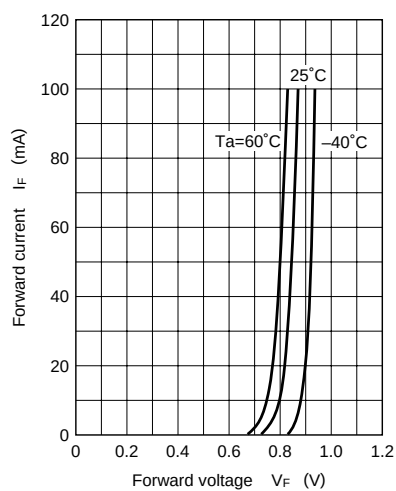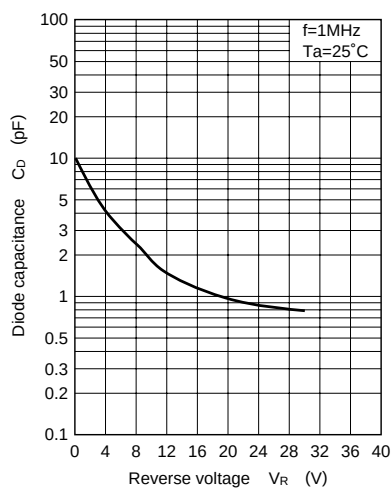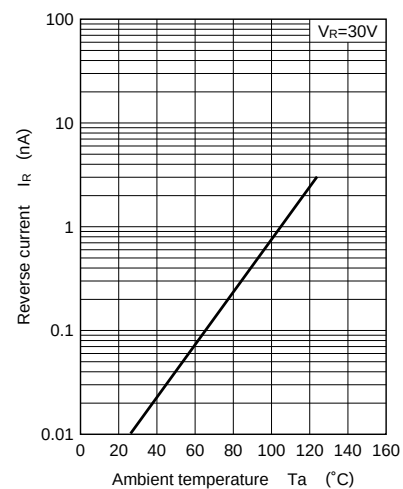■ Marking



$I_F - V_F$  $C_D - V_R$  $I_R - T_a$  $C_D - T_a$ 